

T1RZ3CK1D (Pre-wired Kit)

Rack Access and Power Integration Solution for ZKTeco



Altronix T1RZ3CK1D is a 4-door access and power integration kit which includes Altronix power and sub-assemblies along with factory installed wire management and wire assemblies that are pre-configured with terminal blocks for ZKTeco hardware. This unit provides ample power and dual voltage outputs to support ZKTeco platform controllers and locking devices. The T1RZ3CK1D accommodates one (1) Atlas 460 four (4) door controller. Trove Plus simplifies field installations and provides reliable, robust critical power and control for the most demanding applications.



T1RZ3CK1D - includes eFlow6RLB, ACMS8CB, VR6, wire harnesses and management

ZKTeco boards are not included

Key Features

- Accommodates the following ZKTeco controllers:
 - 1 - Atlas 460
- Power status LED on front panel
- Simplified board layout and wire management
- Convenient knockout configuration:
 - Four (4) double knockouts - 3/4" Conduit and 1" Conduit
 - Two (2) double knockouts - 1/2" Conduit and 3/4" Conduit
- 6' IEC320 3-wire power cord
- 2U drawer on extendable rails
- Black powder coated steel enclosure
- Included Z Bracket facilitates ease of wiring
- Includes cam lock, tamper switch and mounting hardware
- CE European Conformity
- Lifetime Warranty*

**Altronix Power Supply/Charger and Sub-Assemblies only*

Accessories (order separately)



RE2

RE2 - Rack Mount Battery Enclosure

accommodates up to four (4) 12VDC/7AH batteries



WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.

Specifications

Power Supply/Charger (eFlow6RLB):

Input

Voltage	120VAC, 60Hz. 3.5A
Input Fuse	5A/250V

Output

Voltage	24VDC
Current	6A continuous
Auxiliary	1A (unswitched)
Other	Overvoltage protection. Filtered and regulated

Battery Charging

Type	Sealed lead acid or gel type
Failover	Upon AC loss, instantaneous
Batteries are sold separately	

Supervision

AC Failure	Form "C" contacts
Battery	Form "C" contacts

Low DC Power Shutdown

Shuts down DC output terminals if battery voltage drops below 70-75% for 24V units (depending on the power supply)
Prevents deep battery discharge

Indicators (LED)

Input	120VAC is present
DC Output	Powered
Battery	Discharged or not connected

Voltage Regulator (VR6):

Input

Voltage	24VDC from eFlow6RLB
---------	----------------------

Output

Voltage	12VDC
Current	6A continuous
Other	Surge suppression

Indicators (LED)

Input	24VDC is present
Output	Powered

Dual Input Access Power Controller (ACMS8CB):

Input

Voltage	24VDC from eFlow6RLB and 12VDC from VR6
---------	---

Input PTCs

9A

Outputs

Voltage	24VDC
Eight (8) 24VDC independently controlled PTC outputs	
a) Fail-Safe and/or Fail-Secure power outputs	
Form "C" Relays rated 28VAC or VDC @ 2.5A	
b) Auxiliary power outputs (unswitched)	
c) Any combination of the above	

Output PTCs	2.5A
-------------	------

Indicators (LED)

Red LEDs	Outputs are triggered (relays energized)
Green LED	FACP disconnect is triggered

T1RZ3CK1D Kit:

Agency Listings

CE	European Conformity
----	---------------------

Physical and Environmental:

Dimensions (H x W x D):

Modular 2U standard EIA 19" rack mount chassis
Enclosure: 3.25" x 19.0" x 26.5" (82.6mm x 482.6mm x 673.1mm)
Shipping: 31" x 23" x 8.25" (787.4mm x 584.2mm x 209.6mm)

Weights (approx.):


Product:	20 lb. (9.07 kg)
Shipping:	25 lb. (11.34 kg)

Temperature

Operating:	0°C to 49°C (32°F to 120°F)
Storage:	- 20°C to 70°C (- 4°F to 158°F)

Relative Humidity	85% +/- 5%
-------------------	------------

BTU/Hr.:	87 BTU/Hr.
----------	------------

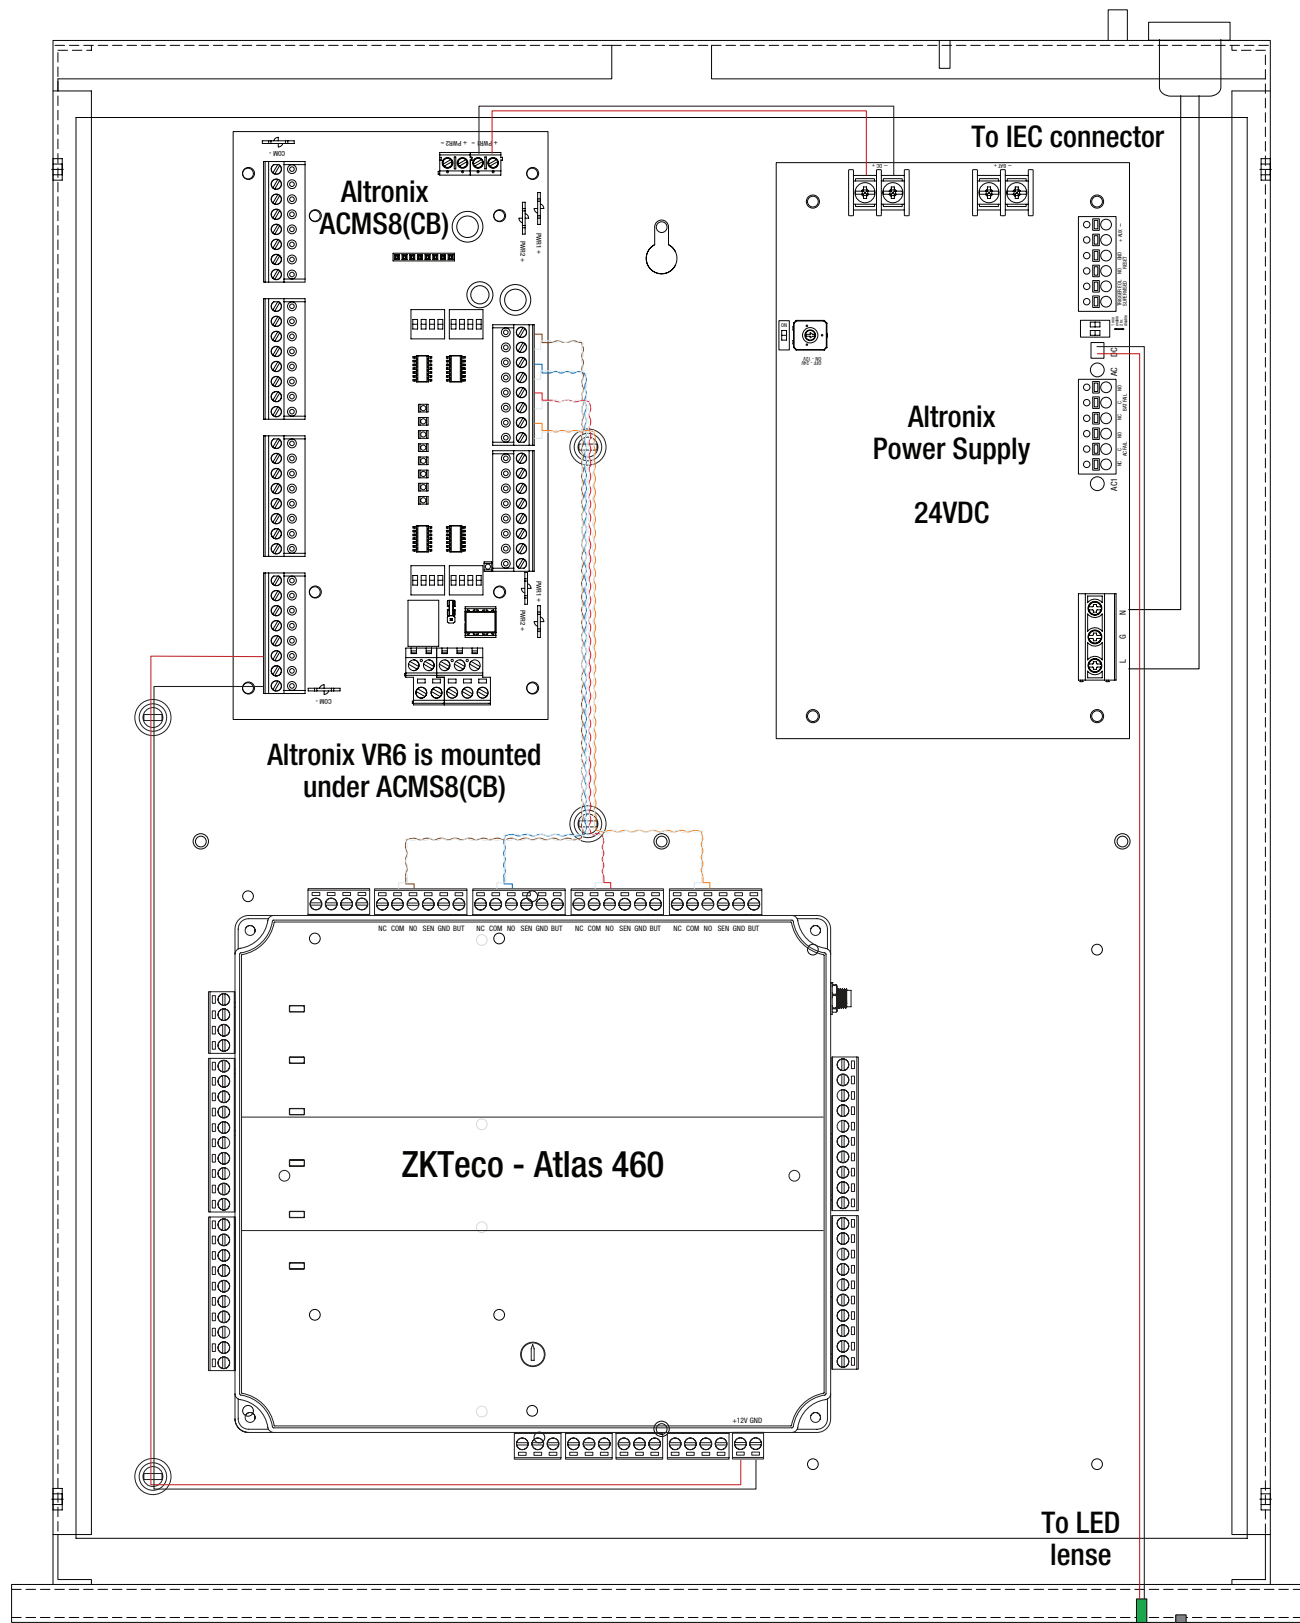



Dimensions (H x W x D approximate)

3.25" x 19.0" x 26.5" (82.6mm x 482.6mm x 673.1mm)

