

## T2HCK75F16D (Kit)

Access & Power Integration Solution for Hartmann



Altronix T2HCK75F16D kit consists of Trove2 enclosure and THC2 Hartmann Controls/ Altronix backplane with 12VDC @ 10A and 24VDC @ 10A power supply/chargers and two (2) PTC dual input Access Power Controllers. This kit also accommodates up to two (2) PRS\_MASTER and eight (8) PRS\_TDM, PRS\_IO8 modules for up to sixteen (16) doors in a single enclosure. Trove simplifies board layout and wire management, reduces installation time and labor costs.



T2HCK75F16D

*Hartmann Controls boards are not included*

### Key Features

- 12VDC & 24VDC power supply/chargers.
- Accommodates up to two (2) PRS\_MASTER and eight (8) PRS\_TDM or PRS\_IO8 modules
- Convenient knockout configuration:
  - One (1) single knockout 2.415" (2" Conduit).
  - Sixteen (16) double knockouts 1.362" (1" Conduit) / 1.115" (3/4" Conduit)
- Supervision
  - AC Fail
  - Low Battery and Battery Presence
  - Low power shutdown
- Agency Listings:
  - All Altronix components of this Trove kit are UL Listed sub-assemblies. Please refer to the Sub-Assembly Installation Guides for further information
    - UL: UL294 - Access Control System.
    - cUL: CAN/ULC - s319-05 - Electronic Access Control Systems
  - CE European Conformity
- 16 gauge galvanized steel backplane simplifies board layout and wire management
- Enclosure accommodates up to four (4) 12VDC/12AH batteries
- Lifetime Warranty\*

*\*Altronix Power Supply/Charger and Sub-Assemblies only*

**Specifications**
**Power Supply 1 (eFlow104NB):**
**Input**

Voltage	120VAC, 60Hz, 4.5A max.
Input Fuse	6.3A/250V

**Output**

Voltage	24VDC @ 10A
Auxiliary	1A (unswitched).
Protection	Overvoltage protection. Filtered and regulated

**Power Supply 2 (eFlow102NB):**
**Input**

Voltage	120VAC, 60Hz, 3.5A max.
Input Fuse	5A/250V

**Output**

Voltage	12VDC @ 10A
Auxiliary	1A (unswitched)
Protection	Overvoltage protection. Filtered and regulated

**Both Power Supplies:**
**Battery Charging**

Capacity	12VDC/12AH (4 within enclosure) 40AH/65AH (requires separate enclosure)
Type	Sealed lead acid or gel type
Failover	Upon AC loss, instantaneous
Batteries are sold separately	

**Fire Alarm Disconnect**

Supervised	Latching or non-latching
EOL	10K Resistor

**Supervision**

AC Failure	Form "C" contacts
Battery	Form "C" contacts

**Low DC Power Shutdown**

Shuts down DC output terminals if battery voltage drops below 71-73% for 12V units and 70-75% for 24V units (depending on the power supply). Prevents deep battery discharge

**Indicators (LED)**

AC Input	120VAC is present
DC Output	Powered
Battery	Discharged or not connected

**Two (2) Dual Input Access Power Controllers (ACMS8CB):**
**Input**

Voltage	24VDC from eFlow104NB and 12VDC from eFlow102NB
---------	--

Input PTCs	9A
------------	----

**Outputs**

Voltage	12 or 24VDC individually selectable
Eight (8) selectable 12VDC - 24VDC independently controlled outputs or eight (8) independently controlled Form "C" relay outputs:	
a) Fail-Safe and/or Fail-Secure power outputs	
b) Form "C" Relays. 28VAC or VDC @ 2.5A Rated	
c) Auxiliary power outputs (unswitched)	
d) Any combination of the above	

Any of the eight (8) PTC protected power outputs are selectable to follow power Input 1 or Input 2

Individual outputs may be set to OFF position for servicing

Output PTCs	2.5A
-------------	------

**Indicators (LED)**

Red LEDs	Outputs are triggered (relays energized)
Blue LED	FACP disconnect is triggered
<b>Individual voltage LEDs:</b>	
Green:	12VDC
Red:	24VDC

**T2HCK75F16D Kit:**
**Agency Listings**

All components of this Trove kit are UL Listed sub-assemblies. Please refer to the corresponding Sub-Assembly Installation Guides for further information.

CE	European Conformity
----	---------------------

**Physical and Environmental:**
**Dimensions (H x W x D)**

Enclosure:	27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)
Shipping:	32.5" x 26.5" x 11.125" (825.5mm x 673.1mm x 282.6mm)

**Weight (approx.)**

Product:	41.3 lb. (18.2 kg)
Shipping:	45.05 lb. (19.9 kg)

**Temperature**


Operating:	0°C to 49°C (32°F to 120°F)
Storage:	- 20°C to 70°C (- 4°F to 158°F)

Relative Humidity	85% +/- 5%
-------------------	------------

BTU/Hr. (approx.):	184 BTU/Hr.
--------------------	-------------

**Access Controller Position Chart for the Following Models:**

Hartmann Controls	Pem Mounting
PRS_MASTER	(A)
PRS_TDM, PRS_I08	(B)

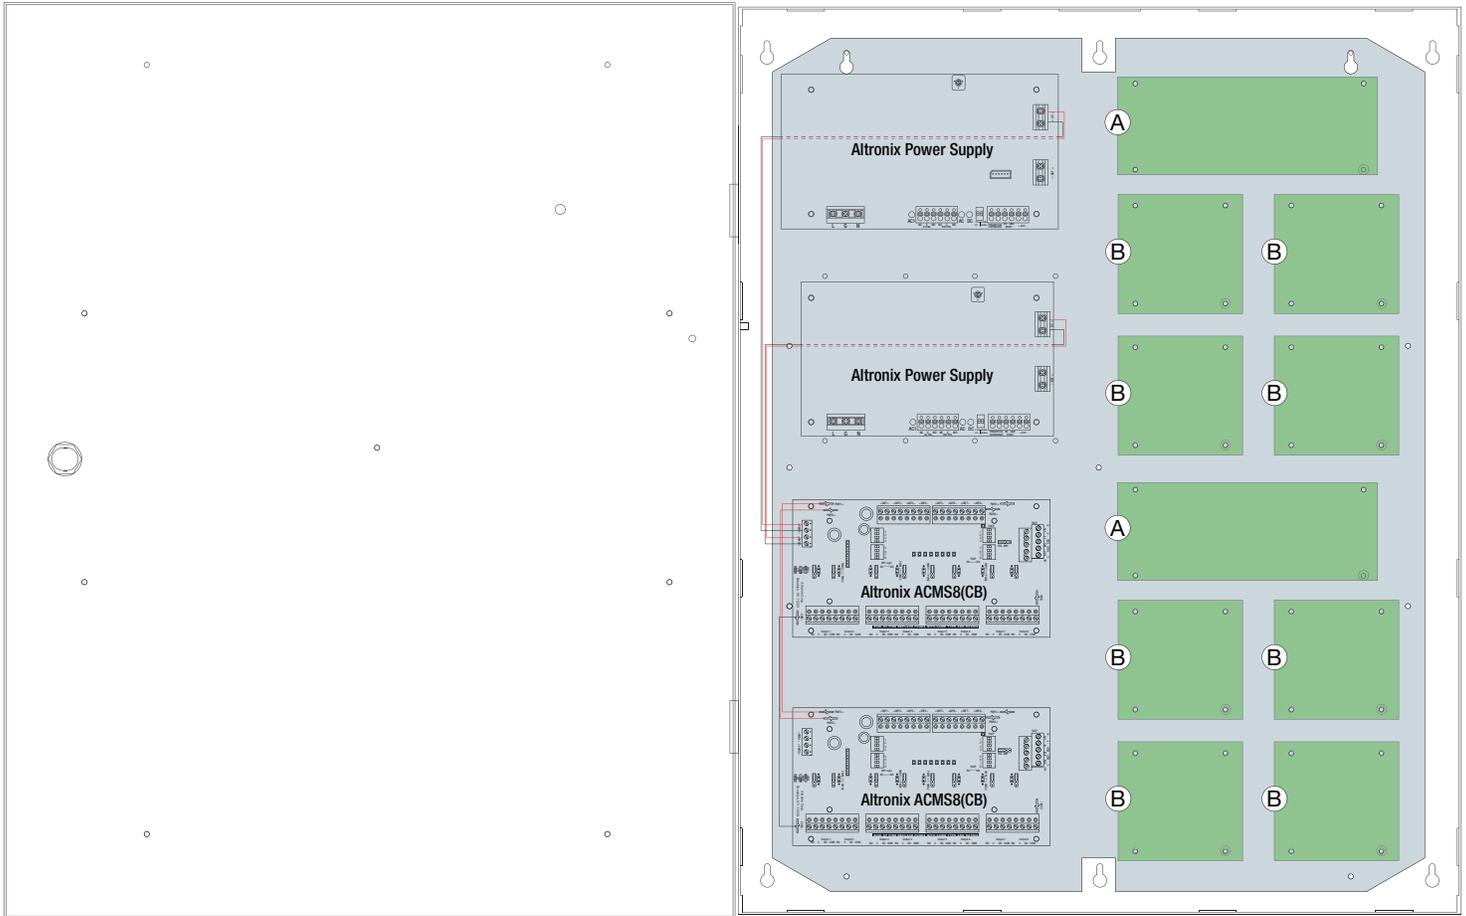

**Accessories** (order separately)



LINQ2

**LINQ2 - Network Supervision**

Altronix LINQ2 Network Communication Module provides remote supervision, control and monitoring over LAN/WAN

- Remotely reports accurate power diagnostics
- Controls power and resets devices
- Reports system diagnostics via Email



WM5

**WM5, WM25, WM100 - Magnetic Cable Tie Mounts**

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

**MM4, MM8, MM12, MM24 - Magnetic Mounting Solution**

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.



BR1

**BR1 - Sub-Assembly Mounting Bracket**

Altronix BR1 mounting bracket is compatible with Altronix Maximal and Trove enclosures. It allows to mount one (1) PD4UL(CB), PD8UL(CB), ACM4(CB), MOM5, VR6, PDS8, NetWay5B or LINQ8PD(CB) sub-assembly on the enclosure's inside wall, saving valuable space.

Trove2BWC  
with  
batteries



Trove2BWC  
with  
wires



**TROVE2BWC - Battery/Wire Trough Enclosure**

Altronix Trove2BWC is a dual-purpose enclosure that can be used as wiring trough or battery cabinet when mounted above or below of the Trove2 integrated power and access solution. The knockouts on the Trove2BWC have been strategically placed to line up with the Trove2 allowing for easy conduit connections between cabinets. Trove2BWC includes cam locks and 2 tamper switches to ensure access to wiring and batteries is secure.

**Dimensions and Drawing**

Dimensions (H x W x D approximate)

27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)

