Altronix®

Rev. 06062023

T2KE33F16D (Kit)

Access & Power Integration Solution for Kisi

TROVE™

Altronix T2KE33F16D kit consists of Trove2 enclosure, TDR2 Kisi/Altronix backplane with two (2) 12 or 24VDC @ 6A power supply/chargers, and two (2) eight (8) PTC protected output access control modules. This kit also accommodates up to four (4) Kisi Pro Controllers for up to sixteen (16) doors in a single enclosure. Trove simplifies board layout and wire management, reduces installation time and labor costs.

kisi

T2KE33F16D

Kisi boards are not included

Key Features

- 12VDC or 24VDC power supply/chargers
- Accommodates up to four (4) Kisi Pro Controllers
- Includes twenty (20) mounting magnets for Kisi Pro Controller
- Convenient knockout configuration:
  - One (1) single knockout 2.415" (2" Conduit)
  - Sixteen (16) double knockouts 1.362" (1" Conduit) / 1.115" (3/4" Conduit)
- Supervision
  - AC Fail
  - Low Battery and Battery Presence
  - Low power shutdown
- Agency Listings:
  - All Altronix components of this Trove kit are UL Listed sub-assemblies. Please refer to the Sub-Assembly Installation Guides for further information
    - UL: UL294 - Access Control System
    - cUL: CAN/ULC - s319-05 - Electronic Access Control Systems
  - CE European Conformity
- 16 gauge galvanized steel backplane simplifies board layout and wire management
- Enclosure accommodates up to four (4) 12VDC/12AH batteries
- Lifetime Warranty*

**Altronix Power Supply/Chargers and Sub-Assemblies only*

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA
phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

Altronix®

T2KE33F16D (Kit)

Access & Power Integration Solution for Kisi

TROVE™

Specifications

Two (2) Power Supply/Chargers (eFlow6NB):

Input

Voltage	120VAC, 60Hz, 3.5A
Input Fuse	5A/250V

Outputs

Voltage	12VDC or 24VDC selectable
Current	6A continuous max.
Auxiliary	Power-limited @ 1A (unswitched)
Other	Overvoltage protection. Filtered and regulated

Battery Charging

Capacity	12AH/12VDC (4 within enclosure) 40AH/65AH (requires separate enclosure)
Type	Sealed lead acid or gel type
Failover	Upon AC loss, instantaneous

Batteries are sold separately

Fire Alarm Disconnect

Supervised	Latching or non-latching
EOL	10K Resistor

Supervision

AC Failure	Form "C" contacts
Battery	Form "C" contacts

Low DC Power Shutdown

Shuts down DC output terminals if battery voltage drops below 71-73% for 12V units and 70-75% for 24V units (depending on the power supply). Prevents deep battery discharge

Indicators (LED)

Input	120VAC is present
DC Output	Powered

Two (2) Access Power Controllers (ACM8CB):

Input

Voltage	24VDC from eFlow6NB
Input Fuse	10A/250V

Outputs

Voltage	24VDC

Eight (8) 24VDC independently controlled PTC outputs:

a) Fail-Safe and/or Fail-Secure power outputs
Form "C" Relays rated 28VAC or VDC @ 2.5A

b) Auxiliary power outputs (unswitched)

c) Any combination of the above

Output PTCs	2.5A

Indicators (LED)

Red LEDs	Outputs are triggered (relays energized)
Green LED	FACP disconnect is triggered

T2KE33F16D Kit:

Agency Listings

All components of this Trove kit are UL Listed sub-assemblies
Please refer to the corresponding Sub-Assembly Installation Guides for further information

CE	European Conformity

Physical and Environmental

Dimensions (H x W x D)

Enclosure:
27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)

Shipping:
32.5" x 26.5" x 11.125" (825.5mm x 673.1mm x 282.6mm)

Weight (approx.)

Product	54.7 lb. (24.8 kg)
Shipping	59.7 lb. (27.1 kg)

Temperature

Operating	0ºC to 49ºC (32ºF to 120ºF)
Storage	– 20ºC to 70ºC (– 4ºF to 158ºF)
Relative Humidity	85% +/– 5%
BTU/Hr (approx.):	12VDC: 74 BTU/Hr. 24VDC: 148 BTU/Hr. 12VDC and 24VDC: 111 BTU/Hr.

T2KE33F16D (Kit)

Access & Power Integration Solution for Kisi

Access Controller Position Chart for the Following Models:

Kisi	Pem Mounting
Pro Controller	A

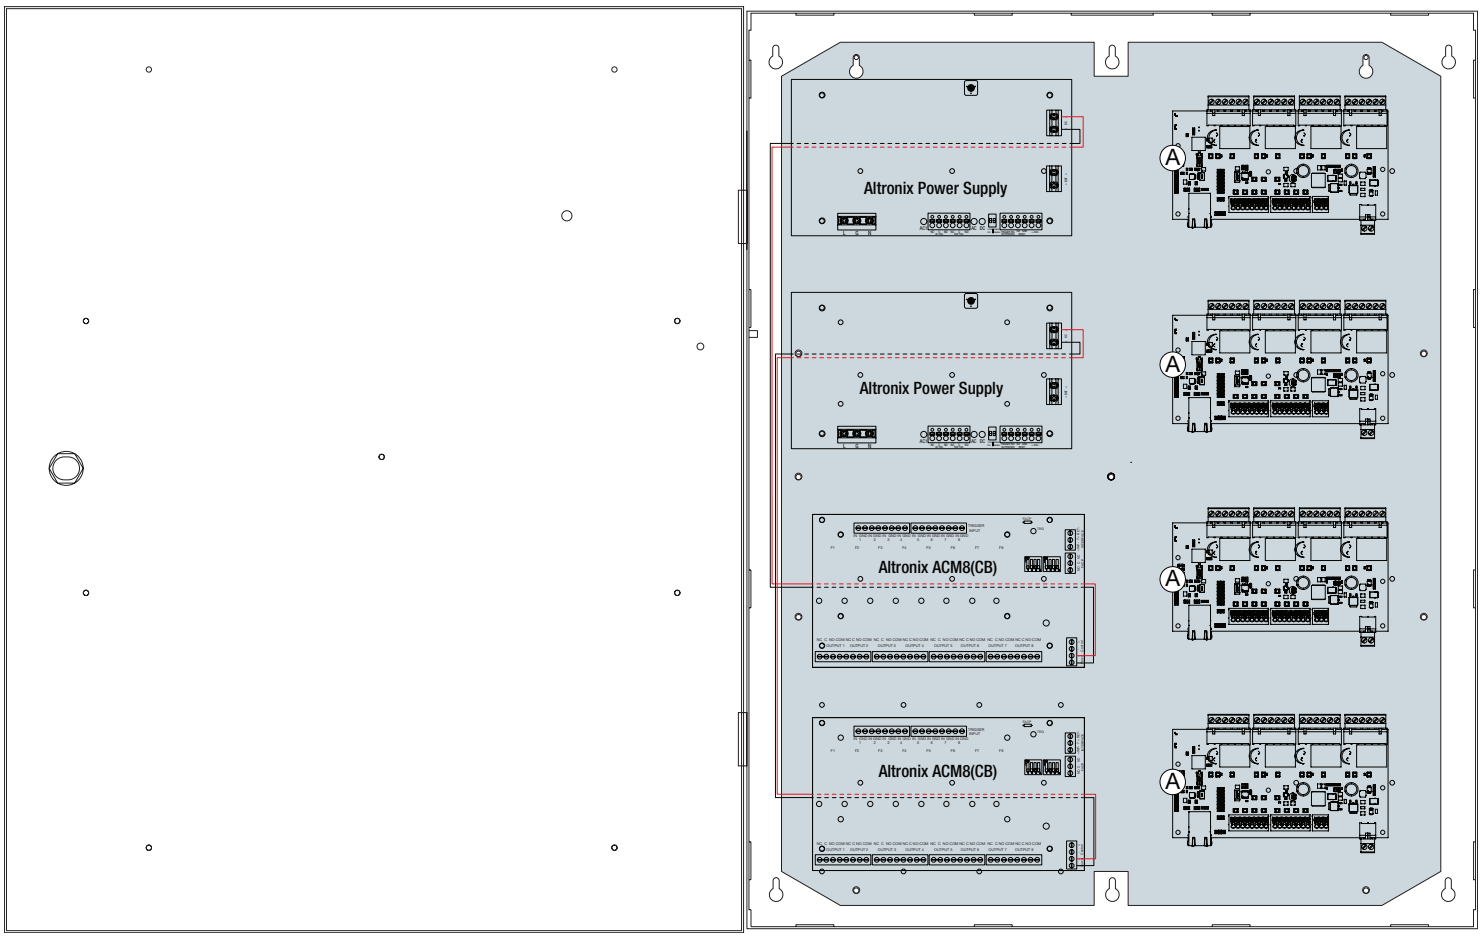

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA
phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

T2KE33F16D (Kit)

Access & Power Integration Solution for Kisi

Accessories (order separately)

LINQ2

LINQ2 - Network Supervision

Altronix LINQ2 Network Communication Module provides remote supervision, control and monitoring over LAN/WAN

- Remotely reports accurate power diagnostics
- Controls power and resets devices
- Reports system diagnostics via Email

WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps.
These are ideal for wire management in our Trove series.

Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.

BR1

BR1 - Sub-Assembly Mounting Bracket

Altronix BR1 mounting bracket is compatible with Altronix Maximal and Trove enclosures. It allows to mount one (1) PD4UL(CB), PD8UL(CB), ACM4(CB), MOM5, VR6, PDS8, NetWay5B or LINQ8PD(CB) sub-assembly on the enclosure's inside wall, saving valuable space.

Trove2BWC with batteries

Trove2BWC with wires

TROVE2BWC - Battery/Wire Trough Enclosure

Altronix Trove2BWC is a dual-purpose enclosure that can be used as wiring trough or battery cabinet when mounted above or below of the Trove2 integrated power and access solution.The knockouts on the Trove2BWC have been strategically placed to line up with the Trove2 allowing for easy conduit connections between cabinets.Trove2BWC includes cam locks and 2 tamper switches to ensure access to wiring and batteries is secure.

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA
phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

Altronix®

T2KE33F16D (Kit)

Access & Power Integration Solution for Kisi

TROVE™

Dimensions and Drawing

Dimensions (H x W x D approximate)

27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)

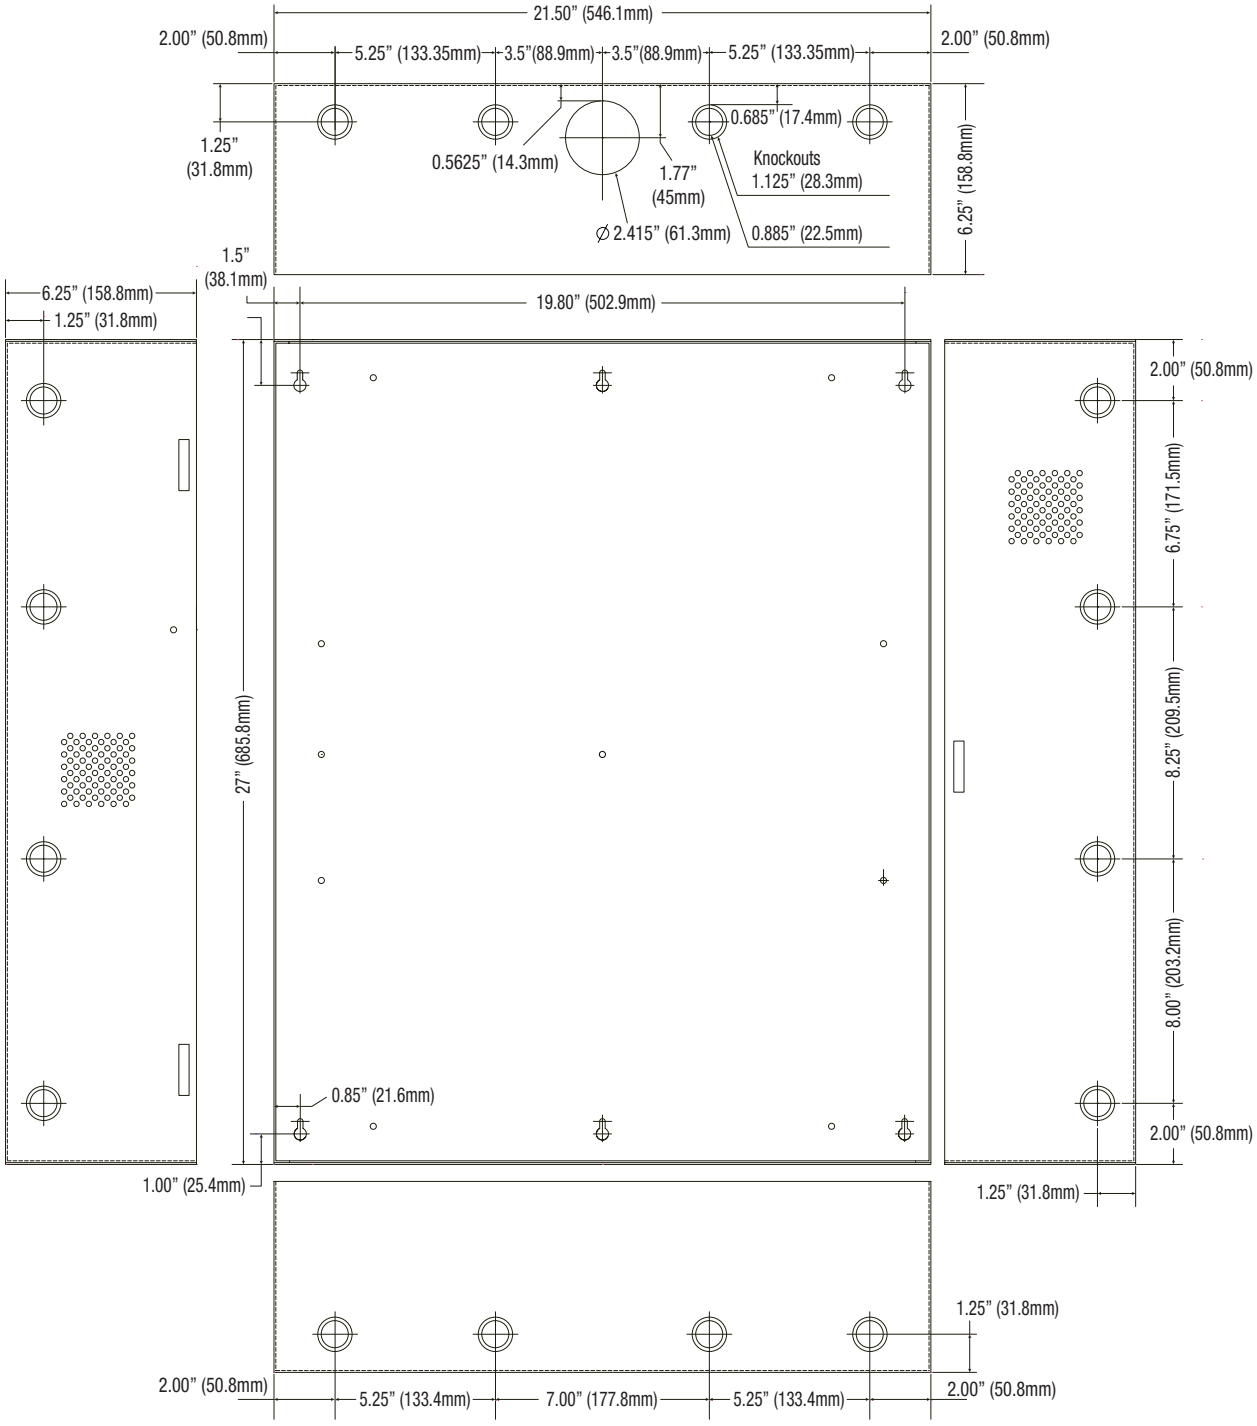

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com