Altronix®

Rev. 04242024

T2KK3F8Q (Kit)

Access & Power Integration Solution for Keyscan

TROVE™

Altronix T2KK3F8Q kit consists of Trove2 enclosure, TKA2 Keyscan/Altronix backplane with one (1) 24VDC @ 6A power supply/charger, one (1) Network communication module, one (1) fused access power controller, and one (1) 16VAC transformer.

This kit also accommodate various combinations of Keyscan boards for up to eight (8) doors in a single enclosure. Trove simplifies board layout and wire management, reduces installation time and labor costs.

KEYSCAN
ACCESS CONTROL SYSTEMS

T2KK3F8Q

Keyscan modules are not included

Key Features

- 24VDC power supply/charger
- Accommodates the following Keyscan controllers:
  either CA250B, CA4500B or CA8500B
  up to two (2) OCB8, and one (1) of each DPS15 and CIM
- Convenient knockout configuration:
  - One (1) single knockout 2.415" (2" Conduit)
  - Sixteen (16) double knockouts
    1.362" (1" Conduit) / 1.115" (3/4" Conduit)
- Management interface for up to two (2)
  eFlow power supply/chargers
- Management interface software included (USB flash drive)
- Supervision
  - AC Fail
  - Low Battery and Battery Presence
  - Low power shutdown
- Agency Listings:
  - CE European Conformity
- 16 gauge galvanized steel backplane simplifies board layout and wire management
- Enclosure accommodates up to four (4) 12VDC/12AH batteries
- Lifetime Warranty*

**Altronix Power Supply/Chargers and Sub-Assemblies only*

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA
phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

T2KK3F8Q (Kit)

Access & Power Integration Solution for Keyscan

Specifications

Power Supply/Charger (eFlow6NB):

Input

Voltage	120VAC, 60Hz, 3.5A max.
Input Fuse	5A/250V.

Outputs

Voltage	12VDC or 24VDC selectable
Current	6A continuous max.
Auxiliary	Power-limited @ 1A (unswitched)
Other	Overvoltage protection. Filtered and regulated

Battery Charging

Capacity	12AH/12VDC (4 within enclosure) 40AH/65AH (requires separate enclosure)
Type	Sealed lead acid or gel type
Failover	Upon AC loss, instantaneous

Batteries are sold separately

Fire Alarm Disconnect

Supervised	Latching or non-latching
EOL	10K Resistor

Supervision

AC Failure	Form "C" contacts
Battery	Form "C" contacts

Low DC Power Shutdown

Shuts down DC output terminals if battery voltage drops below 71-73% for 12V units and 70-75% for 24V units (depending on the power supply)
Prevents deep battery discharge

Indicators (LED)

Input	120VAC is present
DC Output	Powered

Network Communication Module (LINQ2):

Status Monitoring

AC status; Output current draw; Unit's temperature;
DC output voltage; Low Battery/Battery presence detection
Input trigger state change; Output (relay and power supply) state change

Programming

Battery service date indication
Programmable via USB or web browser
Automated timed events:
- Control output relays and power supply via flexible timing parameter

Reporting

Programmable dashboard notifications
E-mail notification selectable by event
Event log tracks history (100+ events)

Indicators (LED)

Blue LED:	Power ON

Transformer (T16100):

Input

Voltage	115VAC, 50/60Hz, 1A

Output

Voltage	16VAC/100VA. 6.25A supply current

Access Power Controller (ACM8):

Input

Voltage	24VDC from eFlow6NB
Input Fuse	10A/250V

Outputs

Voltage	24VDC

Eight (8) independently controlled fused outputs:
a) Fail-Safe and/or Fail-Secure power outputs
Form "C" Relays rated 28VAC or VDC @ 2.5A
b) Auxiliary power outputs (unswitched)
c) Any combination of the above

Output Fuses	3.5A/250V

Indicators (LED)

Red LEDs	Outputs are triggered (relays energized)
Green LED	FACP disconnect is triggered

T2KK3F8Q Kit:

Agency Listings

CE	European Conformity

Physical and Environmental:

Dimensions (H x W x D)
Enclosure:
27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)
Shipping:
32.5" x 26.5" x 11.125" (825.5mm x 673.1mm x 282.6mm)

Weight (approx.)

Product:	41.3 lb. (18.73 kg)
Shipping:	47.3 lb. (21.45 kg)

Temperature

Operating	0ºC to 49ºC (32ºF to 120ºF)
Storage	– 20ºC to 70ºC (– 4ºF to 158ºF)
Relative Humidity	85% +/– 5%
BTU/Hr. (approx.):	12VDC: 74 BTU/Hr. 24VDC: 148 BTU/Hr.

T2KK3F8Q (Kit)

Access & Power Integration Solution for Keyscan

Access Controller Position Chart for the Following Models:

Keyscan	Pem Mounting
CA250B, CA4500B, CA8500B	A
OCB8	B
DPS15	C
CIM	D

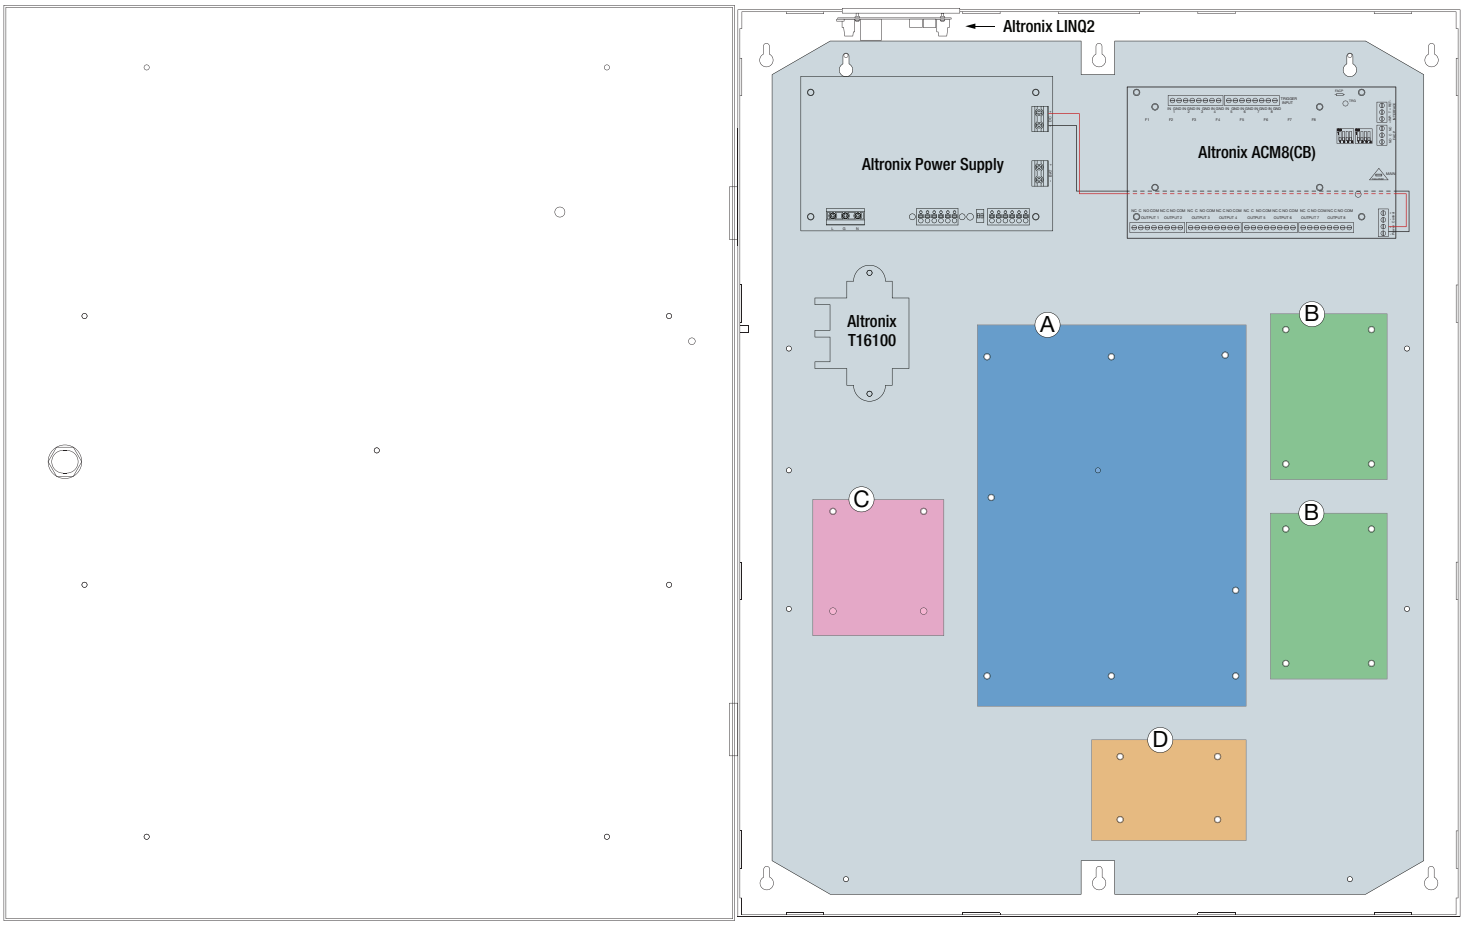

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA
phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

Altronix®

T2KK3F8Q (Kit)

Access & Power Integration Solution for Keyscan

TROVE™

Accessories (order separately)

WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps.
These are ideal for wire management in our Trove series.

Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.

BR1

BR1 - Sub-Assembly Mounting Bracket

Altronix BR1 mounting bracket is compatible with Altronix Maximal and Trove enclosures. It allows to mount one (1) PD4UL(CB), PD8UL(CB), ACM4(CB), MOM5, VR6, PDS8, NetWay5B or LINQ8PD(CB) sub-assembly on the enclosure's inside wall, saving valuable space.

Trove2BWC with batteries

Trove2BWC with wires

TROVE2BWC - Battery/Wire Trough Enclosure

Altronix Trove2BWC is a dual-purpose enclosure that can be used as wiring trough or battery cabinet when mounted above or below of the Trove2 integrated power and access solution.The knockouts on the Trove2BWC have been strategically placed to line up with the Trove2 allowing for easy conduit connections between cabinets.Trove2BWC includes cam locks and 2 tamper switches to ensure access to wiring and batteries is secure.

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA
phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

Altronix®

T2KK3F8Q (Kit)

Access & Power Integration Solution for Keyscan

TROVE™

Dimensions and Drawing

Dimensions (H x W x D approximate)

27.25” x 21.5” x 6.5” (692.2mm x 546.1mm x 165.1mm)

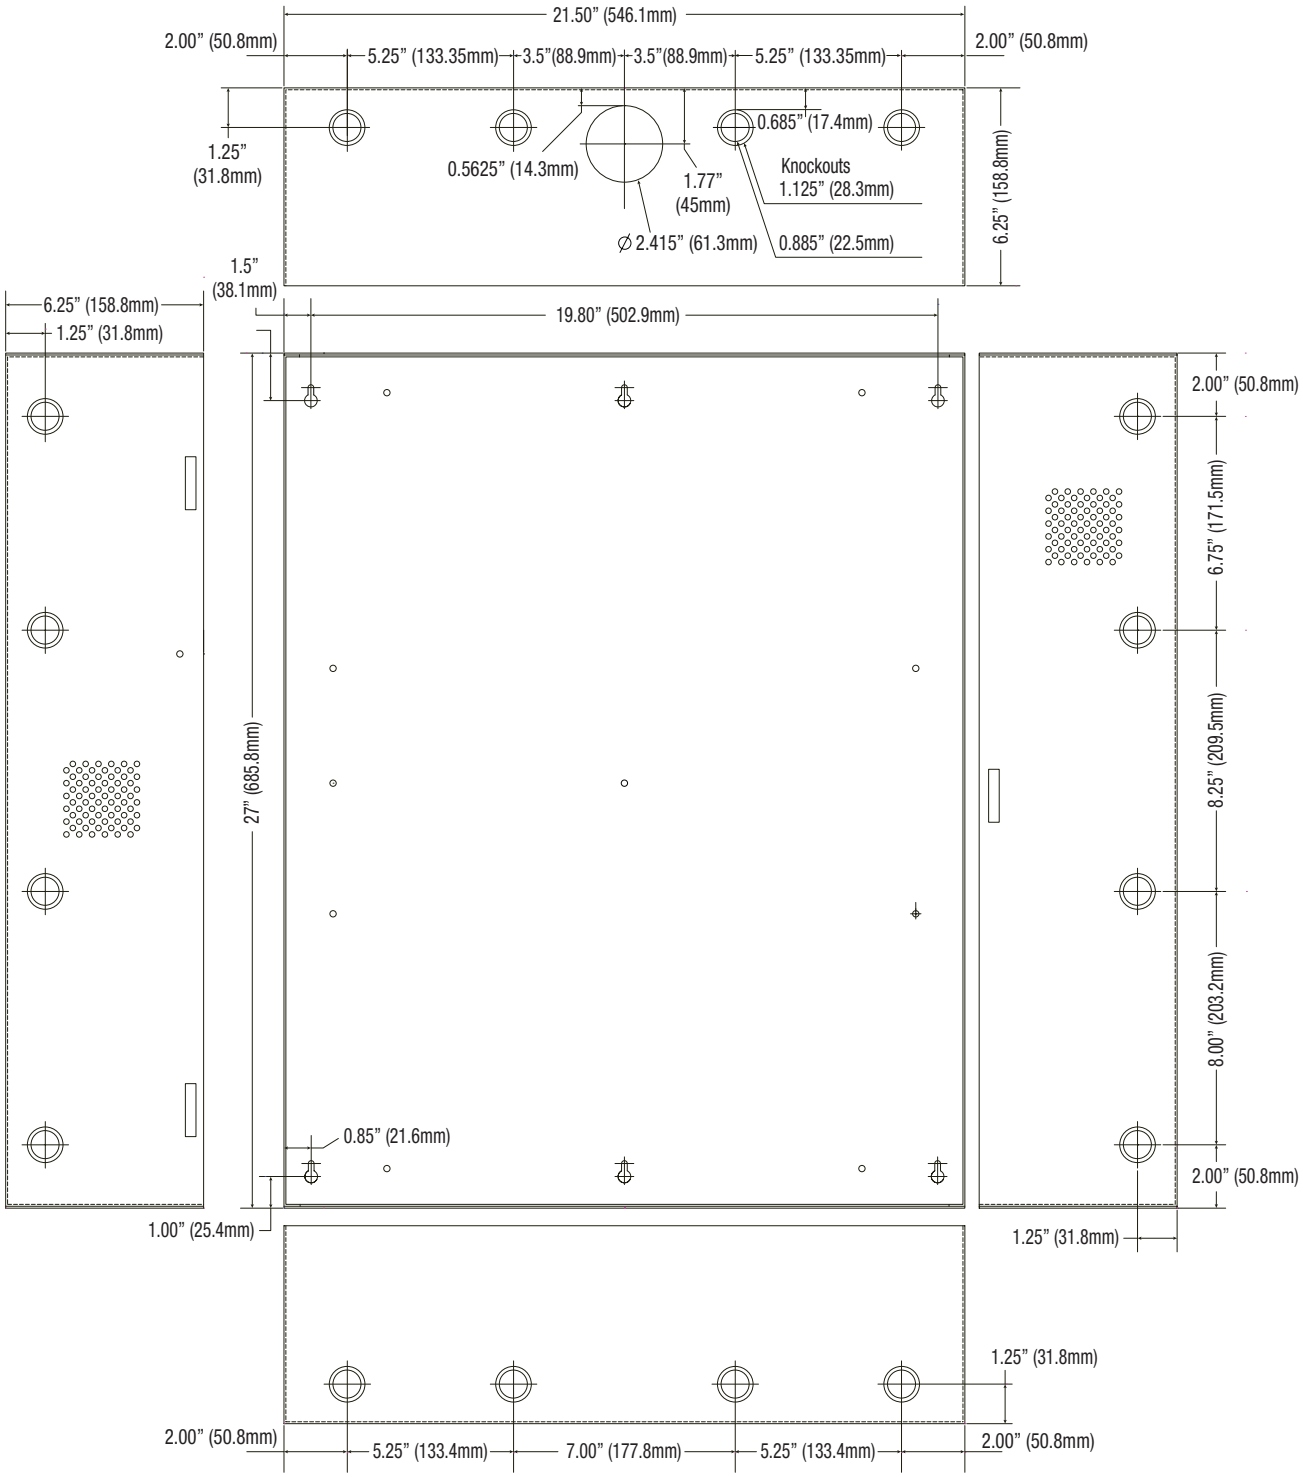

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA
phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com