

T2M5PCK1 (Pre-wired Kit)

Access and Power Integration Solution for Mercury



Altronix T2M5PCK1 is an 8-door access and power integration kit which includes Altronix power and sub-assemblies along with factory installed wire management and wire assemblies that are pre-configured with terminal blocks for Mercury* hardware. This unit provides ample power and dual voltage outputs to support Mercury platform controllers and locking devices. The T2M5PCK1 accommodates one (1) Intelligent Dual Reader Controller and three (3) Dual Reader Interface Modules. Trove Plus simplifies field installations and provides reliable, robust critical power and control for the most demanding applications.

***Also compatible with these authentic Mercury partners:**

AccessNsite, Avigilon, BadgePass, BluBox, Feenics, Genetec, Identocard, IMRON, Johnson Controls, Kastle, Keri Systems, LockState, Maxxess, Midpoint Security, NLSS, Open Options, Panasonic i-PRO MonitorCast, Quintron, RS2, S2 Security, Schneider Electric, Vanderbilt



T2M5PCK1 - includes eFlow102NB, PDS8, wire harnesses and wire magnets

Mercury modules are sold separately

Key Features

- Accommodates the following Mercury controllers:
 - 1 - LP1502 / LP4502 and 3 - MR52
- Convenient knockout configuration:
 - One (1) single knockout - 2" Conduit
 - Sixteen (16) double knockouts - 1/2" Conduit and 3/4" Conduit
- Unit includes:
 - Removable backplane
 - Wire management
 - Custom wire assemblies for power distribution with terminal blocks for controller connections
- 16 gauge galvanized steel backplane simplifies board layout and wire management
- Supervision
 - AC Fail
 - Battery Fail and Battery Presence
 - Low power shutdown
- Agency Listings:
 - All Altronix components of this Trove kit are UL Listed sub-assemblies. Please refer to the Sub-Assembly Installation Guides for further information
 - UL: UL294 - Access Control System
 - cUL: CAN/ULC - s319-05 - Electronic Access Control Systems
 - CE European Conformity
- Enclosure accommodates up to four (4) 12VDC/12AH batteries
- Lifetime Warranty*

**Altronix Power Supply/Chargers and Sub-Assemblies only*

Specifications

Power Supply/Charger (eFlow102NB):

Input

Voltage 120VAC, 60Hz, 3.5A
 Input Fuse 5A/250V

Output

Voltage 12VDC @ 10A
 Auxiliary 1A (unswitched).
 Protection Overvoltage protection. Filtered and regulated

Battery Charging

Capacity 12VDC/12AH (4 within enclosure)
 40AH/65AH (requires separate enclosure)
 Type Sealed lead acid or gel type
 Failover Upon AC loss, instantaneous
 Batteries are sold separately

Fire Alarm Disconnect

Supervised Latching or non-latching
 EOL 10K Resistor

Supervision

AC Failure Form "C" contacts
 Battery Form "C" contacts

Low DC Power Shutdown

Shuts down DC output terminals if battery voltage drops below 71-73% for 12V units. Prevents deep battery discharge

Indicators (LED)

AC Input 120VAC is present
 DC Output Powered
 Battery Discharged or not connected

Dual Input Power Distribution Module (PDS8):

Input

Voltage 12VDC from eFlow102NB
 Input Fuses 10A/32V

Outputs

Voltage 12VDC
 Any of the eight (8) power outputs are selectable to follow power Input 1 or Input 2
 Individual outputs may be set to OFF position for servicing
 Output Fuses 3A/32V

Indicators (LED)

DC Output Eight (8) individual output LEDs
 Green: 12VDC
 Red: 24VDC (if used)

T2M5PCK1 Kit:

Agency Listings

CE European Conformity

Physical and Environmental

Dimensions (H x W x D)

Enclosure: 27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)
 Shipping: 32.5" x 26.5" x 11.125" (825.5mm x 673.1mm x 282.6mm)

Weight (approx.)

Product: 41.6 lb. (18.87 kg)
 Shipping: 45.6 lb. (20.68 kg)

Temperature


Operating 0°C to 49°C (32°F to 120°F)
 Storage - 20°C to 70°C (- 4°F to 158°F)

Relative Humidity

85% +/- 5%

BTU/Hr (approx.):

91 BTU/Hr.

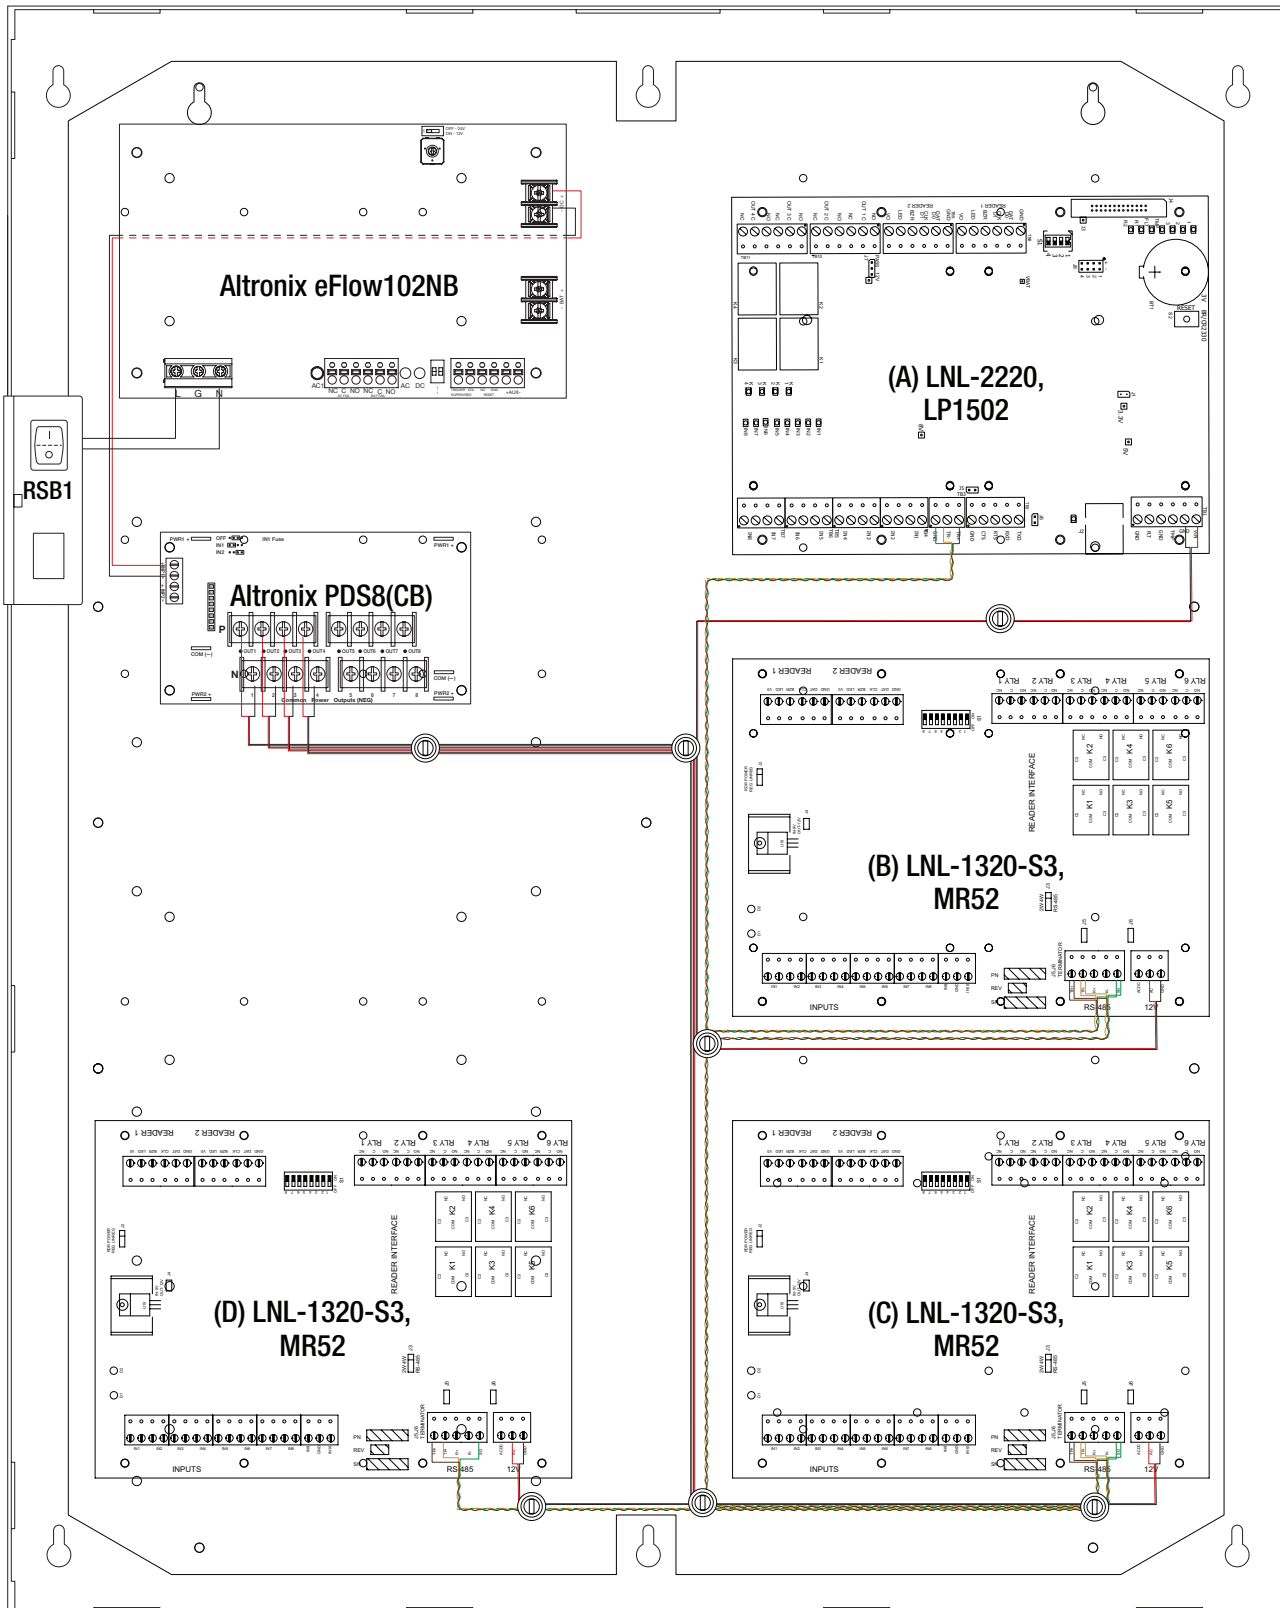

Accessories (order separately) —



LINQ2

LINQ2 - Network Supervision

Altronix LINQ2 Network Communication Module provides remote supervision, control and monitoring over LAN/WAN

- Remotely reports accurate power diagnostics
- Controls power and resets devices
- Reports system diagnostics via Email



WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.



BR1

BR1 - Sub-Assembly Mounting Bracket

Altronix BR1 mounting bracket is compatible with Altronix Maximal and Trove enclosures. It allows to mount one (1) PD4UL(CB), PD8UL(CB), ACM4(CB), MOM5, VR6, PDS8, NetWay5B or LINQ8PD(CB) sub-assembly on the enclosure's inside wall, saving valuable space.

Trove2BWC
with
batteries



Trove2BWC
with
wires



TROVE2BWC - Battery/Wire Trough Enclosure

Altronix Trove2BWC is a dual-purpose enclosure that can be used as wiring trough or battery cabinet when mounted above or below of the Trove2 integrated power and access solution. The knockouts on the Trove2BWC have been strategically placed to line up with the Trove2 allowing for easy conduit connections between cabinets. Trove2BWC includes cam locks and 2 tamper switches to ensure access to wiring and batteries is secure.

Dimensions and Drawing

Dimensions (H x W x D approximate)
 27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)

