Altronix®


Rev. 09192023

T2RM7CK1DQV (Pre-wired Kit)

Rack Mount Access and Power Integration Solution for Mercury

TROVE PLUS

Altronix T2RM7CK1DQV is a 8-door managed access and power integration kit which includes Altronix power and sub-assemblies along with factory installed wire management and wire assemblies that are pre-configured with terminal blocks for Mercury* hardware. This unit provides ample power and dual voltage outputs to support Mercury platform controllers and locking devices. The T2RM7CK1DQV accommodates one (1) Intelligent Dual Reader Controller and three (3) Dual Reader Interface Modules. Trove Plus simplifies field installations and provides reliable, robust critical power and control for the most demanding applications.

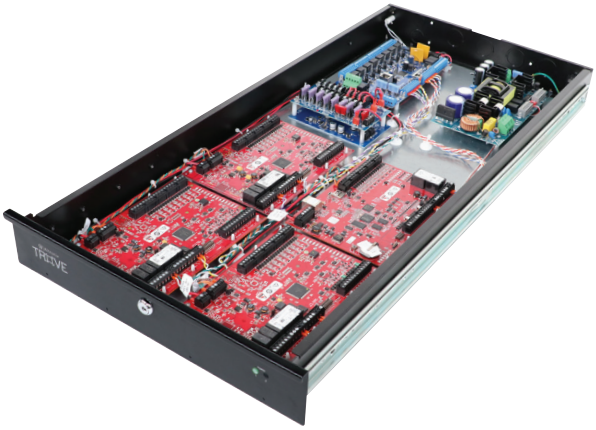

T2RM7CK1DQV - includes eFlow104RLBV, LINQ8ACMCB, VR6, PDS8CB, wire harnesses and management

Mercury boards are not included

*Also compatible with these authentic Mercury partners:
AccessNsite, Avigilon, BadgePass, BluBox, Feenics, Genetec, Identicard, IMRON, Johnson Controls, Kastle, Keri Systems, Lenel/S2, LockState, Maxxess, Midpoint Security, NLSS, Open Options, Panasonic i-PRO MonitorCast, Quintron, RS2, S2 Security, Schneider Electric, Vanderbilt

Mercury™

Key Features

- Accommodates the following Mercury controllers:
  1 - LP1502 / LP4502 and 3 - MR52
- Programmable Features:
  - Fail-safe, fail-secure or auxiliary outputs
  - Any combination of the above
  - High & low voltage & current monitoring by output
  - Battery back-up by output
  - Monitor power supply(ies) input for voltage & current limits
  - Programmable timer events, user levels
  - Enable or disable alerts by type
  - Programmable alert reporting delay
- Black powder coated steel enclosure
- Convenient knockout configuration:
  - Six (6) 1.25" diameter knockouts located on the back of enclosure
- 16 AWG galvanized steel backplane simplifies board layout and wire management
- 6' IEC320 3-wire power cord
- 2U drawer on extendable rails
- Included Z Bracket facilitates ease of wiring
- Includes cam lock, tamper switch and mounting hardware
- Supervision
  - AC Fail
  - Low Battery and Battery Presence
  - Low power shutdown
- Agency Listings:
  - CE European Conformity
- Lifetime Warranty*

**Altronix Power Supply/Chargers and Sub-Assemblies only*

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA
phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

T2RM7CK1DQV (Pre-wired Kit)

Rack Mount Access and Power Integration Solution for Mercury

Specifications

Power Supply (eFlow104RLBV):

Input

Voltage	220VAC (working range 198VAC - 256VAC), 50/60Hz, 2.7A
Input Fuse	6.3A/250V

Output

Voltage	24VDC @ 10A
Auxiliary	1A (unswitched)
Protection	Overvoltage protection. Filtered and regulated

Battery Charging

Type	Sealed lead acid or gel type
Failover	Upon AC loss, instantaneous

Batteries are sold separately

Fire Alarm Disconnect

Supervised	Latching or non-latching
EOL	10K Resistor

Supervision

AC Failure	Form "C" contacts
Battery	Form "C" contacts

Low DC Power Shutdown

Shuts down DC output terminals if battery voltage drops below 70-75% for 24V units (depending on the power supply)

Prevents deep battery discharge

Indicators (LED)

AC Input	220VAC is present
DC Output	24VDC is present
Battery	Discharged or not connected

Voltage Regulator (VR6):

Input

Voltage	24VDC from eFlow104RLBV

Output

Voltage	12VDC
Current	6A continuous
Other	Surge suppression

Indicators (LED)

Input	24VDC is present
Output	Powered

Dual Input Power Distribution Module (PDS8CB):

Input

Voltage	24VDC from eFlow104RLBV and 12VDC from VR6
Input PTCs	9A

Outputs

Voltage	12VDC and/or 24VDC

Any of the eight (8) power outputs are selectable to follow power Input 1 or Input 2

Individual outputs may be set to OFF position for servicing

Output PTCs	2.5A

Indicators (LED)

DC Output	Eight (8) individual output LEDs
Green:	12VDC
Red:	24VDC

Network Access Power Controller (LINQ8ACMCB):

Input

Voltage	24VDC from eFlow104RLBV and 12VDC from VR6
Input PTCs	9A

Outputs

PTC protected outputs

Any of the eight (8) PTC protected power outputs are selectable to follow power Input 1 or Input 2

Individual outputs may be set to OFF position for servicing

Output PTCs:	2.5A

Programming Features:

Eight (8) Programmable Outputs:

- Fail-safe, fail-secure or auxiliary outputs
- Input controlled or manually controlled through software
- High (over) and low (under) voltage and current monitoring by output
- Multiple outputs may be programmed to be triggered by a single input
- Battery back-up by output

Eight (8) Programmable Trigger Inputs:

- Normally open (NO), Normally closed (NC) or Open collector sink inputs
- Wet Input (5VDC - 24VDC) with 10k resistor
- Any combination of the above

Other Programmable Trigger Inputs:

- Monitor power supply(ies) input for voltage and current limits (high/low)
- Input and output current calibration, Programmable timer events
- Programmable user levels, Enable or disable alerts by type
- Programmable alert reporting delay

Indicators (LED)

Green AC LED:	indicates AC trouble condition
Green BAT LED:	indicates battery trouble condition
Green FACP LED:	indicates FACP disconnect is triggered
Flashing Blue Heartbeat LED:	indicates network connection
Individual OUT1 - OUT8 Red LEDs:	indicate outputs are triggered
Individual Voltage LEDs:	indicate 12VDC (Green) or 24VDC (Red)

T2RM7CK1DQV Kit:

Agency Listings

CE	European Conformity.

Physical and Environmental:

Dimensions (H x W x D):

Modular 2U standard EIA 19" rack mount chassis

Enclosure: 3.25" x 19.0" x 33.25" (82.6mm x 482.6mm x 844.6mm)

Shipping: 7.75" x 22.5" x 42.0" (196.9mm x 571.5mm x 1,066.8mm)

Weights (approx.):

Product:	40.5 lb. (18.37 kg)
Shipping:	45.5 lb. (20.64 kg)

Temperature:

Operating	0ºC to 49ºC (32ºF to 120ºF)
Storage	– 20ºC to 70ºC (– 4ºF to 158ºF)
Relative Humidity	85% +/– 5%
BTU/Hr.:	123 BTU/Hr.

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA


phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

Altronix®

T2RM7CK1DQV (Pre-wired Kit)

Rack Mount Access and Power Integration Solution for Mercury

TROVE PLUS

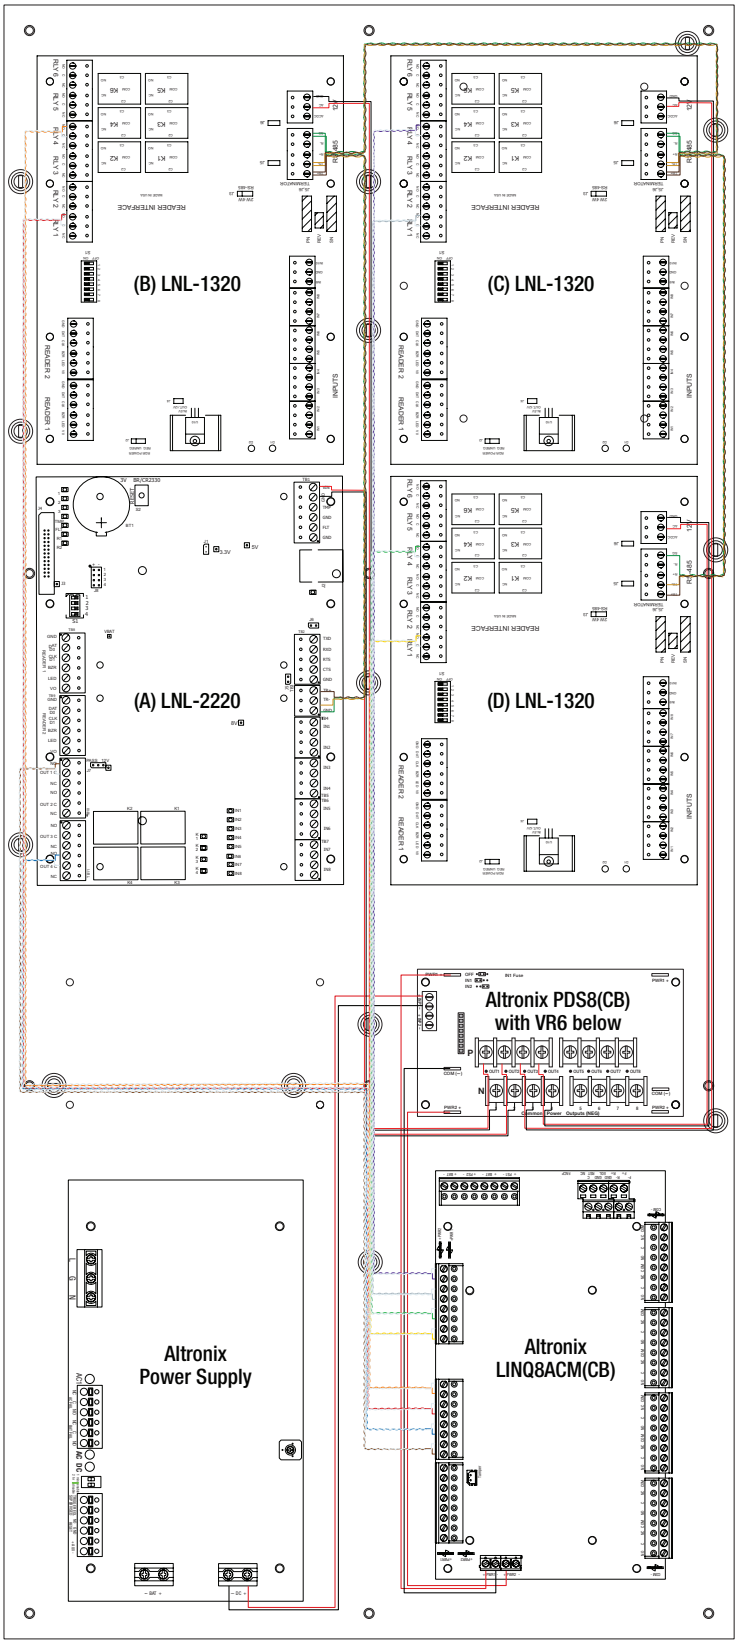

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA
phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

T2RM7CK1DQV (Pre-wired Kit)

Rack Mount Access and Power Integration Solution for Mercury

Accessories (order separately)



RE2

RE2 - Rack Mount Battery Enclosure

accommodates up to four (4) 12VDC/7AH batteries



WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps.
These are ideal for wire management in our Trove series.



Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA
phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com


T2RM7CK1DQV (Pre-wired Kit)

Rack Mount Access and Power Integration Solution for Mercury

Dimensions and Drawing

Dimensions (H x W x D approximate)

3.25” x 19.0” x 33.25” (82.6mm x 482.6mm x 844.6mm)

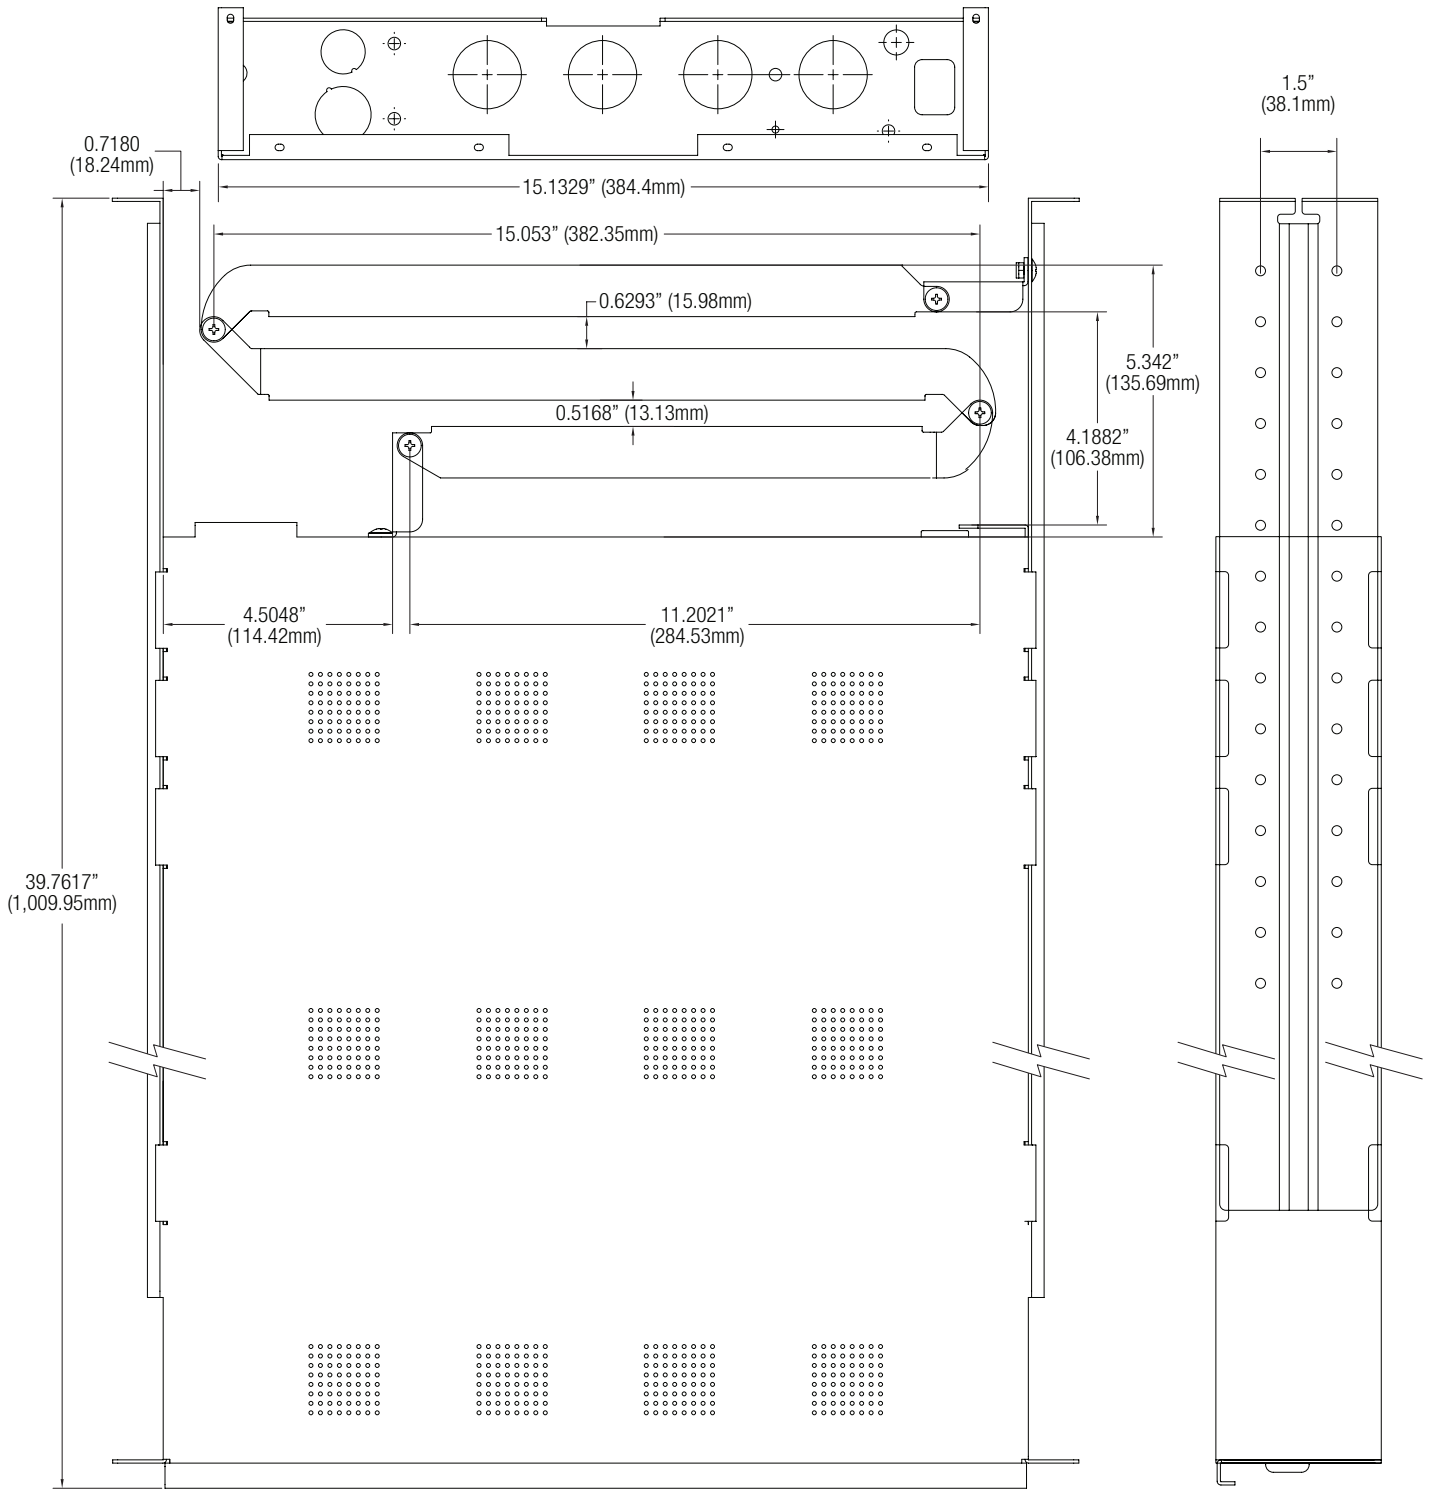

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA
phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com