

## T3M77XK2Q2 (Pre-wired Kit)

Access and Power Integration Solution for Mercury



Altronix T3M77XK2Q2 is a 16-door access and power integration kit which includes Altronix power and sub-assemblies along with factory installed wire management and wire assemblies that are pre-configured with terminal blocks for Mercury hardware. This unit provides ample power and dual voltage outputs to support Mercury platform controllers and locking devices. The T3M77XK2Q2 accommodates one (1) Intelligent Controller and seven (7) Dual Reader Interface Modules. Trove Plus simplifies field installations and provides reliable, robust critical power and control for the most demanding applications.

### \*Also compatible with these authentic Mercury partners:

AccessNsite, Avigilon, BadgePass, BluBox, Feenics, Genetec, Identicon, IMRON, Johnson Controls, Kastle, Keri Systems, LockState, Maxxess, Midpoint Security, NLSS, Open Options, Panasonic i-PRO MonitorCast, Quintrion, RS2, S2 Security, Schneider Electric, Vanderbilt



T3M77XK2Q2 - includes  
(2) eFlow104NB, LINQ2, (2) ACMS8, (2) VR6,  
(2) PDS8, wire harnesses and finger duct

*Mercury boards are not included*

### Key Features

- Accommodates the following Mercury controllers:
  - 1 - LP2500 and 7 - MR52
- Convenient knockout configuration:
  - One (1) single knockout 2.415" (2" Conduit)
  - Two (2) double knockouts 1.948" (1.5" Conduit) / 1.701" (1.25" Conduit)
  - Thirteen (13) double knockouts 1.362" (1" Conduit) / 1.115" (3/4" Conduit)
- Unit includes:
  - Removable backplane
  - 2" high finger duct for wire management
  - Custom wire assemblies for power distribution with terminal blocks for controller connections
- Management interface for up to two (2) eFlow power supplychargers
- Supervision
  - AC Fail
  - Low Battery and Battery Presence
  - Low power shutdown
- Agency Listings:
  - All Altronix components of this Trove kit are UL Listed sub-assemblies. Please refer to the Sub-Assembly Installation Guides for further information
  - UL: UL294 - Access Control System
  - cUL: CAN/ULC - s319-05 - Electronic Access Control Systems
  - CE European Conformity
- 16 gauge galvanized steel backplane simplifies board layout and wire management
- Enclosure accommodates up to four (4) 12VDC/12AH batteries
- Lifetime Warranty\*

*\*Altronix Power Supply/Chargers and Sub-Assemblies only*

## Specifications

### Two (2) Power Supplies (eFlow104NB):

#### Input

|            |                      |
|------------|----------------------|
| Voltage    | 120VAC, 60Hz, 9A max |
| Input Fuse | 6.3A/250V            |

#### Output

|            |                                                |
|------------|------------------------------------------------|
| Voltage    | 24VDC @ 10A                                    |
| Auxiliary  | 1A (unswitched)                                |
| Protection | Overvoltage protection. Filtered and regulated |

### Battery Charging

|                               |                                                                            |
|-------------------------------|----------------------------------------------------------------------------|
| Capacity                      | 12VDC/12AH (4 within enclosure)<br>40AH/65AH (requires separate enclosure) |
| Type                          | Sealed lead acid or gel type                                               |
| Failover                      | Upon AC loss, instantaneous                                                |
| Batteries are sold separately |                                                                            |

### Fire Alarm Disconnect

|            |                          |
|------------|--------------------------|
| Supervised | Latching or non-latching |
| EOL        | 10K Resistor             |

### Supervision

|            |                   |
|------------|-------------------|
| AC Failure | Form "C" contacts |
| Battery    | Form "C" contacts |

### Low DC Power Shutdown

Shuts down DC output terminals if battery voltage drops below 70-75% for 24V units (depending on the power supply)  
Prevents deep battery discharge

### Indicators (LED)

|           |                             |
|-----------|-----------------------------|
| AC Input  | 120VAC is present           |
| DC Output | 24VDC is present            |
| Battery   | Discharged or not connected |

### Network Communication Module (LINQ2):

#### Status Monitoring

AC status; Output current draw; Unit's temperature;  
DC output voltage; Low Battery/Battery presence detection  
Input trigger state change; Output (relay and power supply) state change

#### Programming

Battery service date indication  
Programmable via USB or web browser  
Automated timed events:  
- Control output relays and power supply via flexible timing parameter

#### Reporting

Programmable dashboard notifications  
E-mail notification selectable by event  
Event log tracks history (100+ events)

### Indicators (LED)

|           |          |
|-----------|----------|
| Blue LED: | Power ON |
|-----------|----------|

### Two (2) Voltage Regulators (VR6):

#### Input

|         |                       |
|---------|-----------------------|
| Voltage | 24VDC from eFlow104NB |
|---------|-----------------------|

#### Output

|         |                   |
|---------|-------------------|
| Voltage | 12VDC             |
| Current | 6A continuous     |
| Other   | Surge suppression |

### Indicators (LED)

|        |                  |
|--------|------------------|
| Input  | 24VDC is present |
| Output | Powered          |

### Two (2) Dual Input Access Power Controllers (ACMS8):

#### Input

|             |                                          |
|-------------|------------------------------------------|
| Voltage     | 24VDC from eFlow104NB and 12VDC from VR6 |
| Input Fuses | 15A/32V                                  |

#### Outputs

Voltage 12 or 24VDC individually selectable  
Eight (8) selectable 12VDC - 24VDC independently controlled outputs or eight (8) independently controlled Form "C" relay outputs:  
a) Fail-Safe and/or Fail-Secure power outputs  
b) Form "C" Relays. 28VAC or VDC @ 2.5A Rated  
c) Auxiliary power outputs (unswitched)  
d) Any combination of the above

Any of the eight (8) fuse protected power outputs are selectable to follow power Input 1 or Input 2

Individual outputs may be set to OFF position for servicing

|              |        |
|--------------|--------|
| Output Fuses | 3A/32V |
|--------------|--------|

### Indicators (LED)

|                          |                                          |
|--------------------------|------------------------------------------|
| Red LEDs                 | Outputs are triggered (relays energized) |
| Blue LED                 | FACP disconnect is triggered             |
| Individual voltage LEDs: |                                          |
| Green:                   | 12VDC                                    |
| Red:                     | 24VDC                                    |

### Two (2) Dual Input Power Distribution Modules (PDS8):

#### Input

|             |                                          |
|-------------|------------------------------------------|
| Voltage     | 24VDC from eFlow104NB and 12VDC from VR6 |
| Input Fuses | 10A/32V                                  |

#### Outputs

Voltage 12VDC and/or 24VDC  
Any of the eight (8) power outputs are selectable to follow power Input 1 or Input 2  
Individual outputs may be set to OFF position for servicing

|              |        |
|--------------|--------|
| Output Fuses | 3A/32V |
|--------------|--------|

### Indicators (LED)

|           |                                  |
|-----------|----------------------------------|
| DC Output | Eight (8) individual output LEDs |
| Green:    | 12VDC                            |
| Red:      | 24VDC                            |

### T3M77XK2Q2 Kit:

#### Agency Listings

CE European Conformity  
All components of this Trove kit are UL Listed sub-assemblies  
Please refer to the corresponding Sub-Assembly Installation Guides for further information

#### Physical and Environmental:

##### Dimensions (H x W x D)

Enclosure: 36.12" x 30.125" x 7.06" (917.5mm x 768.1mm x 179.3mm)  
Shipping: 40.75" x 35.25" x 12" (1035.1mm x 895.4mm x 304.8mm)

##### Weight (approx.)


Product: 85.6 lb. (38.83 kg)  
Shipping: 98.8 lb. (44.82 kg)

##### Temperature

Operating 0°C to 49°C (32°F to 120°F)  
Storage - 20°C to 70°C (- 4°F to 158°F)

Relative Humidity 85% +/- 5%

BTU/Hr. (approx.): 289 BTU/Hr.

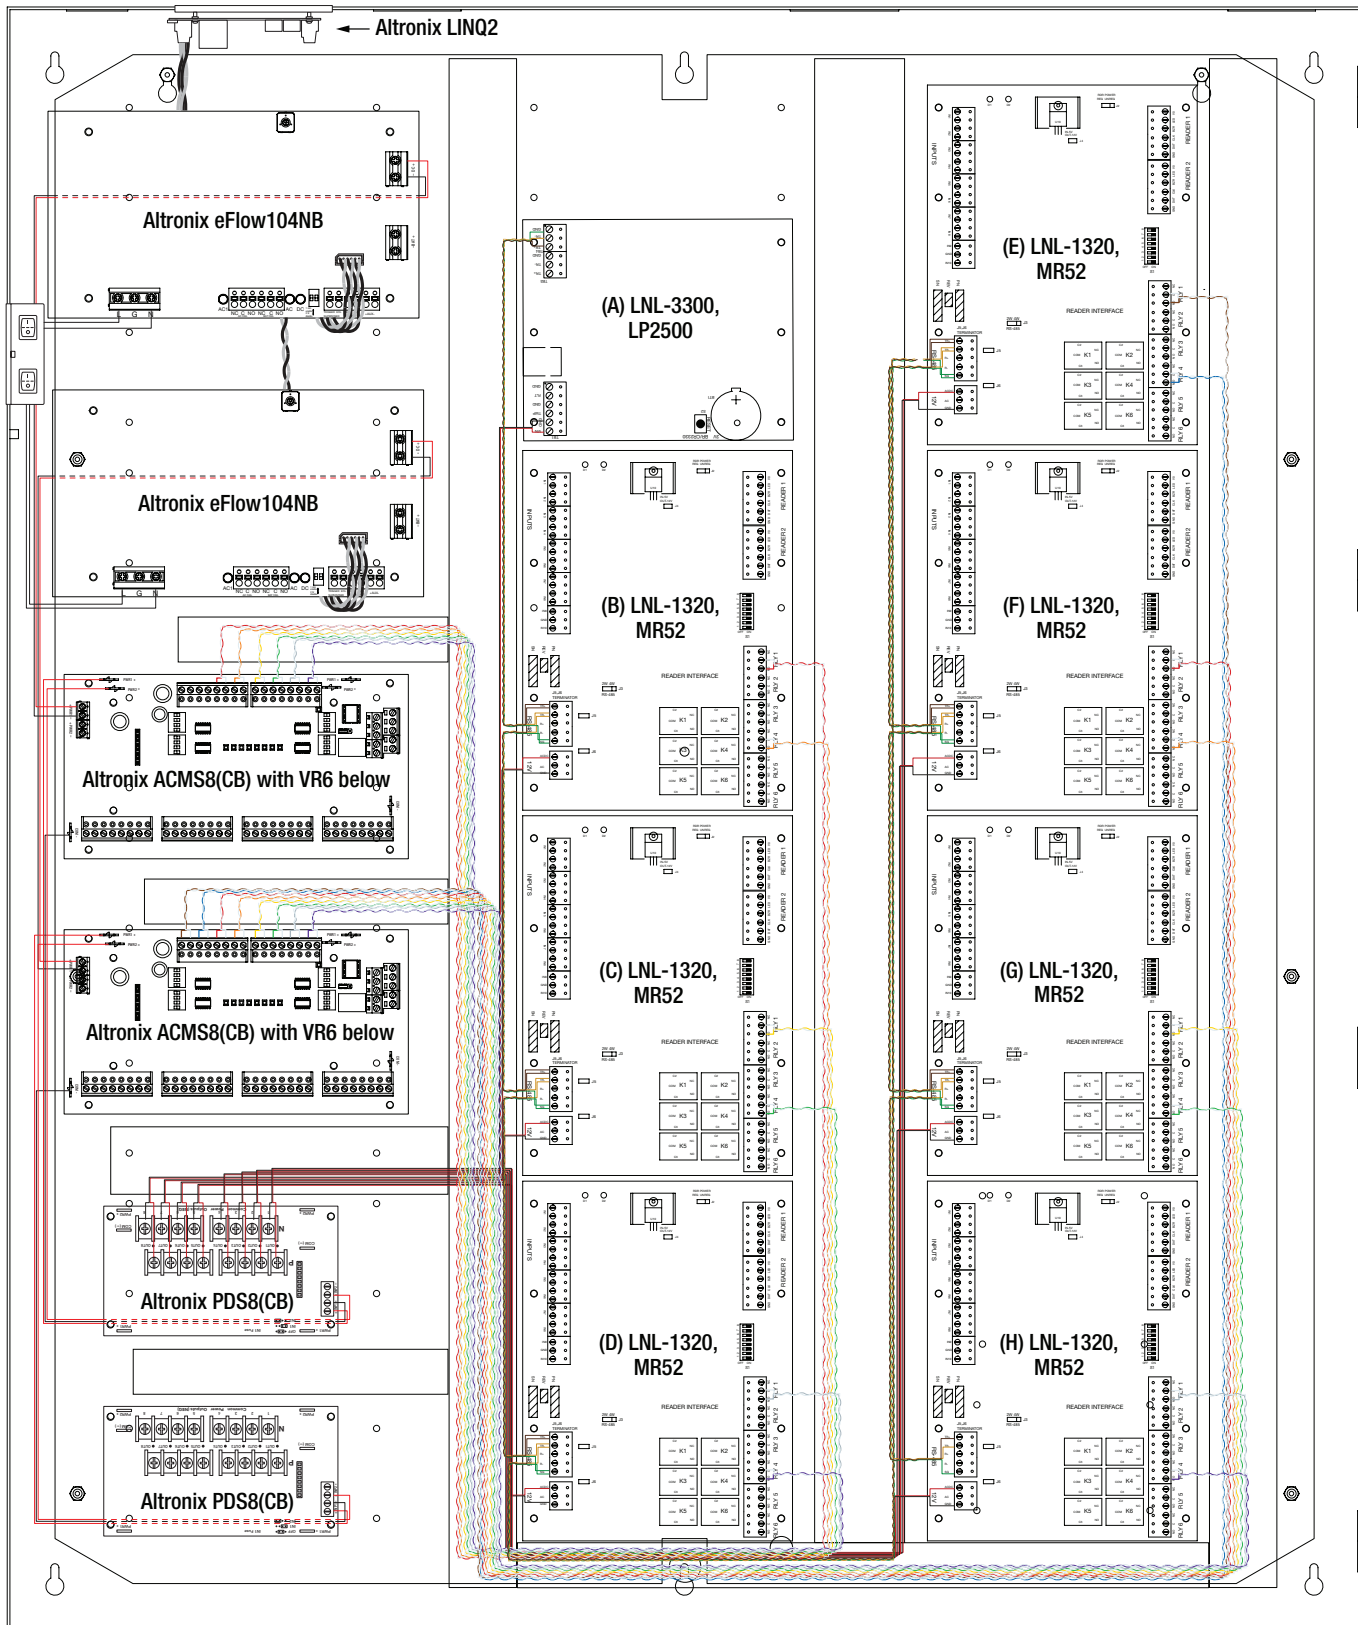

**Accessories** (order separately) —————



WM5

**WM5, WM25, WM100 - Magnetic Cable Tie Mounts**

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

**MM4, MM8, MM12, MM24 - Magnetic Mounting Solution**


Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.



BR1

**BR1 - Sub-Assembly Mounting Bracket**

Altronix BR1 mounting bracket is compatible with Altronix Maximal and Trove enclosures. It allows to mount one (1) PD4UL(CB), PD8UL(CB), ACM4(CB), MOM5, VR6, PDS8, NetWay5B or LINQ8PD(CB) sub-assembly on the enclosure's inside wall, saving valuable space.

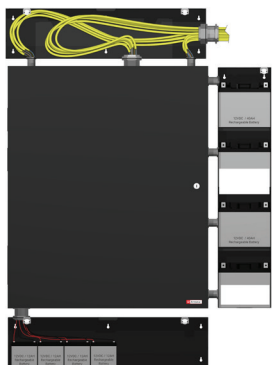

*Typical battery/wiring setup with Trove3 Enclosure (not included)*

**TROVE3BWC / TROVE3SWC - Battery/Wire Trough Enclosure**

Altronix Trove3BWC and Trove3SWC are dual-purpose enclosures that can be used as wiring troughs or battery cabinets when mounted above or below (Trove3BWC) or on either side (Trove3SWC) of the Trove integrated power and access solution. The knockouts on the Trove3BWC and Trove3SWC have been strategically placed to line up with the Trove3 allowing for easy conduit connections between cabinets. Trove3BWC and Trove3SWC include cam locks and 2 tamper switches each to ensure access to wiring and batteries is secure.

## Dimensions and Drawing

Dimensions (H x W x D approximate)

36.12" x 30.125" x 7.06" (917.5mm x 768.1mm x 179.3mm)

