Altronix®

Rev. 10152026

# T3MB755K1D (Pre-wired Kit)

## Access and Power Integration Solution for Mercury

TROVE PLUS

Altronix T3MB755K1D is a 24-door access and power integration kit which includes Altronix power and sub-assemblies along with factory installed wire management and wire assemblies that are pre-configured with terminal blocks for Mercury* hardware. This unit provides ample power and dual voltage outputs to support Mercury platform controllers and locking devices. The T3MB755K1D accommodates one (1) Intelligent Dual Reader Controller and eleven (11) Dual Reader Interface Modules. Trove Plus simplifies field installations and provides reliable, robust critical power and control for the most demanding applications.

***Also compatible with these authentic Mercury partners:**

AccessNsite, Avigilon, BadgePass, BluBox, Feenics, Genetec, Identicard, IMRON, Johnson Controls, Kastle, Keri Systems, Lenel/S2, LockState, Maxxess, Midpoint Security, NLSS, Open Options, Panasonic i-PRO MonitorCast, Quintron, RS2, S2 Security, Schneider Electric, Vanderbilt

Mercury



T3MB755K1D - includes (1) eFlow104NB, (2) eFlow102NB, (2) ACMS12CB, (2) PDS16CB, wire harnesses and management

*Mercury boards are not included*

## Key Features

- Accommodates the following Mercury controllers: 1 - LP1502 / LP4502 and 11 - MR52
- Convenient knockout configuration:
  - One (1) single knockout 2.415" (2" Conduit)
  - Two (2) double knockouts 1.948" (1.5" Conduit) / 1.701" (1.25" Conduit)
  - Thirteen (13) double knockouts 1.362" (1" Conduit) / 1.115" (3/4" Conduit)
- Unit includes:
  - Removable backplane with mounting brackets
  - Wire management
  - Custom Wire Harnesses for power distribution and controller connections
- AC input and DC output LED indicators
- Supervision
  - AC Fail
  - Low Battery and Battery Presence
  - Low power shutdown
- Built-in charger for sealed lead acid or gel type batteries
- Instantaneous transfer to stand-by batteries
- 16 gauge galvanized steel backplane simplifies board layout and wire management
- CE European Conformity
- Lifetime Warranty

**Altronix Power Supply/Chargers and Sub-Assemblies only*

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA
phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

Altronix®

# T3MB755K1D (Pre-wired Kit)

Access and Power Integration Solution for Mercury

TROVE PLUS

## Specifications

### Power Supply/Charger 1 (eFlow104NB):

**Input**

| | |
|---|---|
| Voltage | 120VAC, 60Hz, 4.5A |
| Input Fuse | 6.3A/250V |

**Output**

| | |
|---|---|
| Voltage | 24VDC @ 10A. |
| Auxiliary | 1A (unswitched) |
| Protection | Overvoltage protection. Filtered and regulated |

### Power Supply/Chargers 2 and 3 (eFlow102NB):

**Input**

| | |
|---|---|
| Voltage | 120VAC, 60Hz, 3.5A |
| Input Fuse | 5A/250V |

**Output**

| | |
|---|---|
| Voltage | 12VDC @ 10A |
| Auxiliary | 1A (unswitched) |
| Protection | Overvoltage protection. Filtered and regulated |

### Both Power Supplies:

**Battery Charging**

| | |
|---|---|
| Capacity | Up to 40AH/65AH (requires separate enclosure) |
| Type | Sealed lead acid or gel type |
| Failover | Upon AC loss, instantaneous |

Batteries are sold separately

**Fire Alarm Disconnect**

| | |
|---|---|
| Supervised | Latching or non-latching |
| EOL | 10K Resistor |

**Supervision**

| | |
|---|---|
| AC Failure | Form "C" contacts |
| Battery | Form "C" contacts |

Low DC Power Shutdown

Shuts down DC output terminals if battery voltage drops below 71-73% for 12V units and 70-75% for 24V units (depending on the power supply). Prevents deep battery discharge

**Indicators (LED)**

| | |
|---|---|
| AC Input | 120VAC is present |
| DC Output | Powered |
| Battery | Discharged or not connected |

### Two (2) Dual Input Power Distribution Modules (PDS16CB):

**Input**

| | |
|---|---|
| Voltage | 24VDC from eFlow104NB and 12VDC from eFlow102NB |
| Input PTCs | 9A |

**Outputs**

| | |
|---|---|
| Voltage | 24VDC |

Any of the sixteen (16) power outputs are selectable to follow power Input 1 or Input 2

Individual outputs may be set to OFF position for servicing

| | |
|---|---|
| Output PTCs | 2.5A |

**Indicators (LED)**

| | |
|---|---|
| DC Output | Sixteen (16) individual output LEDs |
| Green: | 12VDC |
| Red: | 24VDC |

### Two (2) Dual Input Access Power Controllers (ACMS12CB):

**Input**

| | |
|---|---|
| Voltage | 24VDC from eFlow104NB and 12VDC from eFlow102NB |
| Input PTCs | 9A |

**Outputs**

| | |
|---|---|
| Voltage | 12 or 24VDC individually selectable |

Twelve (12) selectable 12VDC - 24VDC independently controlled outputs or twelve (12) indepently controlled Form "C" relay outputs:

a) Fail-Safe and/or Fail-Secure power outputs
b) Form "C" Relays. 28VAC or VDC @ 2.5A Rated
c) Auxiliary power outputs (unswitched)
d) Any combination of the above

Any of the twelve (12) PTC protected power outputs are selectable to follow power Input 1 or Input 2

Individual outputs may be set to OFF position for servicing

| | |
|---|---|
| Output PTCs | 2.5A |

**Indicators (LED)**

| | |
|---|---|
| Red LEDs | Outputs are triggered (relays energized) |
| Blue LED | FACP disconnect is triggered |
| Individual voltage LEDs: | |
| Green: | 12VDC |
| Red: | 24VDC |

### T3MB755K1D Kit:

**Agency Listings**

| | |
|---|---|
| CE | European Conformity |

**Physical and Environmental:**

Dimensions (H x W x D)

Enclosure:
36.12" x 30.125" x 7.06" (917.5mm x 768.1mm x 179.3mm)

Shipping:
40.75" x 35.25" x 12" (1035.1mm x 895.4mm x 304.8mm)

Weight (approx.)

| | |
|---|---|
| Product | 85.6 lb. (42.27 kg) |
| Shipping | 106.4 lb. (48.26 kg) |


Temperature

| | |
|---|---|
| Operating | 0ºC to 49ºC (32ºF to 120ºF) |
| Storage | – 20ºC to 70ºC (– 4ºF to 158ºF) |
| Relative Humidity | 85% +/– 5% |
| BTU/Hr. (approx.): | 433 BTU/Hr. |

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA
phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

# T3MB755K1D (Pre-wired Kit)

Access and Power Integration Solution for Mercury

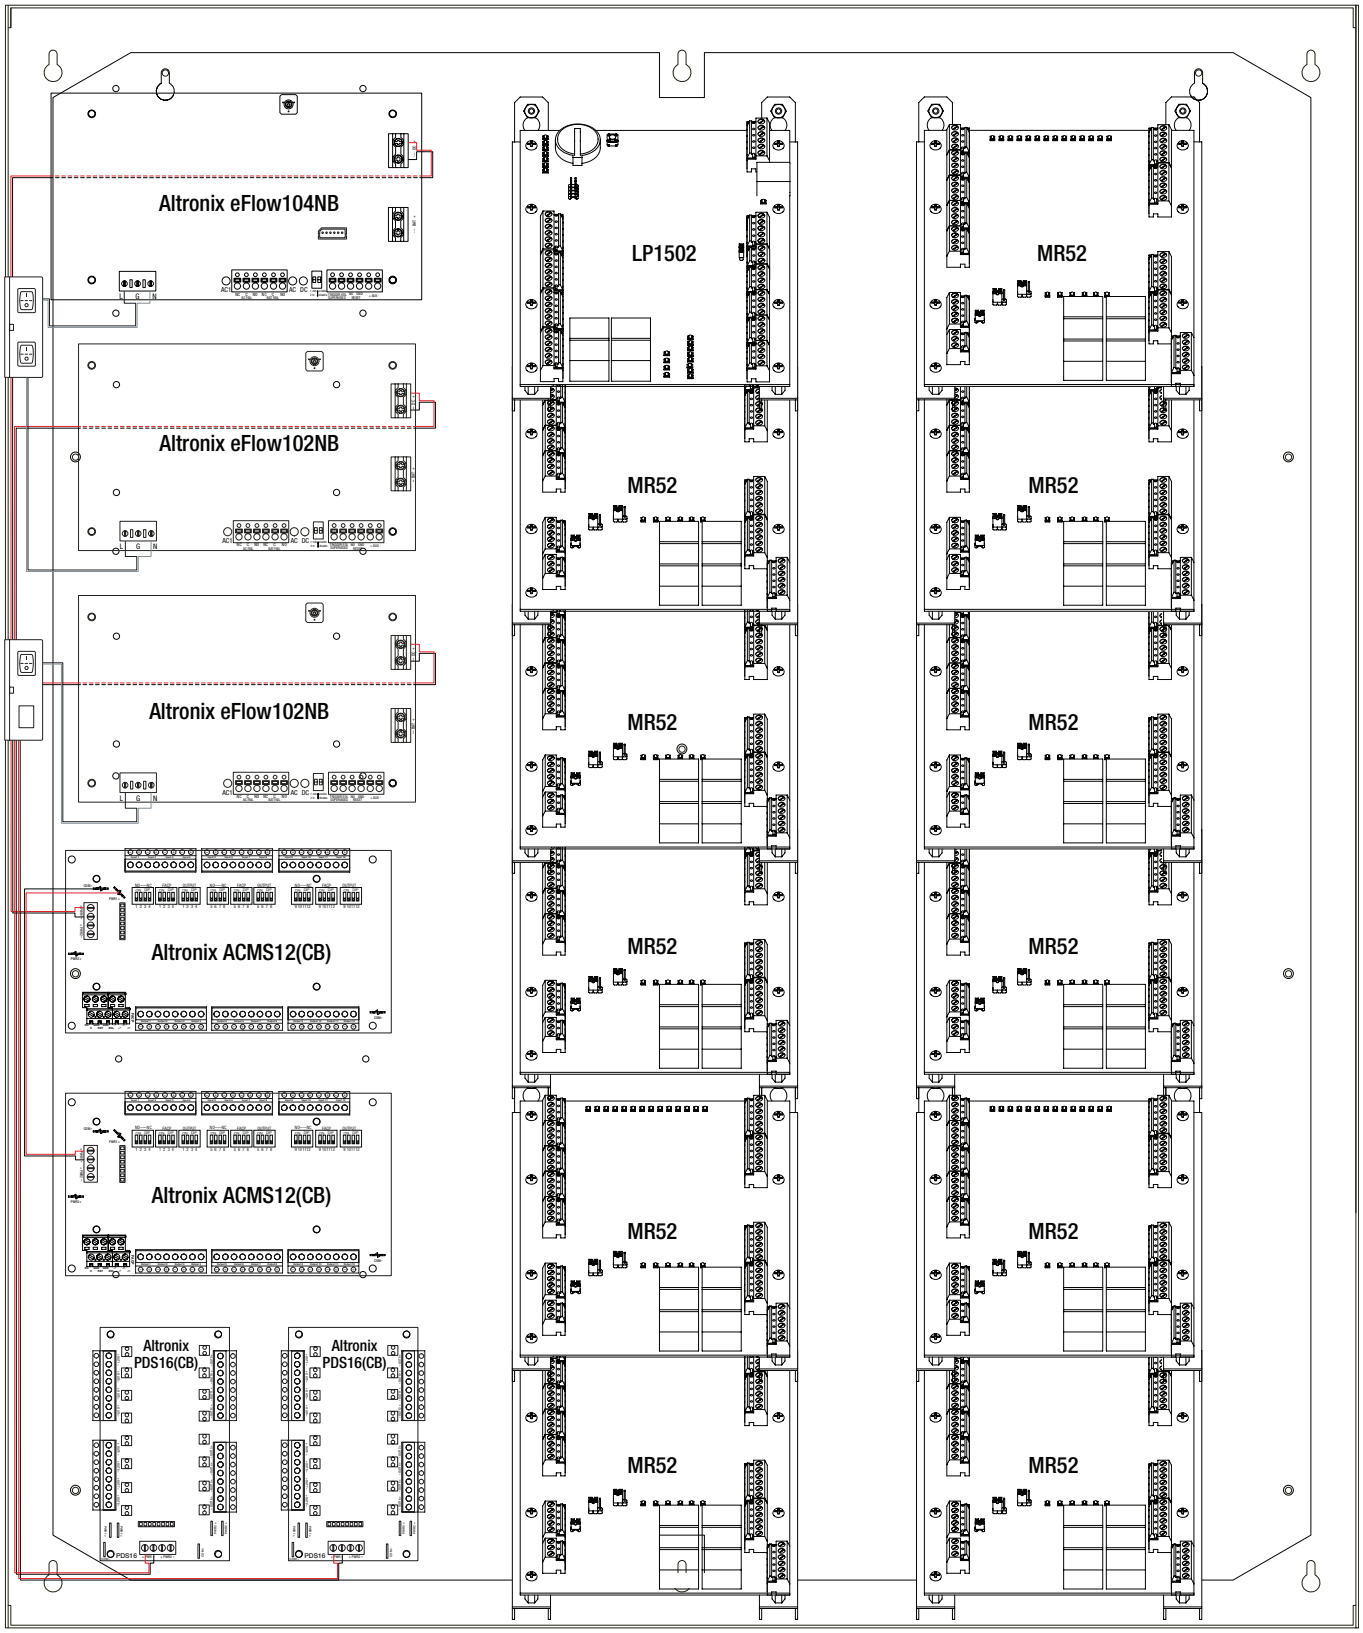


Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA
phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

# T3MB755K1D (Pre-wired Kit)

Access and Power Integration Solution for Mercury

## Accessories (order separately)



LINQ2

### LINQ2 - Network Supervision

Altronix LINQ2 Network Communication Module provides remote supervision, control and monitoring over LAN/WAN

- Remotely reports accurate power diagnostics
- Controls power and resets devices
- Reports system diagnostics via Email



WM5

### WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps.
These are ideal for wire management in our Trove series.



Mounting Magnet

### MM4, MM8, MM12, MM24 - Magnetic Mounting Solution


Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.



BR1

### BR1 - Sub-Assembly Mounting Bracket

Altronix BR1 mounting bracket is compatible with Altronix Maximal and Trove enclosures. It allows to mount one (1) PD4UL(CB), PD8UL(CB), ACM4(CB), MOM5, VR6, PDS8, NetWay5B or LINQ8PD(CB) sub-assembly on the enclosure's inside wall, saving valuable space.

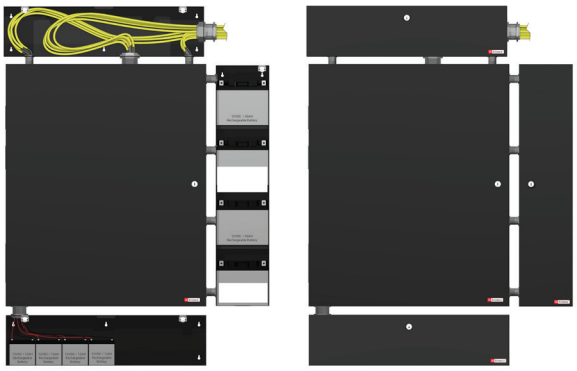

*Typical battery/wiring setup with Trove3 Enclosure (not included)*

### TROVE3BWC / TROVE3SWC - Battery/Wire Trough Enclosure

Altronix Trove3BWC and Trove3SWC are dual-purpose enclosures that can be used as wiring troughs or battery cabinets when mounted above or below (Trove3BWC) or on either side (Trove3SWC) of the Trove integrated power and access solution. The knockouts on the Trove3BWC and Trove3SWC have been strategically placed to line up with the Trove3 allowing for easy conduit connections between cabinets.Trove3BWC and Trove3SWC include cam locks and 2 tamper switches each to ensure access to wiring and batteries is secure.

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA
phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com


# T3MB755K1D (Pre-wired Kit)

Access and Power Integration Solution for Mercury

## Dimensions and Drawing

Dimensions (H x W x D approximate)

36.12” x 30.125” x 7.06” (917.5mm x 768.1mm x 179.3mm)

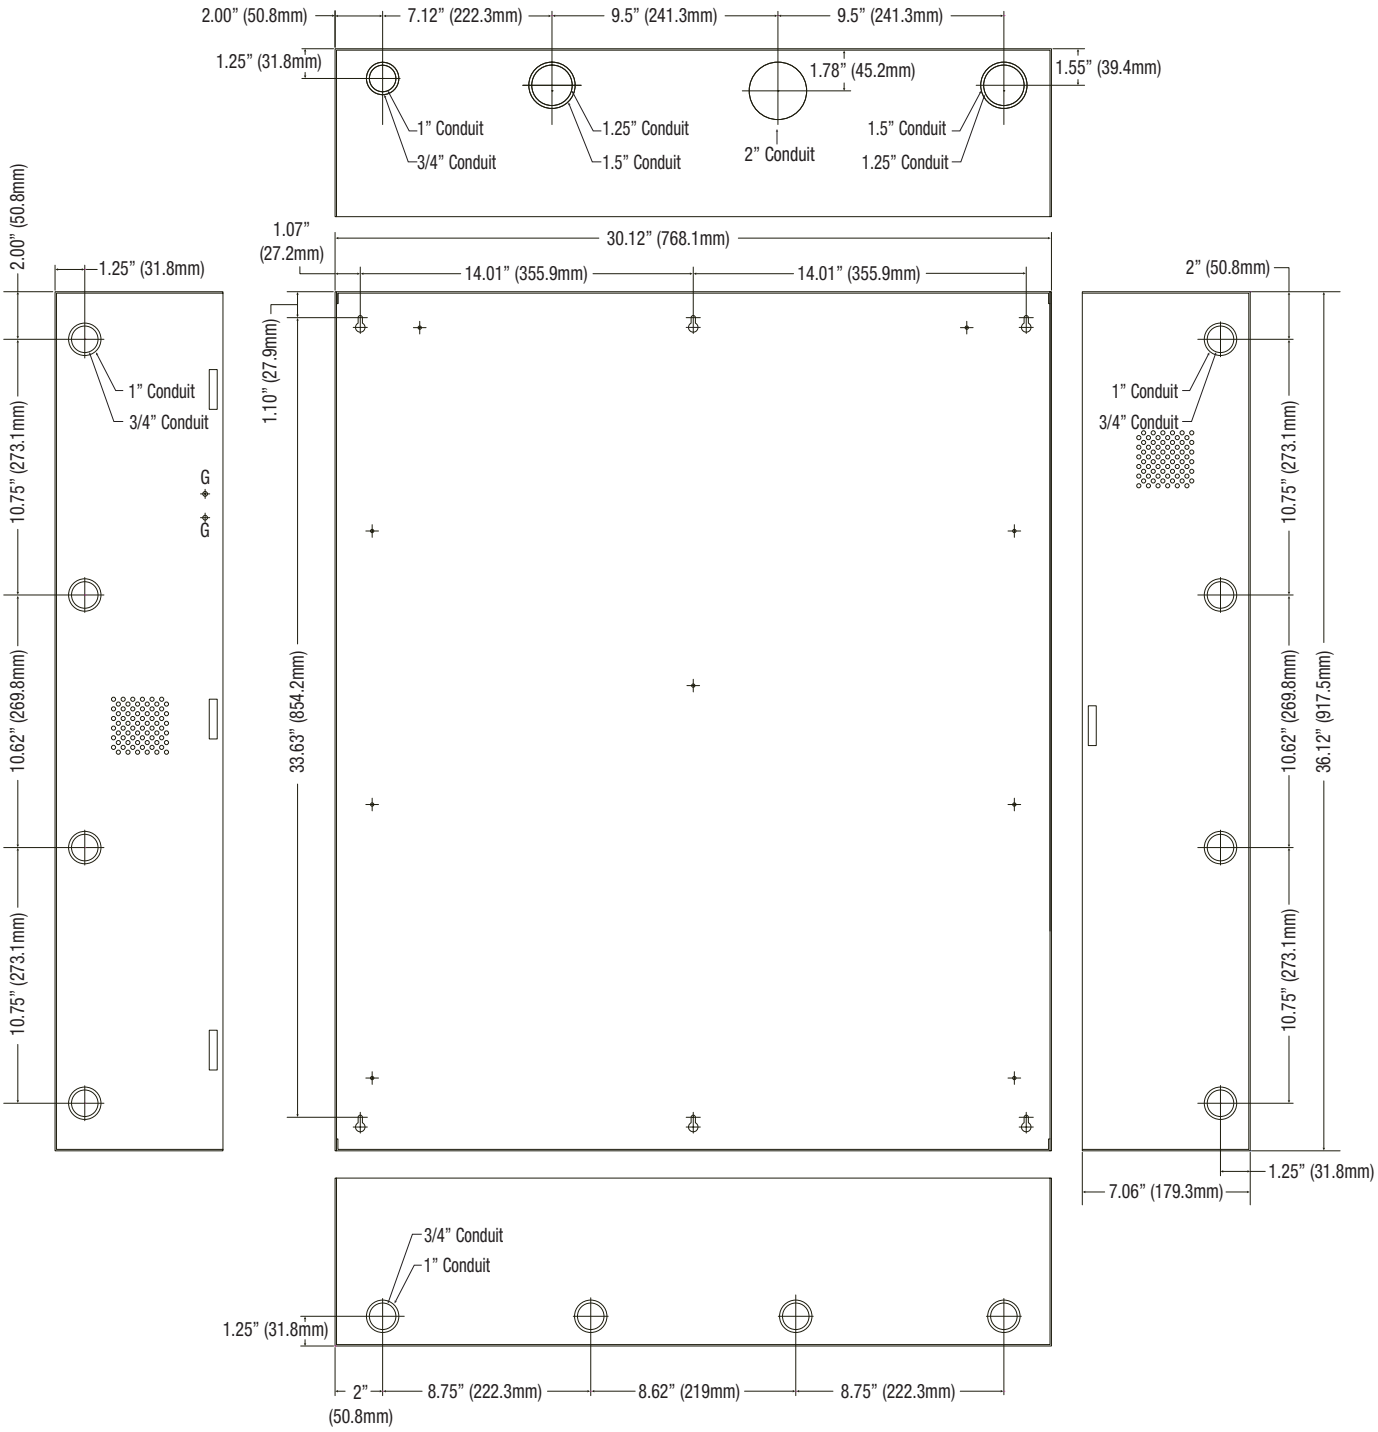



Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com