Altronix®

Rev. 10292026

T3MB777LK1 (Pre-wired Kit)

Access and Power Integration Solution for Mercury

TROVE PLUS

Altronix T3MB777LK1 is a 24-door access and power integration kit which includes Altronix power and sub-assemblies along with factory installed wire management and wire assemblies that are pre-configured with terminal blocks for Mercury* hardware. This unit provides ample power and dual voltage outputs to support Mercury platform controllers and locking devices. The T3MB777LK1 accommodates one (1) Intelligent Dual Reader Controller and eleven (11) Dual Reader Interface Modules. Trove Plus simplifies field installations and provides reliable, robust critical power and control for the most demanding applications.

*Also compatible with these authentic Mercury partners:
AccessNsite, Avigilon, BadgePass, BluBox, Feenics, Genetec, Identicard, IMRON, Johnson Controls, Kastle, Keri Systems, Lenel/S2, LockState, Maxxess, Midpoint Security, NLSS, Open Options, Panasonic i-PRO MonitorCast, Quintron, RS2, S2 Security, Schneider Electric, Vanderbilt

Mercury™



T3MB777LK1 - includes (3) AL1024ULXB2, (2) ACMS12, (2) PDS16, wire harnesses and management

Mercury boards are not included

Key Features

- Accommodates the following Mercury controllers:
  1 - LP1502 / LP4502 and 11 - MR52
- Convenient knockout configuration:
  - One (1) single knockout - 2” Conduit
  - Two (2) double knockout - 1.25” Conduit and 1.5” Conduit
  - Thirteen (13) double knockouts - 3/4” Conduit and 1” Conduit
- Unit includes:
  - Removable backplane
  - Wire management
  - Custom Wire Harnesses for power distribution and controller connections
- 16 gauge galvanized steel backplane simplifies board layout and wire management
- Supervision
  - AC Fail
  - Low Battery and Battery Presence
- CE European Conformity
- Lifetime Warranty*

**Altronix Power Supply/Chargers and Sub-Assemblies only*

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA
phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

T3MB777LK1 (Pre-wired Kit)

Access and Power Integration Solution for Mercury

Specifications

Three (3) Power Supplies (AL1024ULXB2):

Input

Voltage	115VAC 60Hz, 12.6A max.
Input Fuse	5A/250V

Outputs

Voltage	24VDC
Current	10A @ 24VDC continuous max.
Other	Overvoltage protection. Filtered and regulated

Battery Charging

Capacity	Up to 40AH/65AH (requires separate enclosure)
Type	Sealed lead acid or gel type
Failover	Upon AC loss, instantaneous

Batteries are sold separately

Supervision

AC Failure	Form "C" contacts
Battery	Form "C" contacts

Indicators (LED)

Input	115VAC is present
DC Output	Powered
Battery	Discharged or not connected

Two (2) Dual Input Power Distribution Modules (PDS16):

Input

Voltage	24VDC from AL1024ULXB2
Input Fuses	15A/32V

Outputs

Voltage	24VDC

Individual outputs may be set to OFF position for servicing

Output Fuses	3A/32V

Indicators (LED)

DC Output	Sixteen (16) individual output LEDs
Red:	24VDC

Two (2) Dual Input Access Power Controllers (ACMS12):

Input

Voltage	24VDC from AL1024ULXB2
Input Fuses	15A/32V

Outputs

Voltage	24VDC

Twelve (12) 24VDC independently controlled outputs or twelve (12) indepently controlled Form "C" relay outputs:

a) Fail-Safe and/or Fail-Secure power outputs
b) Form "C" Relays. 28VAC or VDC @ 2.5A Rated
c) Auxiliary power outputs (unswitched)
d) Any combination of the above

Individual outputs may be set to OFF position for servicing

Output Fuses	3A/32V

Indicators (LED)

Red LEDs	Outputs are triggered (relays energized)
Blue LED	FACP disconnect is triggered
Individual voltage LEDs:	
Red:	24VDC

T3MB777LK1 Kit:

Agency Listings

CE	European Conformity

Physical and Environmental:

Dimensions (H x W x D)

Enclosure:
36.12" x 30.125" x 7.06" (917.5mm x 768.1mm x 179.3mm)
Shipping:
40.75" x 35.25" x 12" (1035.1mm x 895.4mm x 304.8mm)

Weight (approx.)

Product	85.6 lb. (42.27 kg)
Shipping	106.4 lb. (48.26 kg)

Temperature


Operating	0ºC to 49ºC (32ºF to 120ºF)
Storage	– 20ºC to 70ºC (– 4ºF to 158ºF)

Relative Humidity	85% +/– 5%
BTU/Hr. (approx.):	433 BTU/Hr.

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA
phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

T3MB777LK1 (Pre-wired Kit)

Access and Power Integration Solution for Mercury

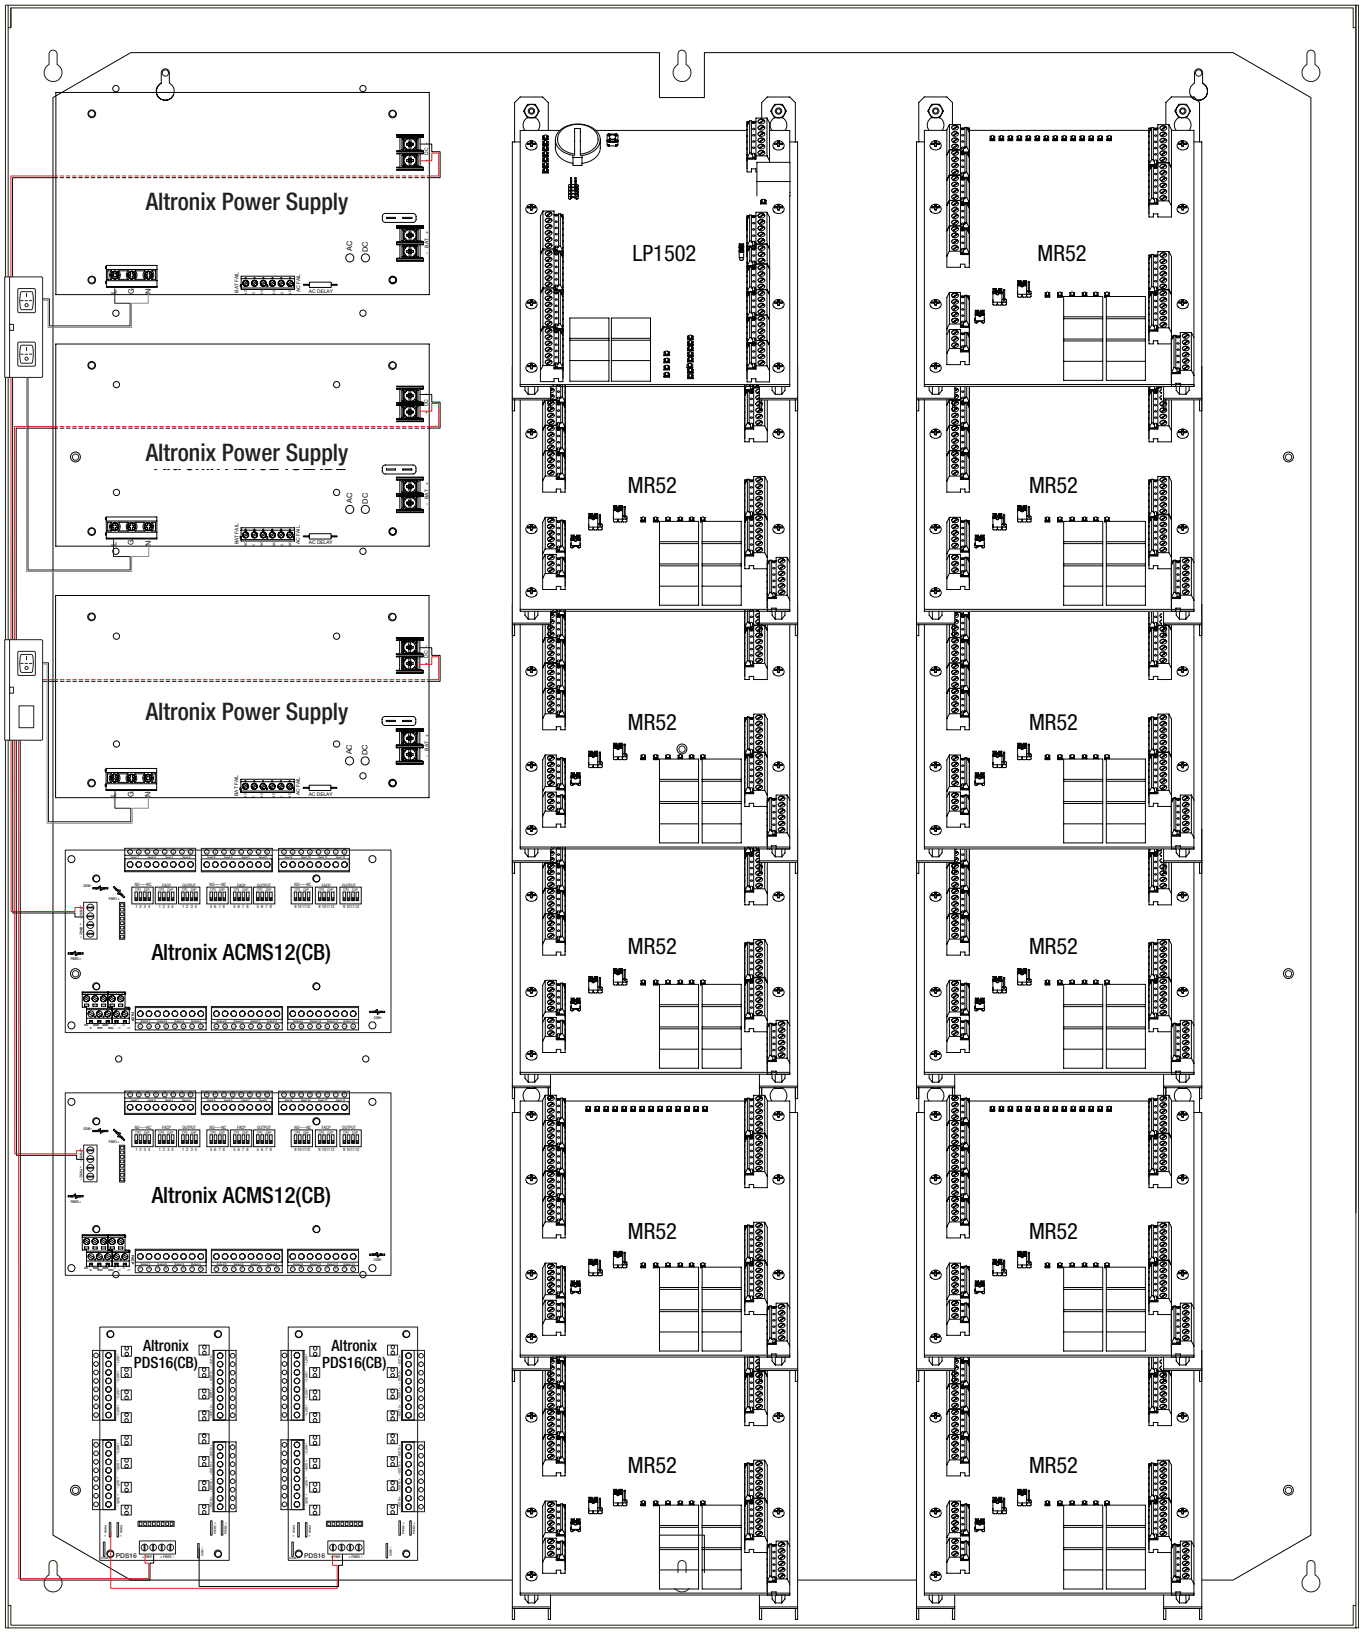

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA
phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

T3MB777LK1 (Pre-wired Kit)

Access and Power Integration Solution for Mercury

Accessories (order separately)



WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts


Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps.
These are ideal for wire management in our Trove series.



Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution


Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.



BR1

BR1 - Sub-Assembly Mounting Bracket

Altronix BR1 mounting bracket is compatible with Altronix Maximal and Trove enclosures. It allows to mount one (1) PD4UL(CB), PD8UL(CB), ACM4(CB), MOM5, VR6, PDS8, NetWay5B or LINQ8PD(CB) sub-assembly on the enclosure's inside wall, saving valuable space.

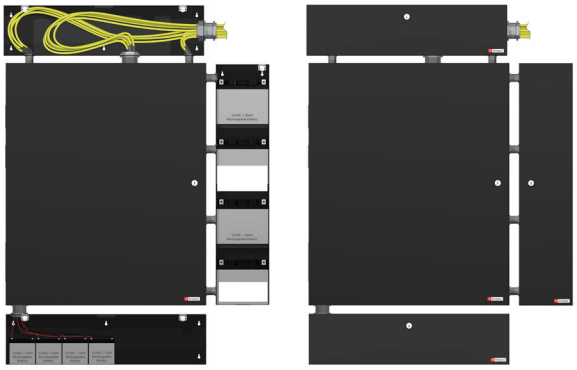

Typical battery/wiring setup with Trove3 Enclosure (not included)

TROVE3BWC / TROVE3SWC - Battery/Wire Trough Enclosure

Altronix Trove3BWC and Trove3SWC are dual-purpose enclosures that can be used as wiring troughs or battery cabinets when mounted above or below (Trove3BWC) or on either side (Trove3SWC) of the Trove integrated power and access solution. The knockouts on the Trove3BWC and Trove3SWC have been strategically placed to line up with the Trove3 allowing for easy conduit connections between cabinets.Trove3BWC and Trove3SWC include cam locks and 2 tamper switches each to ensure access to wiring and batteries is secure.

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA
phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com


T3MB777LK1 (Pre-wired Kit)

Access and Power Integration Solution for Mercury

Dimensions and Drawing

Dimensions (H x W x D approximate)

36.12” x 30.125” x 7.06” (917.5mm x 768.1mm x 179.3mm)

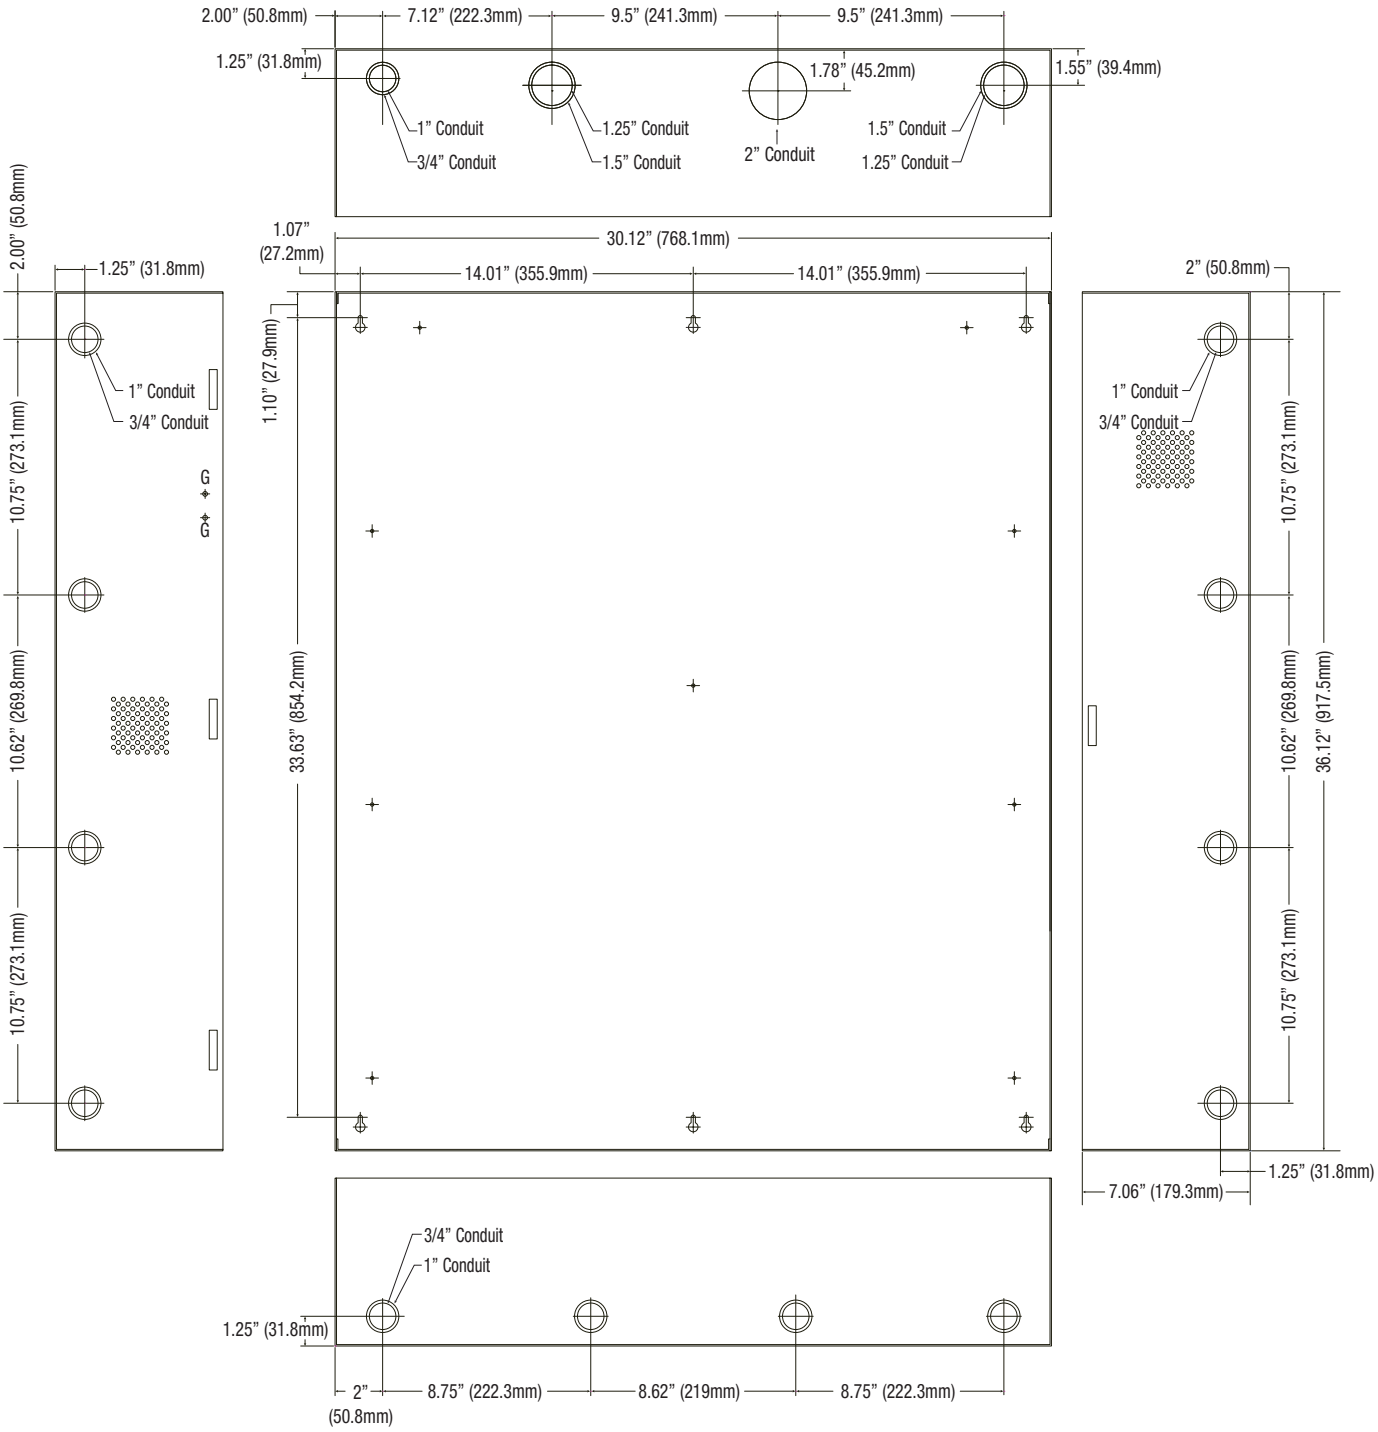

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com