

T3SSK75F28DV (Kit)

Access & Power Integration Solution for Lenel-S2

TROVE™

Altronix T3SSK75F28DV kit consists of Trove3 enclosure, TSS3 Lenel-S2 (S2 Security Platform)/Altronix backplane with one (1) 24VDC @ 10A power supply/charger, one (1) 12VDC @ 10A power supply/charger, four (4) PTC access power controllers and two (2) PTC power distribution modules.

This kit also accommodates two (2) S2-INST Installation Kits For Lenel-S2 (S2 Security Platform) S2 Network Node for up to twenty eight (28) doors in a single enclosure. Trove simplifies board layout and wire management, reduces installation time and labor costs.



T3SSK75F28DV

S2 boards are not included*Key Features**

- | | |
|---|---|
| <ul style="list-style-type: none">- 24VDC and 12VDC power supply/chargers- Accommodates two (2) S2-INST Installation Kits- Convenient knockout configuration:<ul style="list-style-type: none">- One (1) single knockout 2.415" (2" Conduit)- Two (2) double knockouts
1.948" (1.5" Conduit) / 1.701" (1.25" Conduit)- Thirteen (13) double knockouts
1.362" (1" Conduit) / 1.115" (3/4" Conduit) | <ul style="list-style-type: none">- Supervision<ul style="list-style-type: none">- AC Fail- Low Battery and Battery Presence- Low power shutdown- 16 gauge galvanized steel backplane simplifies board layout and wire management- Enclosure accommodates up to four (4) 12VDC/12AH batteries- CE European Conformity- Lifetime Warranty* |
|---|---|

**Altronix Power Supply/Chargers and Sub-Assemblies only*

Specifications

Power Supply/Charger 1 (eFlow104NBV):

Input

Voltage	220VAC (working range 198VAC - 256VAC), 50/60Hz, 2.7A
Input Fuse	6.3A/250V

Output

Voltage	24VDC @ 10A
Auxiliary	1A (unswitched)
Protection	Overvoltage protection. Filtered and regulated

Power Supply/Charger 2 (eFlow102NBV):

Input

Voltage	220VAC (working range 198VAC - 256VAC), 50/60Hz, 2.1A
Input Fuse	5A/250V

Output

Voltage	12VDC @ 10A
Auxiliary	1A (unswitched)
Protection	Overvoltage protection. Filtered and regulated

Both Power Supplies:

Battery Charging

Capacity	12VDC/12AH (4 within enclosure) 40AH/65AH (requires separate enclosure)
Type	Sealed lead acid or gel type
Failover	Upon AC loss, instantaneous
Batteries are sold separately	

Fire Alarm Disconnect

Supervised	Latching or non-latching
EOL	10K Resistor

Supervision

AC Failure	Form "C" contacts
Battery	Form "C" contacts

Low DC Power Shutdown

Shuts down DC output terminals if battery voltage drops below 71-73% for 12V units and 70-75% for 24V units (depending on the power supply). Prevents deep battery discharge

Indicators (LED)

AC Input	220VAC is present
DC Output	Powered
Battery	Discharged or not connected

Three (3) Access Power Controllers (ACM8CB):

Input

Voltage	24VDC from eFlow104NBV
Input Fuse	10A/250V

Outputs

Voltage	24VDC
Eight (8) 24VDC independently controlled PTC outputs for each ACM8CB and Four (4) 24VDC independently controlled PTC outputs for ACM4CB:	
a) Fail-Safe and/or Fail-Secure power outputs. Form "C" Relays rated 28VAC or VDC @ 2.5A	
b) Auxiliary power outputs (unswitched)	
c) Any combination of the above	

Output PTCs	2.5A
-------------	------

Indicators (LED)

Red LEDs	Outputs are triggered (relays energized)
Green LED	FACP disconnect is triggered

One (1) Access Power Controller (ACM4CB):

Input

Voltage	24VDC from eFlow104NBV
Input PTC	9A

Outputs

Voltage	24VDC
Eight (8) 24VDC independently controlled PTC outputs for each ACM8CB and Four (4) 24VDC independently controlled PTC outputs for ACM4CB:	
a) Fail-Safe and/or Fail-Secure power outputs. Form "C" Relays rated 28VAC or VDC @ 2.5A	
b) Auxiliary power outputs (unswitched)	
c) Any combination of the above	

Output PTCs	2.5A
-------------	------

Indicators (LED)

Red LEDs	Outputs are triggered (relays energized)
Green LED	FACP disconnect is triggered

Two (2) Power Distribution Modules (PD16WCB):

Input

Voltage	12VDC from eFlow102NBV
---------	------------------------

Outputs

Voltage	12VDC
Output PTCs	2.5A

Indicators (LED)

Green LED	DC Output
-----------	-----------

T3SSK75F28DV Kit:

Agency Listings

CE	European Conformity
----	---------------------

Physical and Environmental

Dimensions (H x W x D)

Enclosure:	36.12" x 30.125" x 7.06" (917.5mm x 768.1mm x 179.3mm)
Shipping:	40.75" x 35.25" x 12" (1035.1mm x 895.4mm x 304.8mm)

Weight (approx.)

Product	85.6 lb. (38.83 kg)
Shipping	98.8 lb. (44.82 kg)

Temperature

Operating	0°C to 49°C (32°F to 120°F)
Storage	- 20°C to 70°C (- 4°F to 158°F)


Relative Humidity

85% +/- 5%

BTU/Hr (approx.):

289 BTU/Hr.

Access Controller Position Chart for the S2-INST Installation Kits:

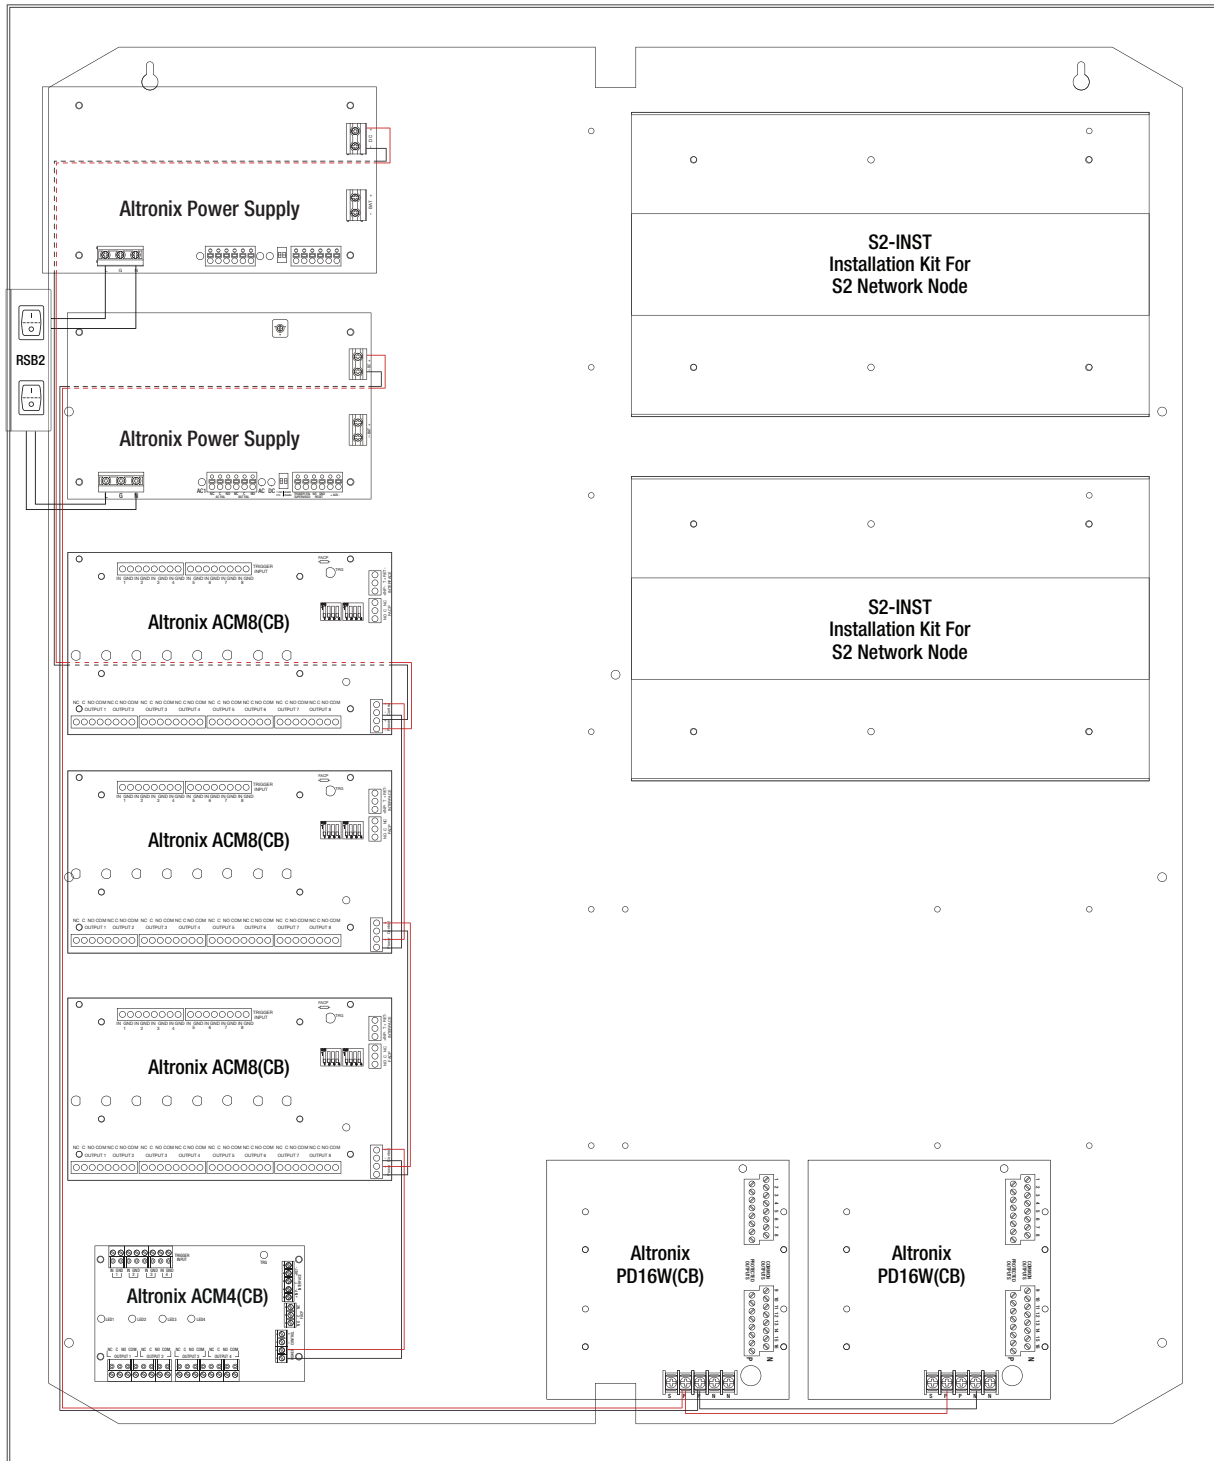

Accessories (order separately)



LINQ2

LINQ2 - Network Supervision

Altronix LINQ2 Network Communication Module provides remote supervision, control and monitoring over LAN/WAN

- Remotely reports accurate power diagnostics
- Controls power and resets devices
- Reports system diagnostics via Email



WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution


Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.



BR1

BR1 - Sub-Assembly Mounting Bracket

Altronix BR1 mounting bracket is compatible with Altronix Maximal and Trove enclosures. It allows to mount one (1) PD4UL(CB), PD8UL(CB), ACM4(CB), MOM5, VR6, PDS8, NetWay5B or LINQ8PD(CB) sub-assembly on the enclosure's inside wall, saving valuable space.

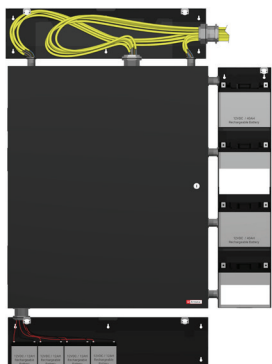

TROVE3BWC / TROVE3SWC - Battery/Wire Trough Enclosure

Altronix Trove3BWC and Trove3SWC are dual-purpose enclosures that can be used as wiring troughs or battery cabinets when mounted above or below (Trove3BWC) or on either side (Trove3SWC) of the Trove integrated power and access solution. The knockouts on the Trove3BWC and Trove3SWC have been strategically placed to line up with the Trove3 allowing for easy conduit connections between cabinets. Trove3BWC and Trove3SWC include cam locks and 2 tamper switches each to ensure access to wiring and batteries is secure.

Typical battery/wiring setup with Trove3 Enclosure (not included)

Dimensions and Drawing

Dimensions (H x W x D approximate)

36.12" x 30.125" x 7.06" (917.5mm x 768.1mm x 179.3mm)

