

TempoA2

Occupancy Alert System



Altronix TempoA2 is designed to alert management when unauthorized loitering occurs in up to (two) secure rooms. TempoA2 has built-in LINQ Technology to remotely monitor, control and report power/diagnostics.



TempoA2

Specifications

Input Power Options

| | |
|---------|---|
| AC | 24VAC/50VA Plug-in transformer |
| Trigger | Two (2) Door Sensor/Trigger inputs Two (2) Strobe "Steady" Trigger Inputs Two (2) Strobe "Flash" Trigger Inputs Two (2) "Panic/Emergency" Trigger Inputs |

Output Options:

| |
|--|
| 12VDC/2.5A, 24VDC/1.25A, (30W) Two (2) Strobe Switched Power Outputs Four (4) Aux. Power Outputs |
|--|

Timer

Alphanumeric LCD display simplifies programming.
EE Prom memory protects against loss of programming due to power failure
Momentary and/or Latching Events

Battery Charging

| | |
|-------------------------------|------------------------------|
| Type | Sealed lead acid or gel type |
| Failover | Upon AC loss, instantaneous |
| Batteries are sold separately | |

Indicators (LED)

| | |
|------------------|--------------------------|
| AC Power (Green) | Input voltage is present |
| DC Output (Red) | 12/24VDC is on |
| Trigger | Active |

LINQ Technology:

Remote network management allows for device reset and monitoring
Provides local and/or remote access to critical information via LAN/WAN
Email and Windows Dashboard Alert notifications report real-time diagnostics
Event log tracks history

Physical and Environmental

Enclosure accommodates up to two (2) 12VDC/4AH batteries
1/2" and 3/4" combination knockouts

Dimensions (H x W x D)

| | |
|------------|---|
| Enclosure: | 8.5" x 7.5" x 3.875" (215.9mm x 191mm x 98.4mm) |
| Shipping: | 13" x 10" x 7" (330.2mm x 254mm x 177.8mm) |

Weight (approx.)

| | |
|-----------|--------------------|
| Product: | 4.85 lb. (2.2 kg) |
| Shipping: | 5.45 lb. (2.47 kg) |

Temperature

| | |
|-----------|---------------------------------|
| Operating | 0°C to 49°C (32°F to 120°F). |
| Storage | - 20°C to 70°C (- 4°F to 158°F) |


| | |
|--------------------|------------|
| Relative Humidity | 85% +/- 5% |
| BTU/Hr. (approx.): | 14 BTU/Hr. |

Lifetime Warranty

Dimensions and Drawing

Dimensions (H x W x D approximate)

8.5" x 7.5" x 3.5" (215.9mm x 190.5mm x 88.9mm)

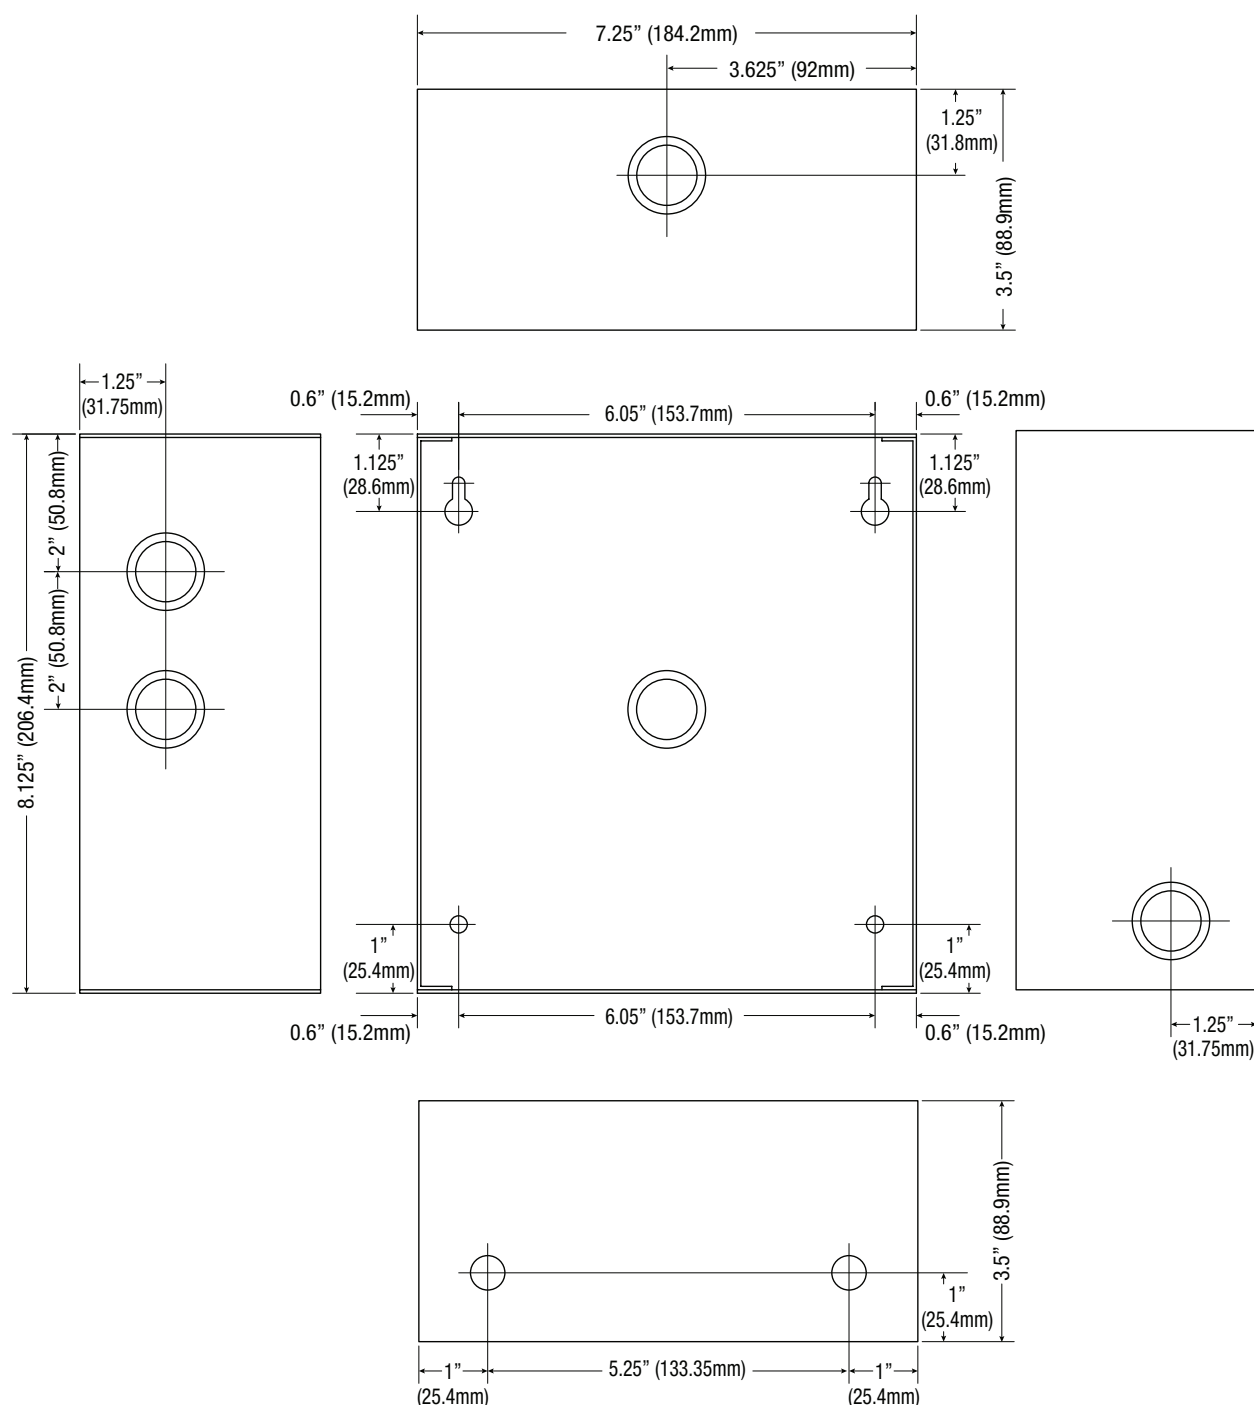

Lifetime Warranty

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com