


# TempoA2B

## Occupancy Alert System

Altronix TempoA2B is designed to alert management when unauthorized loitering occurs in up to (two) secure rooms. TempoA2B has built-in LINQ Technology to remotely monitor, control and report power/diagnostics.

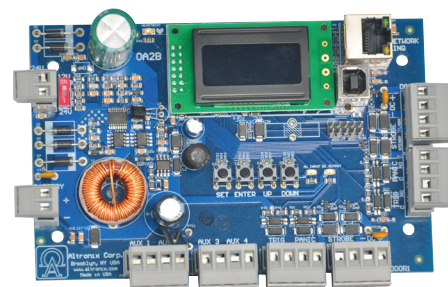

TempoA2B

### Specifications

#### Input Power Options

AC	24VAC/50VA Plug-in transformer
Trigger	Two (2) Door Sensor/Trigger inputs Two (2) Strobe "Steady" Trigger Inputs Two (2) Strobe "Flash" Trigger Inputs Two (2) "Panic/Emergency" Trigger Inputs

#### Output Options:

12VDC/2.5A, 24VDC/1.25A, (30W)
Two (2) Strobe Switched Power Outputs
Four (4) Aux. Power Outputs

#### Timer

Alphanumeric LCD display simplifies programming.  
EE Prom memory protects against loss of programming due to power failure  
Momentary and/or Latching Events

#### Battery Charging

Type	Sealed lead acid or gel type
Failover	Upon AC loss, instantaneous
Batteries are sold separately	

#### Indicators (LED)

AC Power (Green)	Input voltage is present
DC Output (Red)	12/24VDC is on
Trigger	Active

#### LINQ Technology:

Remote network management allows for device reset and monitoring  
Provides local and/or remote access to critical information via LAN/WAN  
Email and Windows Dashboard Alert notifications report real-time diagnostics  
Event log tracks history

#### Physical and Environmental

##### Dimensions (L x W x H)

Board:	6.125" x 3.875" x 1.5" (155.6mm x 98.4mm x 38.1mm)
Shipping:	10" x 8" x 4" (254mm x 203.2mm x 101.6mm)

##### Weight (approx.)

Product Weight:	0.7 lb. (0.32 kg)
Shipping Weight:	1.1 lb. (0.5 kg)

##### Temperature

Operating:	0°C to 49°C (32°F to 120°F)
Storage:	- 20°C to 70°C (- 4°F to 158°F)

Relative Humidity 85% +/- 5%

BTU/Hr (approx.) 61 BTU/Hr.

Mounting hardware is included

#### Lifetime Warranty