

TempoA2X

Occupancy Alert System



Altronix TempoA2X is designed to alert management when unauthorized loitering occurs in up to (two) secure rooms. TempoA2X has built-in LINQ Technology to remotely monitor, control and report power/diagnostics.



Specifications

Input Power Options

AC 115VAC, 60Hz, 0.5A

(with line cord and transformer)

Trigger Two (2) Door Sensor/Trigger inputs

Two (2) Strobe "Steady" Trigger Inputs
Two (2) Strobe "Flash" Trigger Inputs

Two (2) "Panic/Emergency" Trigger Inputs

Output Options:

12VDC/2.5A, 24VDC/1.25A, (30W)

Two (2) Strobe Switched Power Outputs

Four (4) Aux. Power Outputs

Timer

Alphanumeric LCD display simplifies programming.

EE Prom memory protects against loss of programming

due to power failure

Momentary and/or Latching Events

Battery Charging

Type Sealed lead acid or gel type
Failover Upon AC loss, instantaneous

Batteries are sold separately

Indicators (LED)

AC Power (Green) Input voltage is present

DC Output (Red) 12/24VDC is on

Trigger Active

LINQ Technology:

Remote network management allows for device reset

and monitoring

Provides local and/or remote access to critical information

via LAN/WAN

Email and Windows Dashboard Alert notifications report

real-time diagnostics Event log tracks history

Physical and Environmental

1/2" and 3/4" combination knockouts

Dimensions (H x W x D)

Enclosure:

8.5" x 7.5" x 3.875" (215.9mm x 191mm x 98.4mm)

Shipping:

13" x 10" x 7" (330.2mm x 254mm x 177.8mm)

Weight (approx.)

Product: 4.85 lb. (2.2 kg) Shipping: 5.45 lb. (2.47 kg)

Temperature

Operating 0°C to 49°C (32°F to 120°F). Storage -20°C to 70°C (-4°F to 158°F)

Relative Humidity 85% +/- 5% BTU/Hr. (approx.): 14 BTU/Hr.



TempoA2X


Occupancy Alert System





Dimensions and Drawing

Dimensions (H x W x D approximate)

8.5" x 7.5" x 3.5" (215.9mm x 190.5mm x 88.9mm)



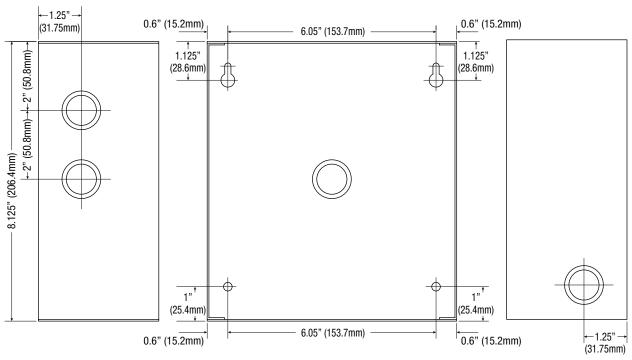



Lifetime Warranty