

Trove2XXM2

Access & Power Integration Solution for Mercury

TROVE™

Altronix Trove2XXM2 enclosure and TM2 backplane let you easily integrate Altronix power with Mercury access controllers and accessories. The enclosure has no knockouts or venting holes for use in applications such as federal and military installations. Trove simplifies board layout and wire management, reduces installation time and labor costs.

***Also compatible with these authentic Mercury partners:**

AccessNsite, Avigilon, BadgePass, BluBox, Feenics, Genetec, Identocard, IMRON, Johnson Controls, Kastle, Keri Systems, Lenel/S2, LockState, Maxxess, Midpoint Security, NLSS, Open Options, Panasonic Video Insight, Quintron, RS2



Trove2XXM2

Boards are not included

Specifications

- Accommodates the following Mercury controllers with or without Altronix power/accessories:
 - Mercury: LP1502, MR52, MR16IN, MR16OUT, LP2500, MUX8, MR51e, LP1501, MR50, and Genetec Synergis Cloud Link
- Altronix Power Supplies
- Altronix Sub-Assemblies
- Includes Altronix Trove2XX Enclosure and one (1) removable TM2 backplane

Features

- Simplifies board layout and wire management
- No knockouts or venting holes
- 16 Gauge powder coated steel
- Includes cam lock, tamper switch and mounting hardware

Capacity

- Accommodates up to four (4) 12VDC/12AH batteries

Agency Listings

CE European Conformity

Physical and Environmental

Dimensions (H x W x D):

Enclosure: 27.25" x 21.5" x 6.5" (692mm x 546mm x 165mm)

Shipping: 32.5" x 26.5" x 11.125" (826mm x 673mm x 283mm)

Weights (approx.):

Product: 37.1 lb. (16.83 kg)

Shipping: 40.85 lb. (18.53 kg)

Also Available (order separately)

TMV2 Door Backplane

- Accommodates the following Mercury controllers:
 - Mercury: LP1502, MR52, MR16IN, MR16OUT, LP2500, MUX8, and Genetec Synergis Cloud Link

Features

- Simplifies board layout and wire management
- 16 Gauge galvanized steel

Agency Listings

UL: UL294 - Access Control System

cUL: CAN/ULC - s319-05 - Electronic Access Control Systems

CE European Conformity

Physical and Environmental

Dimensions (H x W x D):

Backplane: 23.75" x 18.125" x 0.3125"
(603.3mm x 460mm x 8mm)

Shipping: 26.5" x 20.5" x 1.25"
(673mm x 521mm x 32mm)

Weights (approx.):

Product: 8.0 lb. (3.63 kg)


Shipping: 10.0 lb. (4.53 kg)

All registered trademarks are property of their respective owners.

Access Controller Position Chart for the Following Models:

Altronix / Mercury	Pem Mounting
AL400ULXB2, AL400ULXB2V, AL600ULXB, AL600XB220, AL1012ULXB, AL1012XB220, AL1024ULXB2, AL1024XB2V, eFlow4NB, eFlow4NBV, eFlow6NB, eFlow6NBV, eFlow102NB, eFlow102NBV, eFlow104NB, eFlow104NBV, Tango1B, ACM8, ACM8CB, ACMS8, ACMS8CB, ACMS12, ACMS12CB, LINQ8ACM, LINQ8ACMCB	(A)
ACM4, ACM4CB, LINQ8PD, LINQ8PDCB, MOM5, PD4UL, PD4ULCB, PD8UL, PD8ULCB, PDS8, PDS8CB, PDS16, PDS16CB, VR6, GB1 (accommodates Genetec Synergis Cloud Link)	(B)
LP2500, MUX8	(C)
LP1502, LP4502, MR52, MR16IN, MR16OUT	(D)
LP1501, MR62e	(E)
MR50	(F)

TMV2 Door Backplane (Order Separately)

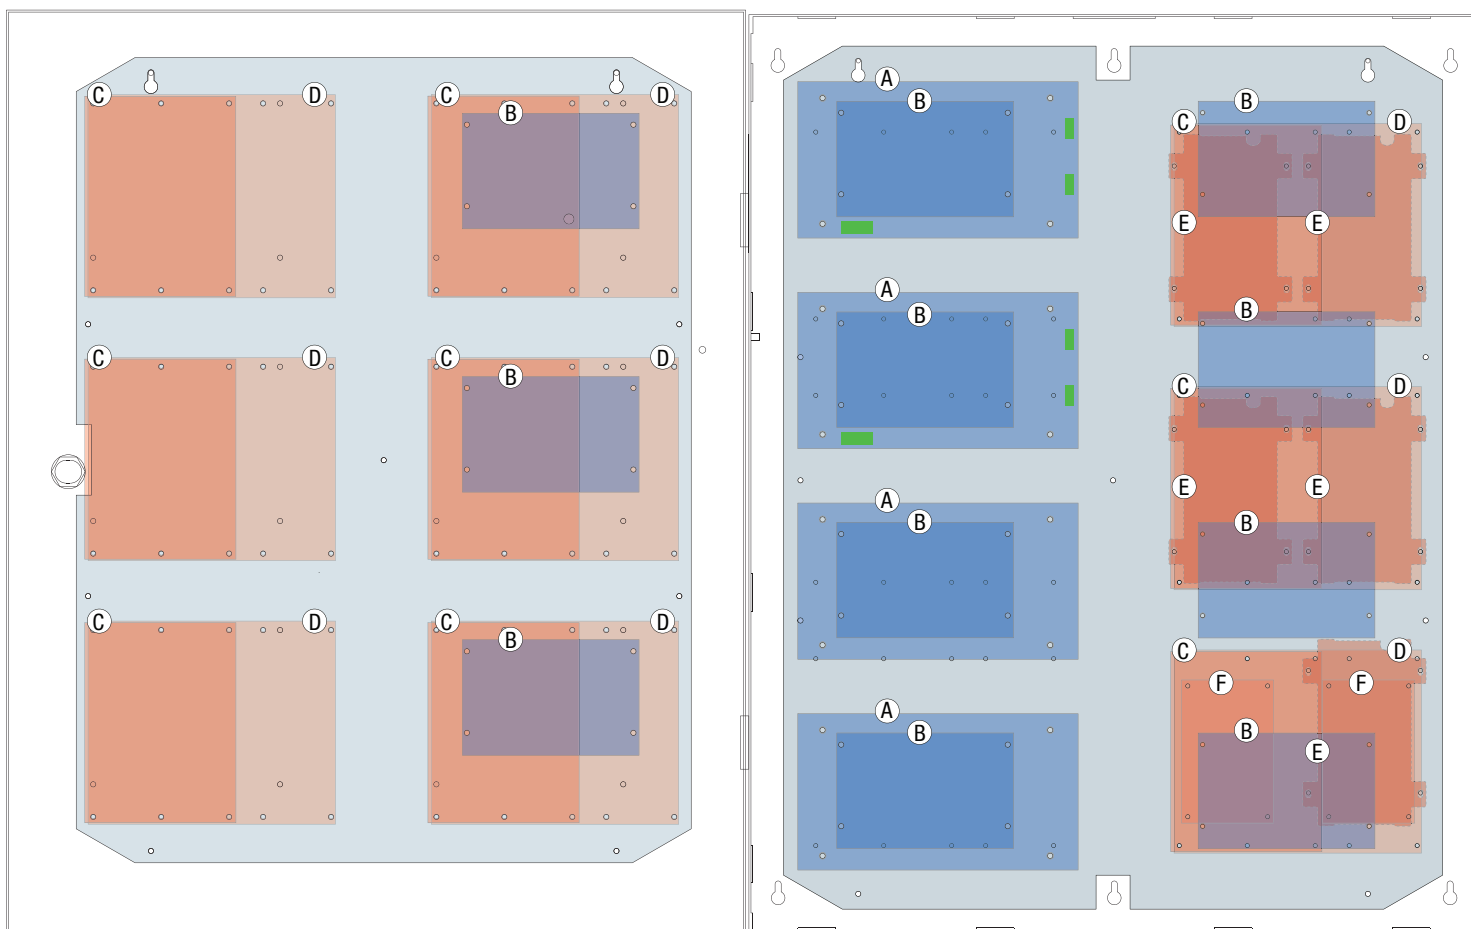

Accessories (order separately)



WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.



BR1

BR1 - Sub-Assembly Mounting Bracket

Altronix BR1 mounting bracket is compatible with Altronix Maximal and Trove enclosures. It allows to mount one (1) PD4UL(CB), PD8UL(CB), ACM4(CB), MOM5, VR6, PDS8, NetWay5B or LINQ8PD(CB) sub-assembly on the enclosure's inside wall, saving valuable space.

Trove2BWC
with
batteries



Trove2BWC
with
wires



TROVE2BWC - Battery/Wire Trough Enclosure

Altronix Trove2BWC is a dual-purpose enclosure that can be used as wiring trough or battery cabinet when mounted above or below of the Trove2 integrated power and access solution. The knockouts on the Trove2BWC have been strategically placed to line up with the Trove2 allowing for easy conduit connections between cabinets. Trove2BWC includes cam locks and 2 tamper switches to ensure access to wiring and batteries is secure.

Dimensions and Drawing

Dimensions (H x W x D approximate)

27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)

