

WayPoint30A

Outdoor AC Power Supply



Altronix WayPoint30A Outdoor Power Supply provides 24VAC and/or 28VAC distributed via two outputs for powering CCTV cameras, heaters, and other video accessories. It is designed to be conveniently located where power is required. Lightweight molded fiberglass reinforced polyester enclosure is NEMA 4/4X, IP66-11 Rated for outdoor use. It features lockable stainless steel latches and integral flanges to simplify wall or pole mounting.



WayPoint30A

Specifications

Input

Voltage 115VAC, 50/60Hz, 3.5A or
230VAC, 50/60Hz, 2.0A

Output Options

- a. 24VAC @ 12.5A max.
- b. 28VAC @ 10.5A max.
- c. Both 24VAC and 28VAC, not to exceed 10A max.

Fuse Ratings 15A /250V

Indicators (LED)

- Individual power output LED indicators
- Illuminated master power switch

Agency Listings

CE European Conformity

Physical and Environmental

Dimensions (H x W x D)

Enclosure:
13.31" x 11.31" x 5.59" (338.1mm x 287.3mm x 142mm)
Shipping:
20.25" x 12.5" x 7.25" (514.4mm x 317.5mm x 184.2mm)
NEMA 4/4X, IP66-11 Rated enclosure for outdoor use

Weight (approx.)

Product: 15.45 lb. (7.01 kg)
Shipping: 16.75 lb. (7.6 kg)


Temperature

Operating: - 20°C to 50°C (- 4°C to 122°F)
Storage: - 40°C to 70°C - 40°C to 158°F)

Relative Humidity 85% +/- 5%

BTU/Hr. (approx.): 154 BTU/Hr.

Accessories (order separately)




PMK1 - Pole Mount Kit

PMK1 pole mount kit is designed to simplify installation of outdoor units. It accommodates 2" - 8" (diameter) poles.

Lifetime Warranty

Dimensions and Drawing

Dimensions (H x W x D approximate)
13.31" x 11.31" x 5.59" (338.1mm x 287.3mm x 142mm)

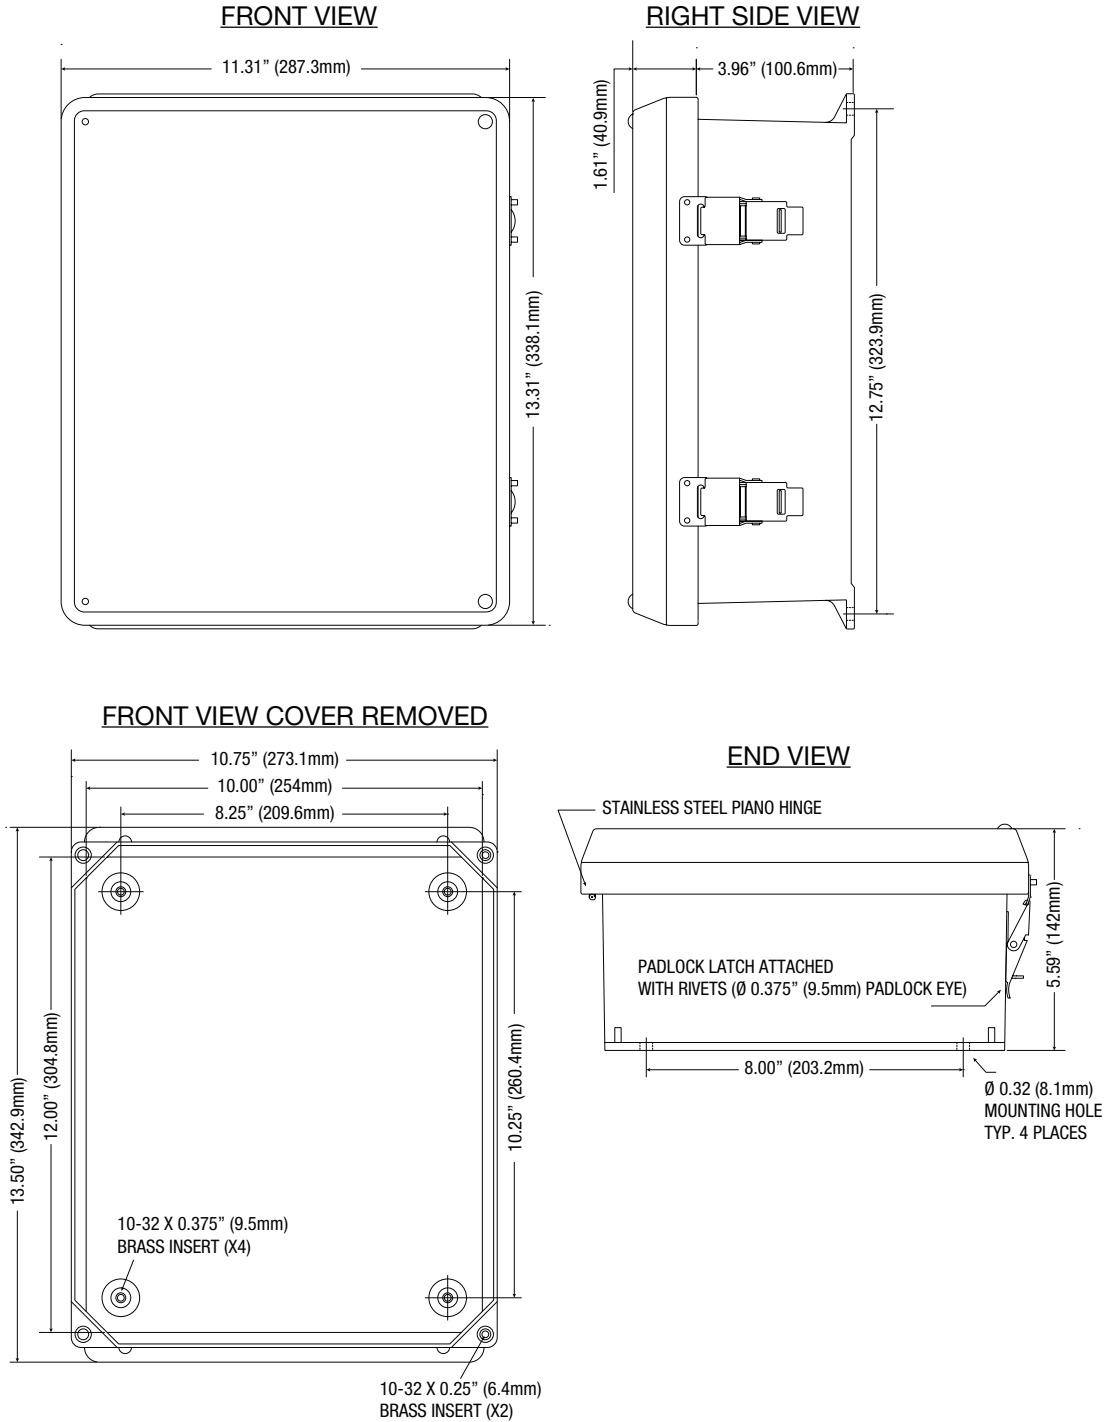

Lifetime Warranty