

WayPoint7

Outdoor DC Power Supply/Charger



Altronix WayPoint7 DC Outdoor Power Supply/Charger provides 12VDC or 24VDC and is designed to be conveniently located where power is required. Lightweight molded fiber-glass reinforced polyester enclosure is NEMA 4/4X, IP66-11 Rated for outdoor use and accommodates up to two (2) 12VDC/7AH batteries. It features lockable stainless steel latches and integral flanges to simplify wall or pole mounting.



WayPoint7

Specifications

Input

Voltage 115VAC, 60Hz, 1.9A

Outputs

Voltage 12VDC or 24VDC selectable
 Current 6A continuous supply current
 Other Short circuit and thermal overload protection
 Filtered and regulated

Battery Charging

Capacity 7AH/12VDC (1 or 2 within enclosure)
 Up to 40AH/65AH
 (Separate ventilated enclosure is required)
 Type Sealed lead acid or gel type
 Failover Upon AC loss, instantaneous
 Batteries are sold separately

Indicators (LED)

Input Input voltage is present
 DC Output Powered

Agency Listings

CE European Conformity

Physical and Environmental

Dimensions (H x W x D)

Enclosure: 13.31" x 11.31" x 5.59" (338.1mm x 287.3mm x 142mm)
 Shipping: 20.25" x 12.5" x 7.25" (514.4mm x 317.5mm x 184.2mm)
 NEMA 4/4X, IP66-11 Rated enclosure for outdoor use

Weight (approx.)

Product: 9.2 lb. (5.19 kg)
 Shipping: 10.5 lb. (5.78 kg)

Temperature

Operating: -40°C to 60°C (-40°C to 140°F)
 Storage: -40°C to 70°C (-40°C to 158°F)


Relative Humidity

85% +/- 5%

BTU/Hr. (approx.):

12VDC: 37 BTU/Hr.
 24VDC: 74 BTU/Hr.

Accessories (order separately)



PMK1

PMK1 - Pole Mount Kit


PMK1 pole mount kit is designed to simplify installation of outdoor units. It accommodates 2" - 8" (diameter) poles.

Lifetime Warranty

Dimensions and Drawing

Dimensions (H x W x D approximate)

13.31" x 11.31" x 5.59" (338.1mm x 287.3mm x 142mm)

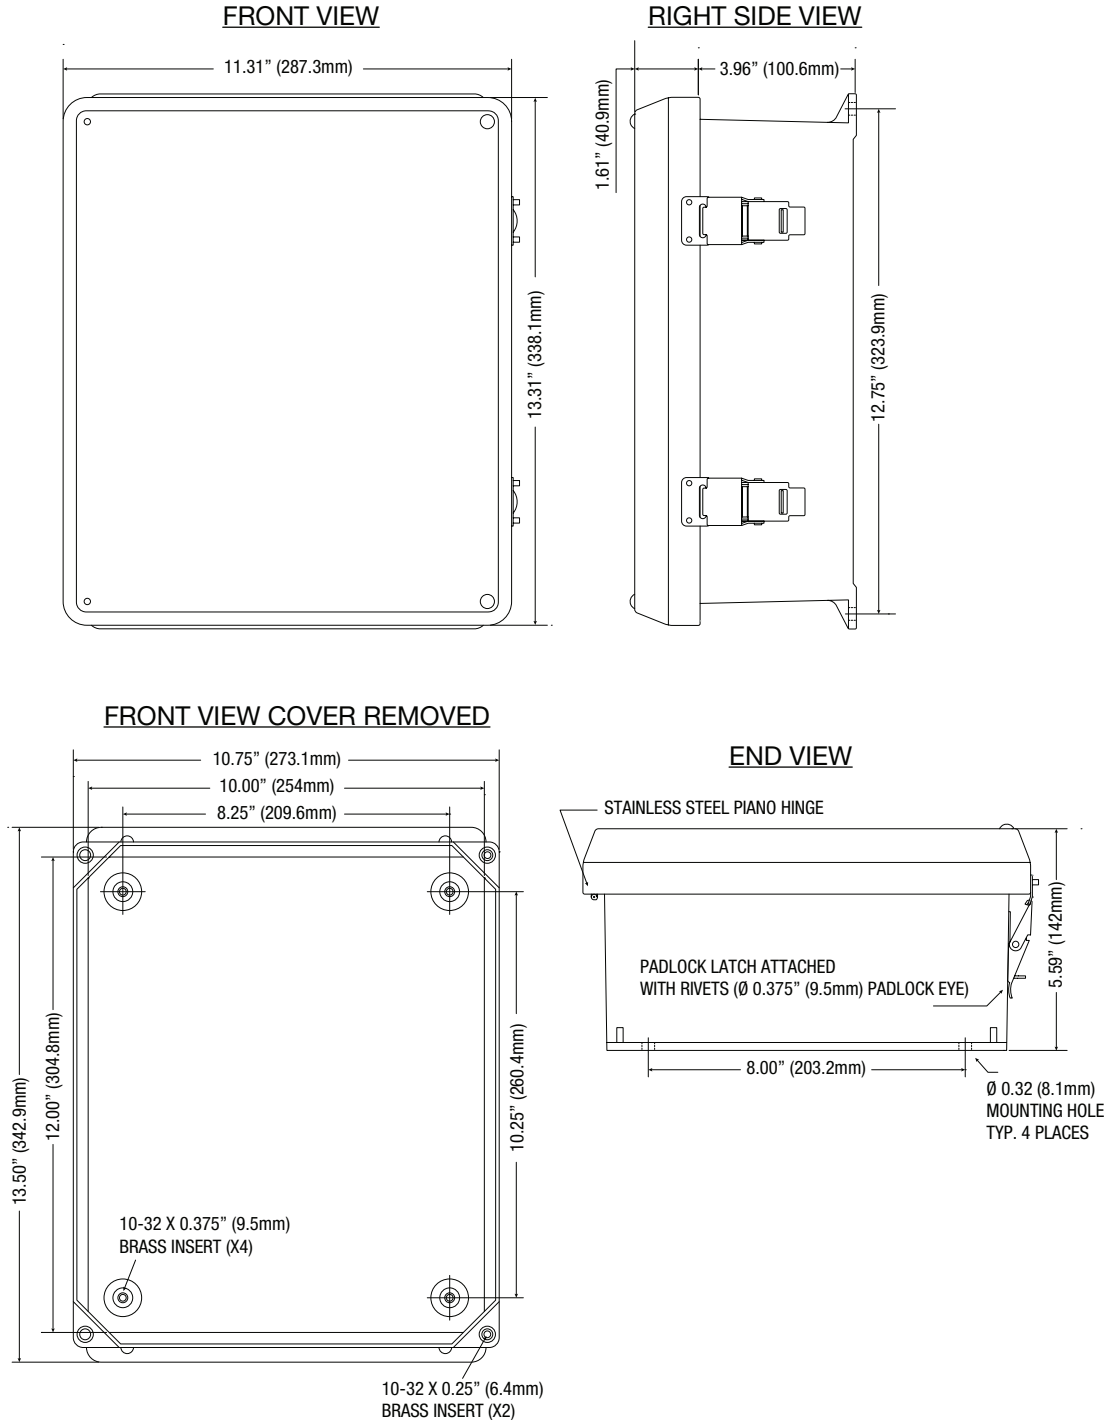

Lifetime Warranty

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com