

## eFlowNA Series

### Power Supply/Chargers with Multi-Output Access Power Controllers



Altronix eFlowNA series distribute and switch power to access control systems and accessories. They convert a 120VAC, 60Hz input into eight (8) independently controlled 12VDC or 24VDC fuse protected outputs. These power outputs can be converted to dry form “C” contacts. Outputs are activated by an open collector sink or normally open (NO) dry trigger input from an Access Control System, Card Reader, Keypad, Push Button, PIR, etc. Units will route power to a variety of access control hardware devices including: Mag Locks, Electric Strikes, Magnetic Door Holders, etc. Outputs will operate in both Fail-Safe and/or Fail-Secure modes. The FACP Interface enables Emergency Egress, Alarm Monitoring, or may be used to trigger other auxiliary devices. The fire alarm disconnect feature is individually selectable for any or all of the eight (8) outputs.



eFlow102NA8

#### Key Features

- Eight (8) independently controlled outputs
  - Output options:
    - a) Eight (8) Fail-Safe and/or Fail-Secure power outputs
    - b) Eight (8) form “C” 5A rated relay outputs.
    - c) Any combination of the above
- Eight (8) auxiliary power outputs (unswitched)
- Output fuses are rated @ 3.5A
- Filtered and electronically regulated outputs
- Supervision:
  - AC Fail
  - Battery Fail and Battery Presence
  - Low power shutdown
- Fire Alarm disconnect (latching or non-latching) is individually selectable for any or all of the eight (8) outputs
- Alarm output relay indicates that FACP input is triggered
- Fire Alarm disconnect input options:
  - a) Normally open (NO) or normally closed (NC) dry contact input
  - b) Polarity reversal input from FACP signaling circuit
- Built-in charger for sealed lead acid or gel type batteries
- Instantaneous transfer to stand-by batteries
- UL Listed in the U.S. and Canada
- CE European Conformity
- Lifetime Warranty

#### eFlowNA Series Power Supply Configuration Reference Chart

Altronix Model Number	120VAC 60 Hz Input Current (A)	Power Supply Board Input Fuse Rating	Power Supply Board Battery Fuse Rating	Maximum Supply Current for Main and Aux. Outputs (A)		Fuse Protected Outputs	Class 2 Rated Power-Limited Outputs	Current per ACM8 output (A)	ACM8 Board Input Fuse Rating	ACM8 Board Output Fuse Rating
				12VDC	24VDC					
eFlow4NA8	3.5A	5A/250V	7.5A/32V	3.3A	3.6A	8	✓	2.5A	10A/250V	2.5A/250V
eFlow6NA8	3.5A	5A/250V	10A/32V	5.3A	5.6A	8	–	2.5A	10A/250V	2.5A/250V
eFlow102NA8	3.5A	5A/250V	15A/32V	9.3A	–	8	–	2.5A	10A/250V	2.5A/250V
eFlow104NA8	4.5A	6.3A/250V	15A/32V	–	9.6A	8	–	2.5A	10A/250V	2.5A/250V

#### Lifetime Warranty

## Specifications

### Input

Voltage 120VAC, 60Hz  
Input Fuse Varies, see Reference Chart

### Outputs

Voltage 12VDC or 24VDC, see Reference Chart  
Current Varies, depending on the model  
Protection Fused 3.5A  
Auxiliary 2.5A (unswitched)  
Other Overvoltage protection  
Filtered and regulated outputs

### Battery Charging

Capacity 12AH/12VDC (1 or 2 within enclosure)  
40AH/65AH (requires separate enclosure)  
Type Sealed lead acid or gel type  
Fuse Rating Varies, see Reference Chart  
Failover Upon AC loss, instantaneous  
Batteries are sold separately

### Supervision

AC Failure Form "C" contacts  
Battery Form "C" contacts

### Low DC Power Shutdown

Shuts down DC output terminals if battery voltage drops below 71-73% for 12V units and 70-75% for 24V units (depending on the power supply). Prevents deep battery discharge

### Fire Alarm Disconnect

Supervised Latching or non-latching, individually selectable for any or all of the eight (8) outputs  
EOL 10K Resistor

### Indicators (LED)

Input 120VAC is present  
DC Output Powered  
Relays Individual LEDs indicate outputs are triggered (relays energized)  
FACP Indicates FACP disconnect is triggered

### Agency Listings

UL: UL294 Access Control System Units  
cUL: ULC-S319-05 Electronic Access Control Systems. Class I Equipment  
CSA C22.2 No.205 Signal Equipment  
CSFM California State Fire Marshall Approved  
CE European Conformity

### Physical and Environmental

#### Dimensions (H x W x D)

Enclosure: 15.5" x 12" x 4.5" (393.7mm x 304.8mm x 114.3mm)  
Shipping: 16.5" x 13.5" x 6" (419.1mm x 342.9mm x 152.5mm)

#### Product Weight / Shipping (approx.)

Model	Product Weight	Shipping Weight
eFlow4NA8	8.65 lb. (3.92 kg)	9.95 lb. (4.51 kg)
eFlow6NA8	8.6 lb. (3.9 kg)	9.9 lb. (4.49 kg)
eFlow102NA8	8.65 lb. (3.92 kg)	9.95 lb. (4.51 kg)
eFlow104NA8	8.9 lb. (4.04 kg)	10.2 lb. (4.63 kg)

#### Temperature


Operating: 0°C to 49°C (32°F to 120°F)  
Storage: -20°C to 70°C (-4°F to 158°F)

Relative Humidity 85% +/- 5%

#### BTU/Hr. (12VDC/24VDC, approx.):

Model	12VDC	24VDC
eFlow4NA8	25	50
eFlow6NA8	37	74
eFlow102NA8	61	N/A
eFlow104NA8	N/A	123

## Accessories (order separately)



LINQ2

### LINQ2 - Network Supervision

Altronix LINQ2 Network Communication Module provides remote supervision, control and monitoring over LAN/WAN

- Remotely reports accurate power diagnostics
- Controls power and resets devices
- Reports system diagnostics via Email




### Lifetime Warranty

**Dimensions and Drawing**

Dimensions (H x W x D approximate)

15.5" x 12" x 4.5" (393.7mm x 304.8mm x 114.3mm)

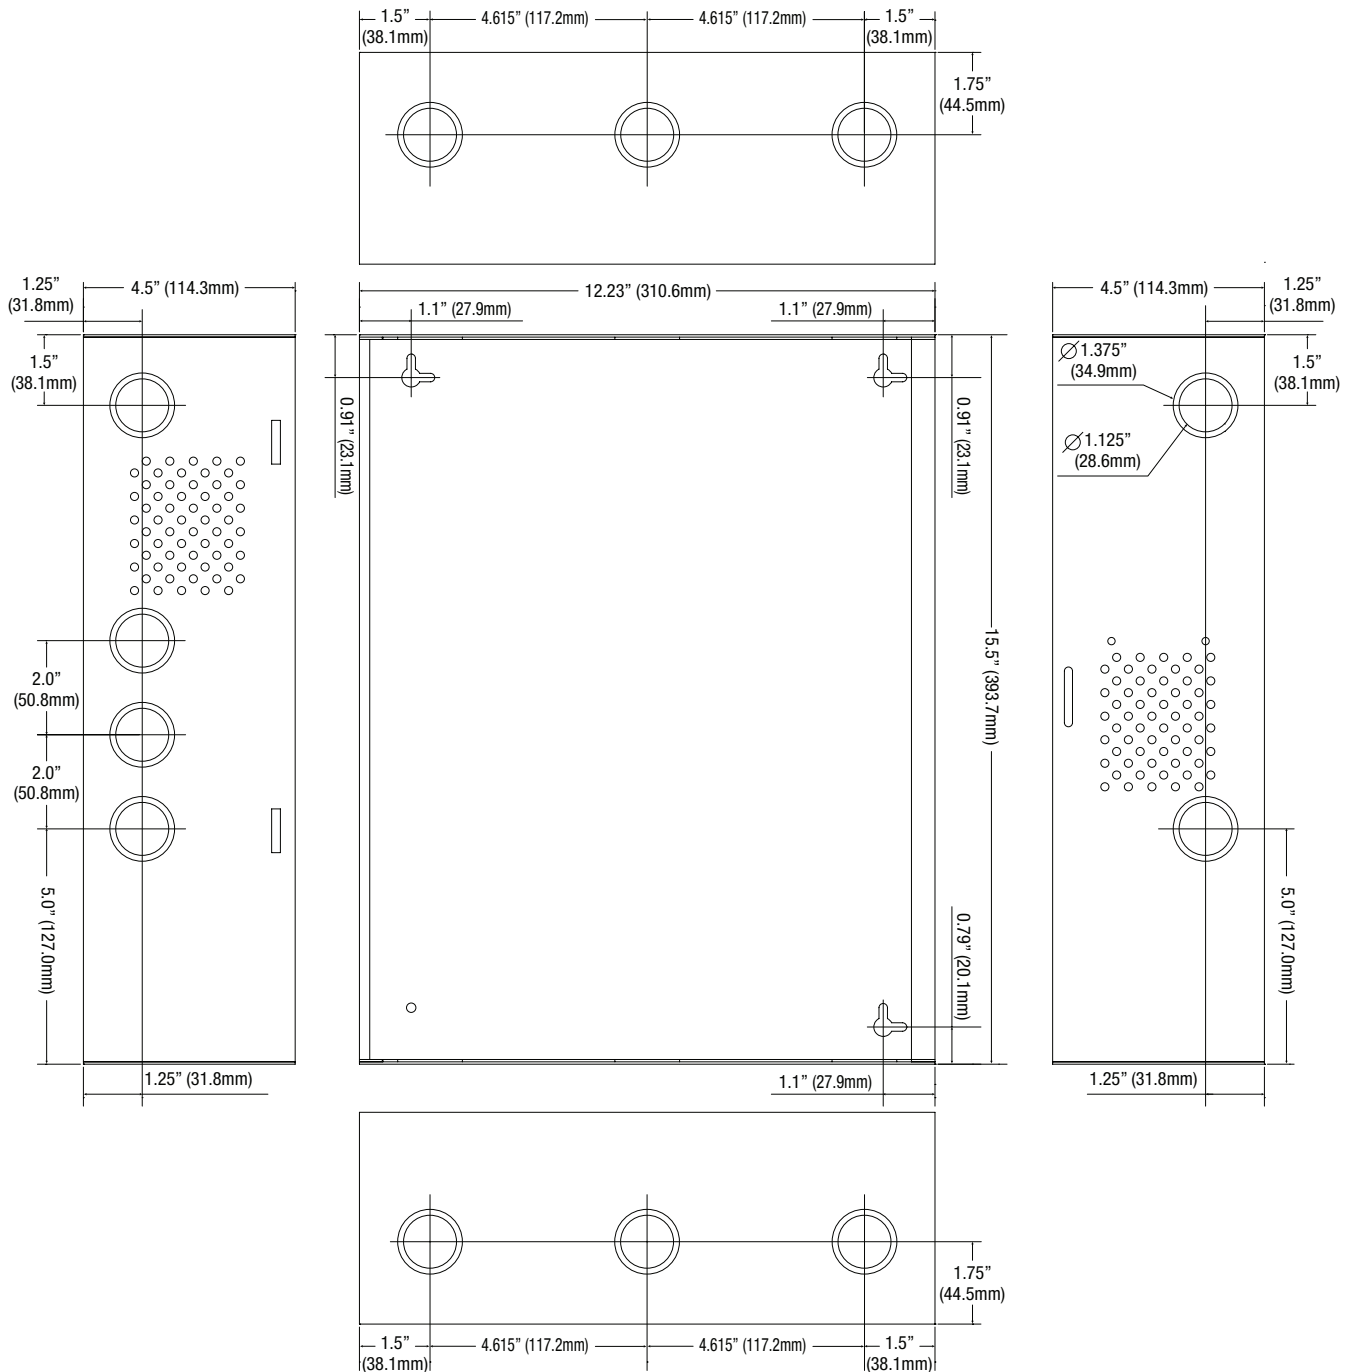

**Lifetime Warranty**

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com