



RBTUL

UL Listed Ultra Sensitive Relay Module

Specifications:

- UL Listed Burglar Alarm System SubAssembly (UL 365).
- 12VDC or 24VDC selectable operation.
- Current draw 30mA.
- 3VDC to 24VDC 2mA positive (+) trigger.
- 1A/30VDC SPDT contacts.
- Includes snap track (ST1).

Board Dimensions (W x L x H approximate):

2" x 2.75" x 1" (50.8mm x 69.85mm x 25.4mm)

Installation Instructions:

1. Mount relay in desired enclosure. Secure snap track with screws.

Be sure to provide enough clearance between PC board and snap track mounting screw head to avoid short circuit.

2. Connect DC input to terminals marked [+ (POS)] and [- (NEG)].
3. Connect DC + positive input trigger to terminal marked [TRG].



Note: If using isolated trigger connect negative (-) side of trigger voltage to the terminal marked [(NEG) -].

4. For 24VDC operation cut J1 on relay module.

SECURITY



SUBASSEMBLY
8D40

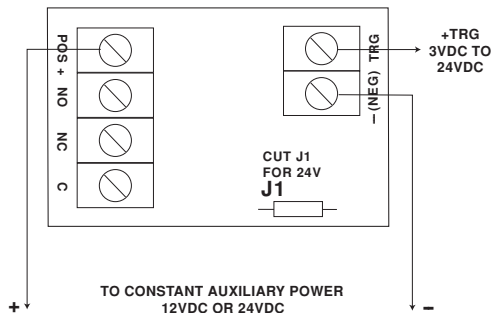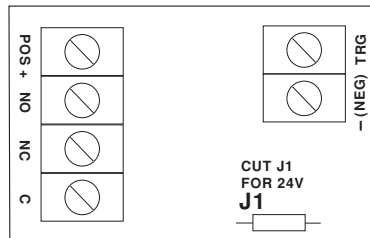

Altronix is not responsible for any typographical errors. Product specifications are subject to change without notice.

140 58th Street, Brooklyn, New York 11220 USA | phone: 718-567-8181 | fax: 718-567-9056

website: www.altronix.com | e-mail: info@altronix.com | Lifetime Warranty

IRBTUL - Rev. 061808

F21U

