

Specifications:

Agency Listings:

- UL and cUL Recognized Component.
- CE European Conformity.

Input:

- 220VAC 50/60Hz, 1.4A.

Output:

- 14A @ 24VAC or 12.5A @ 28VAC supply current.


Installation Instructions:

1. Mount transformer in the desired location/enclosure.
2. Connect AC power 220VAC to the Blue and White primary leads and connect the Red and Black flying leads as shown in the *Wiring Configuration* below (Fig. 1).
3. Measure output voltage before connecting devices. This helps avoiding potential damage.
4. Connect 24VAC or 28VAC devices to the secondary wires on the transformer. For 24VAC configuration use brown and yellow leads, for 28VAC configuration use brown and black leads (Fig. 1).

WARNING: This installation should be made by qualified service personnel and should conform to the National Electrical Code and all local codes.


Wiring Configuration:

Fig. 1

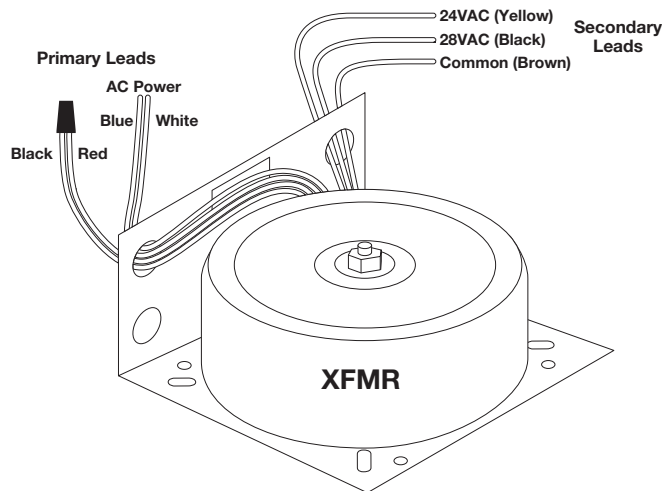

Transformer Bracket Dimensions (L x W x H approximate):

5.15" x 5.10" x 3.25" (130.8mm x 129.5mm x 82.6mm)

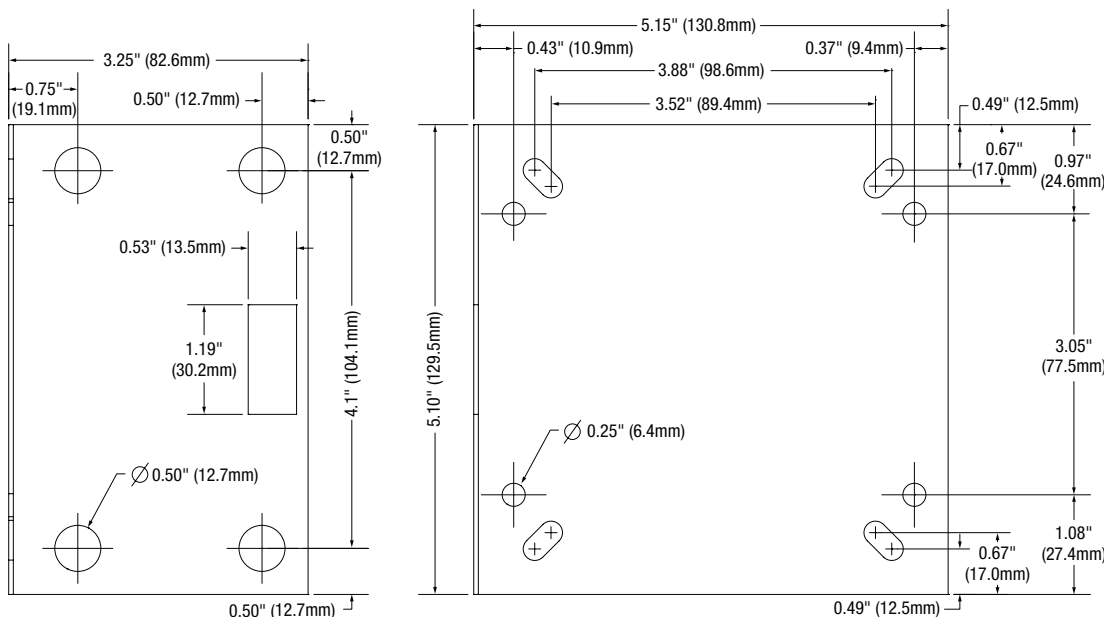

Altronix is not responsible for any typographical errors. Product specifications are subject to change without notice.