

Overview:

Altronix T2856C AC Power Supply provides 28VAC with a total of 2A of continuous supply current.

Specifications:

- Input 120VAC 50/60 Hz, 0.5A.
- 28VAC/56VA (2A) output.
- Fused input protection.
- Green grounding lead.

Replace in-line fuse with 250V, 3.5A Fuse Only.

Installation Instructions:

1. Mount the AC power supply in desired location.
2. Connect the AC (115VAC 50/60Hz) to the black and white flying leads of the transformer (*Fig. 1*).
3. Measure output voltage before connecting devices. This helps avoiding potential damage.
4. Connect devices to the terminal block on the inside back of the enclosure.
5. Upon completion of the wiring secure enclosure door with screws (supplied).


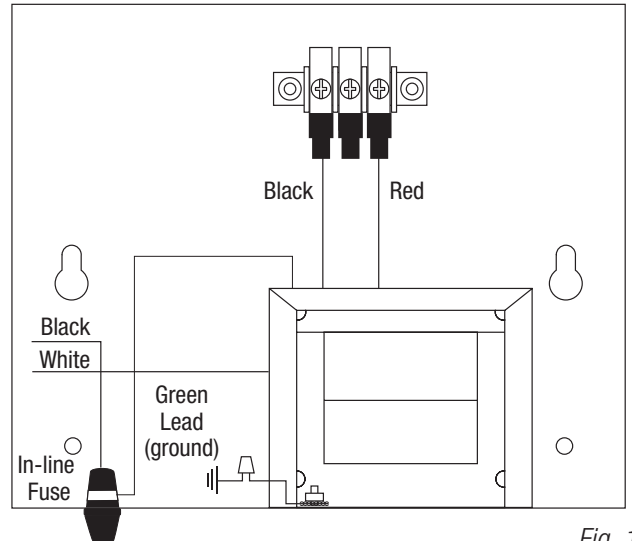


Fig. 1

WARNING: This installation should be made by qualified service personnel and should conform to the National Electrical Code and all local codes.

Enclosure Dimensions (H x W x D approximate):

5.625" x 7" x 4.5" (142.88mm x 177.8mm x 114.3mm)

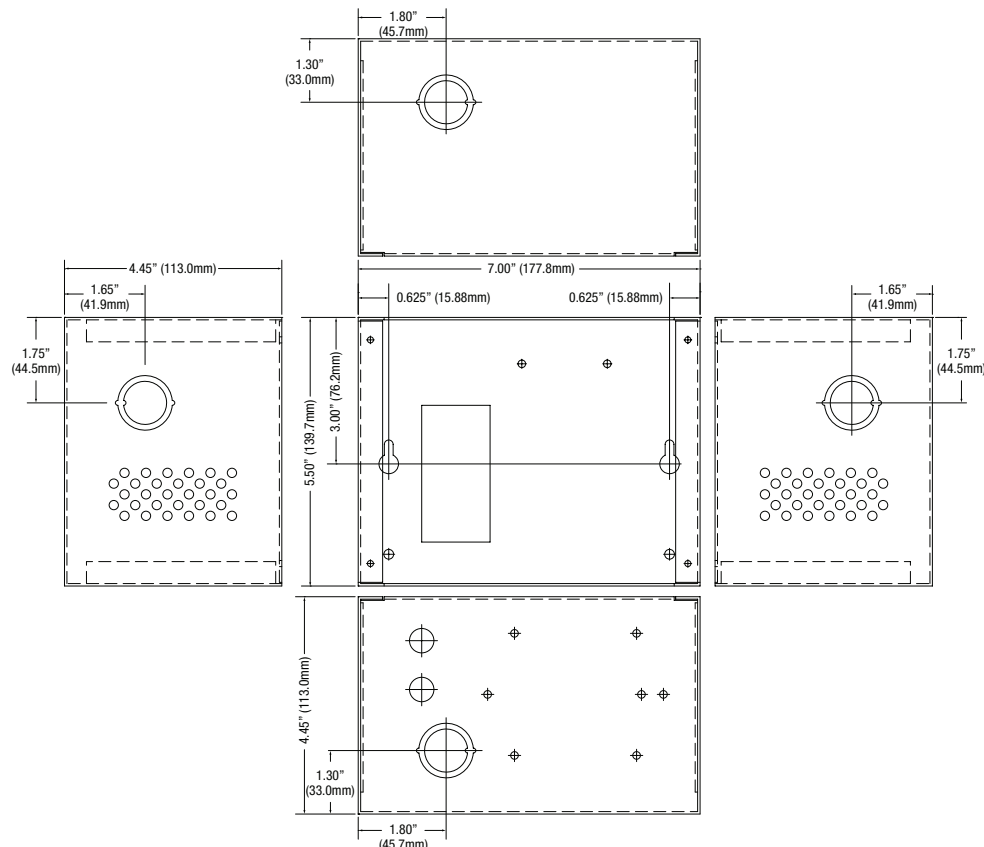

Altronix is not responsible for any typographical errors. Product specifications are subject to change without notice.