

T16175 **Open Frame Transformer**

Specification Chart:


Mode	el #	Input (Primary)	Output (Secondary)
T161	75	115VAC, 50/60Hz, 1.6A	16VAC/175VA (10.9A)

Installation Instructions:


- 1. Mount transformer in desired location/enclosure (refer to Transformer Drawing and Dimensions below).
- 2. Connect AC power 115VAC, 50/60Hz to primary leads (black and white) from terminal numbers 1 and 2 (refer to Wiring Configuration below).
- 3. Measure output voltage across the secondary leads (yellow and blue) from terminal numbers 7 and 12 (refer to Wiring Configuration below) before connecting devices. This helps avoiding potential damage.
- 4. Connect 16VAC device to be powered to the secondary leads (yellow and blue) from terminal numbers 7 and 12 (refer to Wiring Configuration below).

WARNING: This installation should be made by qualified service personnel and should conform to the National Electrical Code and all local codes.

Wiring Configuration:



Transformer Drawing and Dimensions:

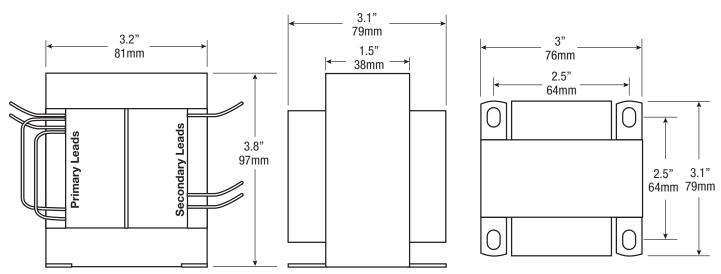

Altronix is not responsible for any typographical errors. Product specifications are subject to change without notice.

