

# AL602ADA220

## NAC Power Extender

Altronix AL602ADA220 is an extremely cost effective voltage regulated remote NAC Power Extender. It may be connected to any 24 volt Fire Alarm Control Panel (FACP). Primary applications include Notification Appliance Circuit (NAC) expansion (supports ADA requirements) and providing auxiliary power to support system accessories.



AL602ADA220

### Specifications

#### Input

|         |  |
|---------|--|
| Voltage | 220VAC (working range 198VAC - 256VAC),<br>50/60 Hz, 1.2A              |
|         | Two (2) Class A, Style Z or two (2) Class B, Style W, X, Y FACP inputs |
|         | Two (2) NC dry contact trigger inputs                                  |

#### Output

|           |  |
|-----------|--|
| Voltage   | 24VDC  |
| Current   | 6.5A max. total alarm current<br>2.5A max. current per output                          |
| Auxiliary | 1A   |
| Other     | Thermal and short circuit protection with auto reset<br>Filtered and regulated outputs |

#### Programmable Supervised Indicating Circuit Outputs:

Four (4) Class B, Style W, X, Y, or Two (2) Class A, Style Z or  
One (1) Class A, Style Z and Two (2) Class B, Style W, X, Y

#### Battery Charging

|          |                               |
|----------|-------------------------------|
| Type     | Sealed lead acid or gel type  |
| Failover | Upon AC loss, instantaneous   |
|          | Batteries are sold separately |

#### Supervision

|            |                   |
|------------|-------------------|
| AC Failure | Form "C" contacts |
| Battery    | Form "C" contacts |

#### Indicators (LED)

|                                |                          |
|--------------------------------|--------------------------|
| AC Power (Green)               | Input voltage is present |
| DC Output (Red)                | Powered                  |
| Logic Board<br>(Red and Green) | Output status            |

### Special Features

- 2-wire horn/strobe Sync mode allows audible notification appliances (horns) to be silenced while visual notification appliances (strobes) continue to operate
- Sync protocols include Potter/Amseco, Faraday, Gentex®, System Sensor®, and CooperWheelock®
- Temporal Code 3, Steady Mode, Input to Output Follower Mode (maintains synchronization of notification appliances circuit)
- Compatible with 12VDC or 24VDC fire panels
- Output loop supervision steered to Input 1 or Input 2
- Signal circuit trouble memory (helps identify intermittent loop problems)
- Common trouble input and output for external trouble signals tie-in
- Ground fault detection.

### Physical and Environmental

#### Dimensions (H x W x D)

Enclosure: 15.5" x 12" x 4.5" (393.7mm x 304.8mm x 114.3mm)  
Shipping: 16.5" x 13.5" x 6" (419.1mm x 342.9mm x 152.48mm)

Enclosure accommodates up to two (2) 12VDC/12AH batteries

#### Weight (approx.)

Product: 9.6 lb. (4.35 kg)  
Shipping: 12.3 lb. (5.58 kg)

#### Temperature

Operating: 0°C to 49°C (32°F to 120°F)  
Storage: - 20°C to 70°C (- 4°F to 158°F)

Relative Humidity 85% +/- 5%


BTU/Hr (approx.) 31 BTU/Hr.

### Lifetime Warranty

### Dimensions and Drawing

Dimensions (H x W x D approximate)

15.5" x 12" x 4.5" (393.7mm x 304.8mm x 114.3mm)

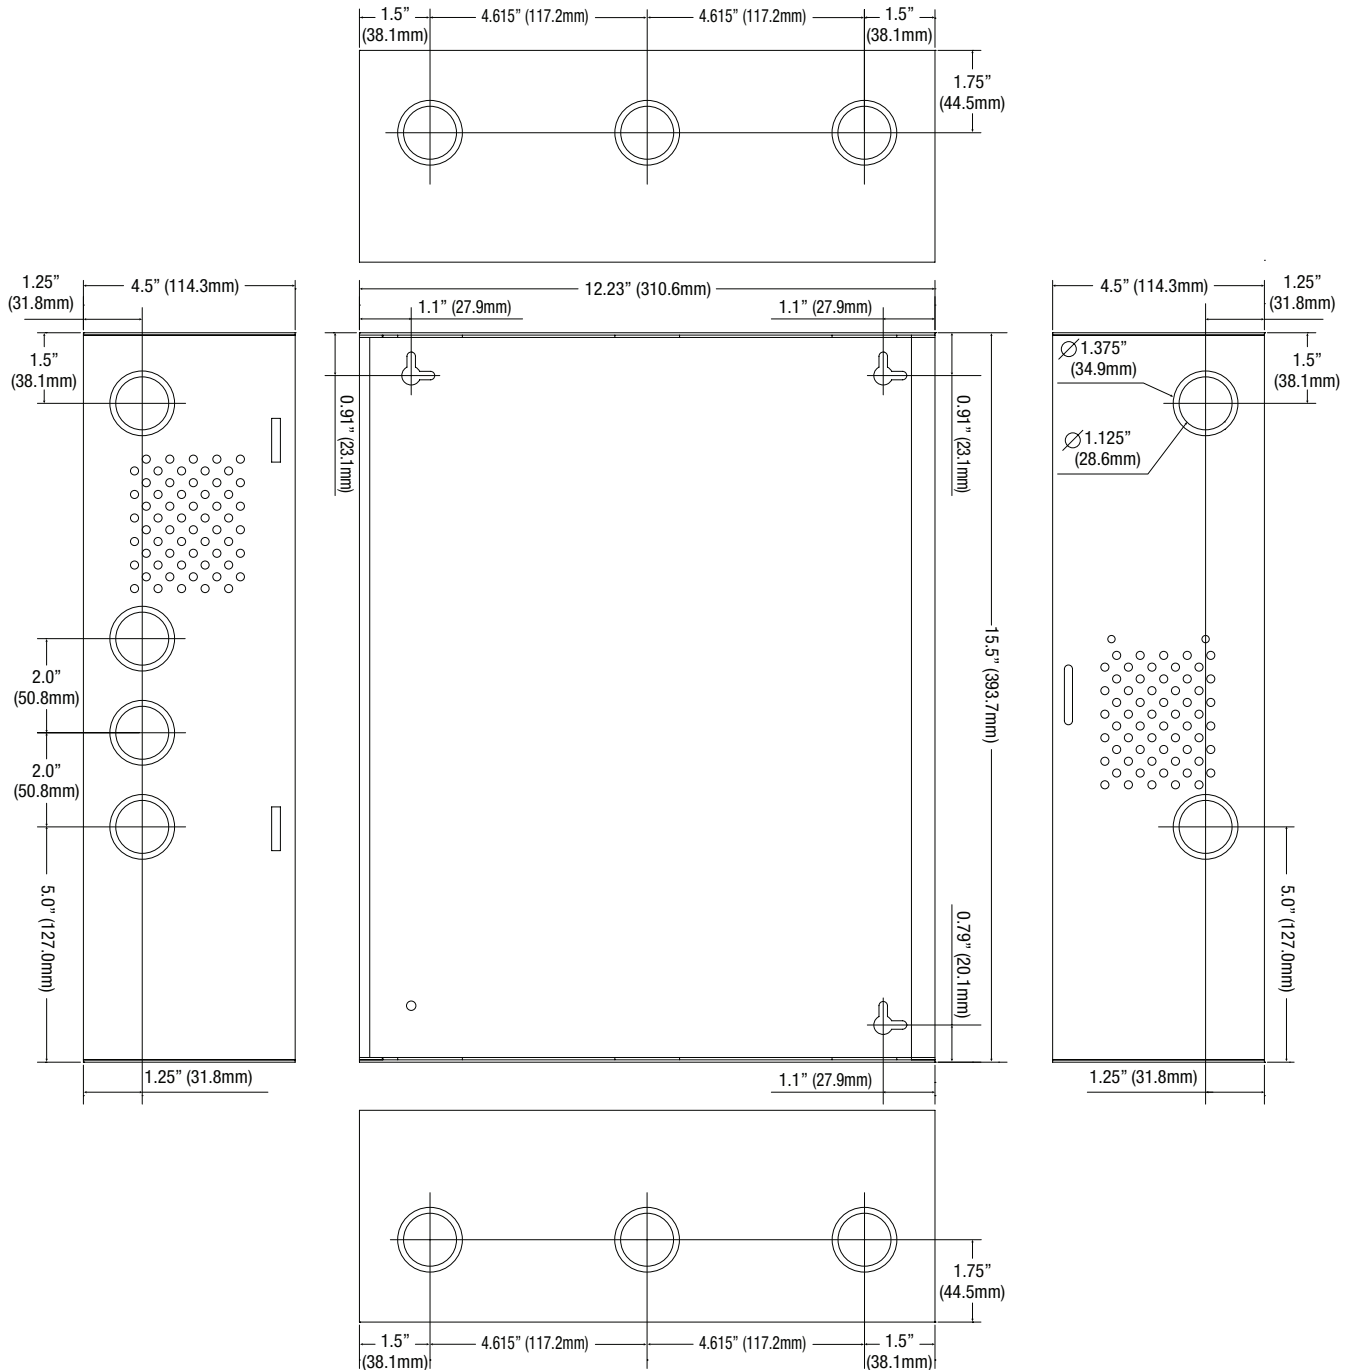

### Lifetime Warranty

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com