


NetWay4EBTPL3

4-port Hardened 4PPoE (802.3bt) Switch with Integral Power on a Backplane



Altronix NetWay4EBTPL3 supports up to 90W per port (360W total power) for deploying the latest high-powered IP devices in remote locations. It is equipped with one (1) 1Gb SFP port to transmit data at long distances and four (4) 802.3bt compliant Ethernet ports. NetWay4EBTPL3 accommodates single/multi-mode fiber cable to deliver data from NetWay Spectrum head-end media converters/injectors. Embedded LINQ Technology allows to monitor, control, and report power and diagnostics from anywhere.

For unmanaged switch see model NetWay4E1BTPL3

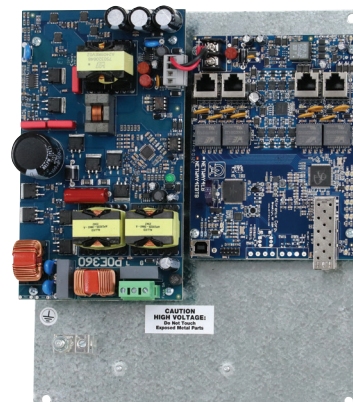

NetWay4EBTPL3

Key Features


- Four (4) 10/100/1000 Mbps Ethernet ports rated at 90W each (limited to 360W total power)
- IEEE 802.3af, 802.3at, 802.3bt compliant
- One (1) Gigabit SFP port
- VLAN (Virtual Local Area Networks) subnetwork allows for the grouping together of devices for improved network traffic and higher security
- Built-in charger for sealed lead acid or gel type batteries
- CE European Conformity
- Switch and power supply are factory mounted on a backplane
- LINQ Technology:
 - Remote network management allows for camera/device reset and diagnostic monitoring
 - Provides local and/or remote access to critical information via LAN/WAN
 - Email and Windows Dashboard Alert notifications report real-time events
 - Event log tracks history

Similar products

NetWay4EBTWPX3	Outdoor 4-port Hardened 4PPoE Switch with Integral Power in NEMA 4/4X, IP66-11 enclosure which accommodates stand-by batteries
NetWay4EBTWP3	Outdoor 4-port Hardened 4PPoE Switch with Integral Power in NEMA 4/4X, IP66-11 enclosure
NetWay4EBTX3	4-port Hardened 4PPoE Switch with Integral Power in NEMA 1 Rated indoor enclosure

Lifetime Warranty

Typical Application

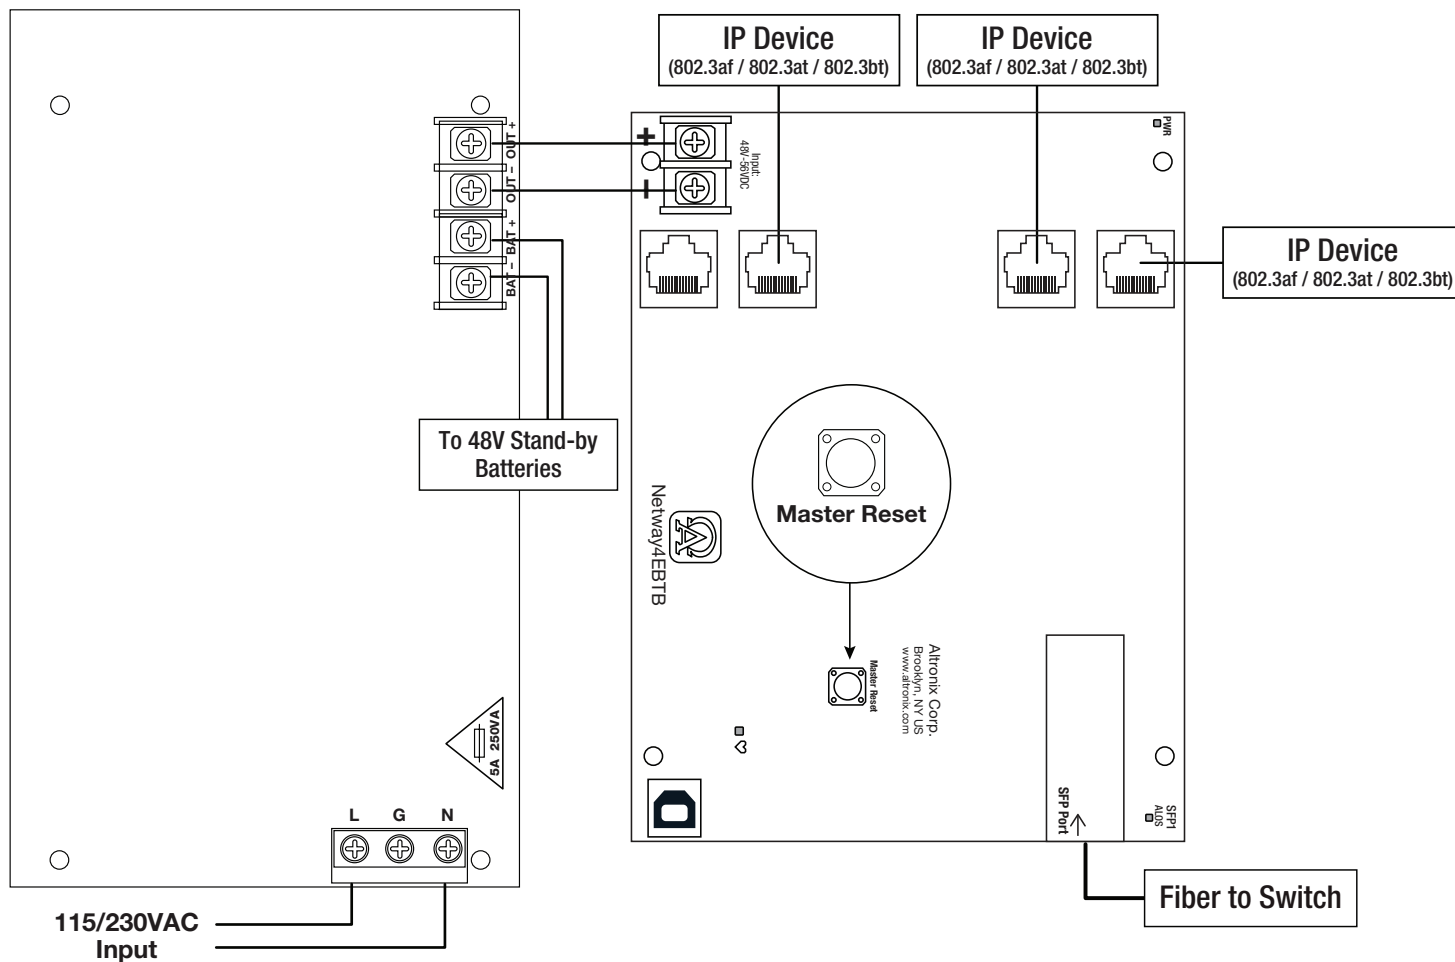

Lifetime Warranty

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

NetWay4EBTPL3

4-port Hardened 4PPoE (802.3bt) Switch with Integral Power on a Backplane



Specifications

Input

Voltage	115VAC, 60Hz, 3.5A or 230VAC, 50/60Hz, 2A
Input Fuse	5A/250V

Power Output

Maximum Power	Four (4) PoE ports rated at 90W each, 360W total power max. IEEE 802.3af (15W), IEEE 802.3at (30W), IEEE 802.3bt (90W) compliant Integral surge protection
---------------	---

SFP Ports: One (1) Gigabit SFP port

Ethernet Ports: Four (4) 10/100/1000 Mbps ports
Connectivity: RJ45, auto-crossover
Wire type: 4-pair CAT5e or higher structured cable
Speed: 10/100/1000 Mbps, half/full duplex, auto negotiation

Battery Charging

Type	48VDC charging circuit charges sealed lead acid or gel type batteries (require separate ventilated enclosure)
------	---

Failover Upon AC loss, instantaneous

Batteries are sold separately
Separate ventilated enclosure is required

Indicators (LED)

Individual PoE On LEDs for each port
Individual IP Link status, 10/100/1000 Base-T/active LEDs for each port
ALOS LED indicates fiber connection for SFP port
Heartbeat LED indicates proper operation of the unit

VLAN:

Multiple management VLAN assignment
802.1Q Tagged VLAN
Up to 10 VLAN groups. ID Range 2-4095.

LINQ Technology:

Remote network management allows for camera/device reset and diagnostic monitoring
Provides local and/or remote access to critical information via LAN/WAN
Email and Windows Dashboard Alert notifications report real-time events
Event log tracks history.

Agency Listings

CE European Conformity

Physical and Environmental

Dimensions (H x W x D)

Backplane:	10.75" x 8.875" x 2.375" (273.1mm x 225.4mm x 60.3mm)
Shipping:	12" x 10" x 8" (304.8mm x 254mm x 203.2mm)

Weight (approx.)

Product:	2.6 lb. (1.18 kg)
Shipping:	4.0 lb. (1.81 kg)

Temperature

360W:	-30°C to 70°C (-22°F to 158°F)
240W:	-30°C to 75°C (-22°F to 167°F)
Storage	-30°C to 85°C (-22°F to 185°F)

Relative Humidity 85% +/- 5%

BTU/Hr (approx.) 183 BTU/Hr.

Operating Altitude: -304.8 to 2,000m

Accessories (order separately)



SFP Modules - Hot Pluggable Transceivers

P1MM	Multi-Mode SFP Module for distances up to 550m
P1SM10	Single-Mode SFP Module for distances up to 10km
P1AB2K	Single Strand SFP Module for distances up to 2km
P1GCE	Copper SFP Module for distances up to 100m



NetWaySP1A

Ethernet over Fiber Media Converter/Repeater for Applications Requiring an Additional SFP (Fiber) Port
NetWaySP1A PoE powered media converter/repeater converts 10/100/1000 Mbps to Fiber (1000Base-X/SX/LX).

Lifetime Warranty


Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

Dimensions and Drawing

Backplane Dimensions (H x W x D approximate)

10.75" x 8.875" x 2.375" (273.1mm x 225.4mm x 60.3mm)

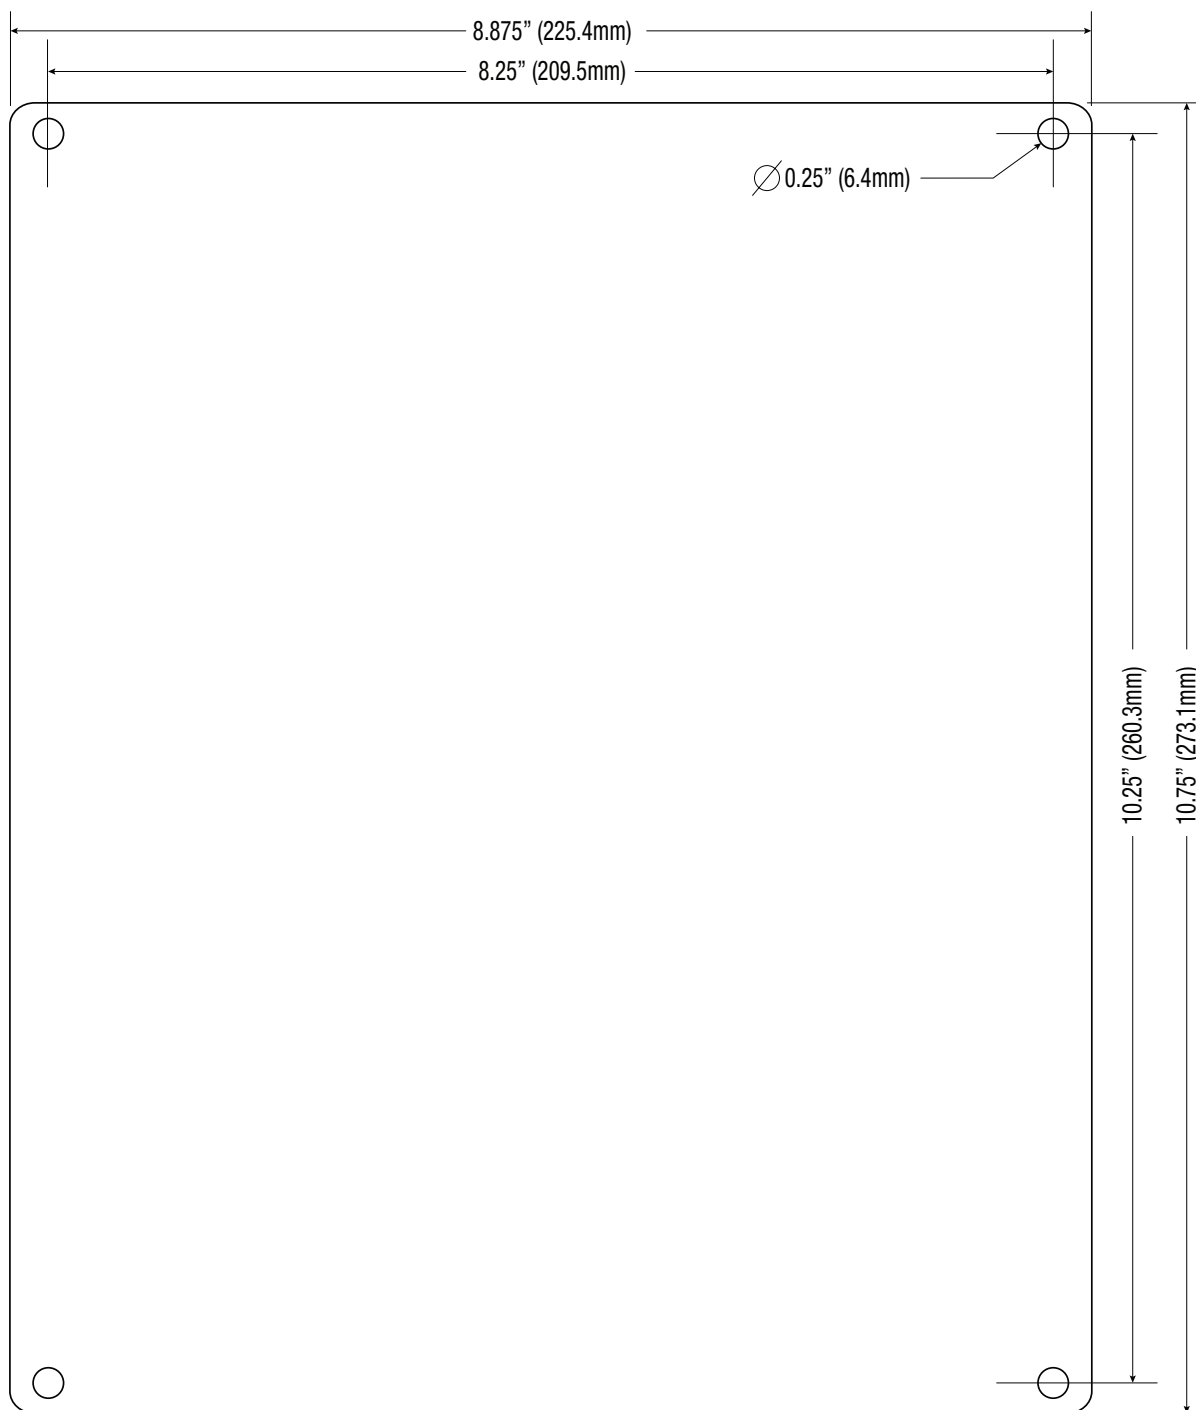**Lifetime Warranty**

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com