SWIFTLANE

Rev. 12102025

T1SFK3F8S (Kit)

Access & Power Integration Solution for Swiftlane

Altronix TROVE

Altronix T1SFK3F8S kit consists of Trove1 enclosure, TSF1 Altronix/Swiftlane Controls backplane with one (1) 12VDC or 24VDC @ 6A power supply/charger, 12VDC voltage regulator and eight (8) fuse protected output dual voltage power distribution module. This kit also accommodates two (2) Swiftlane Controls Door Controller 5 (SL-DCU-5) boards. Trove simplifies board layout and wire management, reduces installation time and labor costs.

T1SFK3F8S

Swiftlane boards are not included

Key Features

- 12VDC or 24VDC power supply/charger
- Accommodates two (2) Swiftlane Controls Door Controller 5 (SL-DCU-5) boards
- Convenient knockout configuration:
  - One (1) double knockout 1.948" (1-1/2" Conduit)
  - Nine (9) double knockouts 1.362" (1" Conduit) / 1.115" (3/4" Conduit)
- 16 gauge galvanized steel backplane simplifies board layout and wire management
- Enclosure accommodates up to two (2) 12VDC/7AH batteries
- Supervision
  - AC Fail
  - Low Battery and Battery Presence
  - Low power shutdown
- Agency Listings:
  - All Altronix components of this Trove kit are UL Listed sub-assemblies. Please refer to the Sub-Assembly Installation Guides for further information
    - UL: UL294 - Access Control System
    - cUL: CAN/ULC - s319-05 - ElectronicAccess Control Systems
  - CE European Conformity
- Lifetime Warranty*

**Altronix Power Supply/Chargers and Sub-Assemblies only*

Accessories (order separately)

LINQ2

LINQ2 - Network Supervision

Altronix LINQ2 Network Communication Module provides remote supervision, control and monitoring over LAN/WAN

- Remotely reports accurate power diagnostics
- Controls power and resets devices
- Reports system diagnostics via Email

WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.

Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/accessories in any metal enclosure or backplane.

SWIFTLANE

T1SFK3F8S (Kit)

Access & Power Integration Solution for Swiftlane

Altronix TROVE

Specifications

Power Supply (eFlow6NB):

Input

Voltage	120VAC, 60Hz
Input Fuse	5A/250V

Output

Voltage	24VDC
Current	6A continuous
Other	Overvoltage protection Filtered and regulated

Battery Charging

Capacity	12VDC/7AH (2 within enclosure) 40AH/65AH (requires separate enclosure)
Type	Sealed lead acid or gel type
Failover	Upon AC loss, instantaneous

Batteries are sold separately

Supervision

AC Failure	Form "C" contacts
Battery	Form "C" contacts

Low DC Power Shutdown

Shuts down DC output terminals if battery voltage drops below 70-75% for 24V units (depending on the power supply)
Prevents deep battery discharge

Indicators (LED)

Input	120VAC is present
DC Output	Powered
Battery	Discharged or not connected

Voltage Regulator (VR6):

Input

Voltage	24VDC from eFlow6NB

Output

Voltage	12VDC
Current	6A continuous
Other	Surge suppression

Indicators (LED)

Input	24VDC is present
Output	Powered

Dual Input Power Distribution Module (PDS8)

Input

Voltage	24VDC from eFlow6NB and 12VDC from VR6
Input Fuses	10A/32V

Outputs

Voltage	12VDC and/or 24VDC

Any of the eight (8) power outputs are selectable to follow power Input 1 or Input 2
Individual outputs may be set to OFF position for servicing

Output Fuses	3A/32V

Indicators (LED)

DC Output	Eight (8) individual output LEDs
Green:	12VDC
Red:	24VDC

T1SFK3F8S Kit:

Agency Listings

All components of this Trove kit are UL Listed sub-assemblies. Please refer to the corresponding Sub-Assembly Installation Guides for further information

CE	European Conformity

Physical and Environmental

Dimensions (H x W x D)

Enclosure:
18" x 14.5" x 4.62" (457.2mm x 368.3mm x 118.0mm)
Shipping:
21.75" x 18.25" x 5.75" (552.5mm x 463.6mm x 146.1mm)

Weight (approx.)

Product	15.5 lb. (7.0 kg)
Shipping	19.5 lb. (8.9 kg)

Temperature

Operating	0ºC to 49ºC (32ºF to 120ºF)
Storage	– 20ºC to 70ºC (– 4ºF to 158ºF)

Relative Humidity	85% +/– 5%
BTU/Hr (approx.):	12VDC: 40 BTU/Hr 24VDC: 77 BTU/Hr

SWIFTLANE

T1SFK3F8S (Kit)

Access & Power Integration Solution for Swiftlane

Altronix TROVE

Access Controller Position Chart for Swiftlane Controls Door Controller 5 (SL-DCU-5):

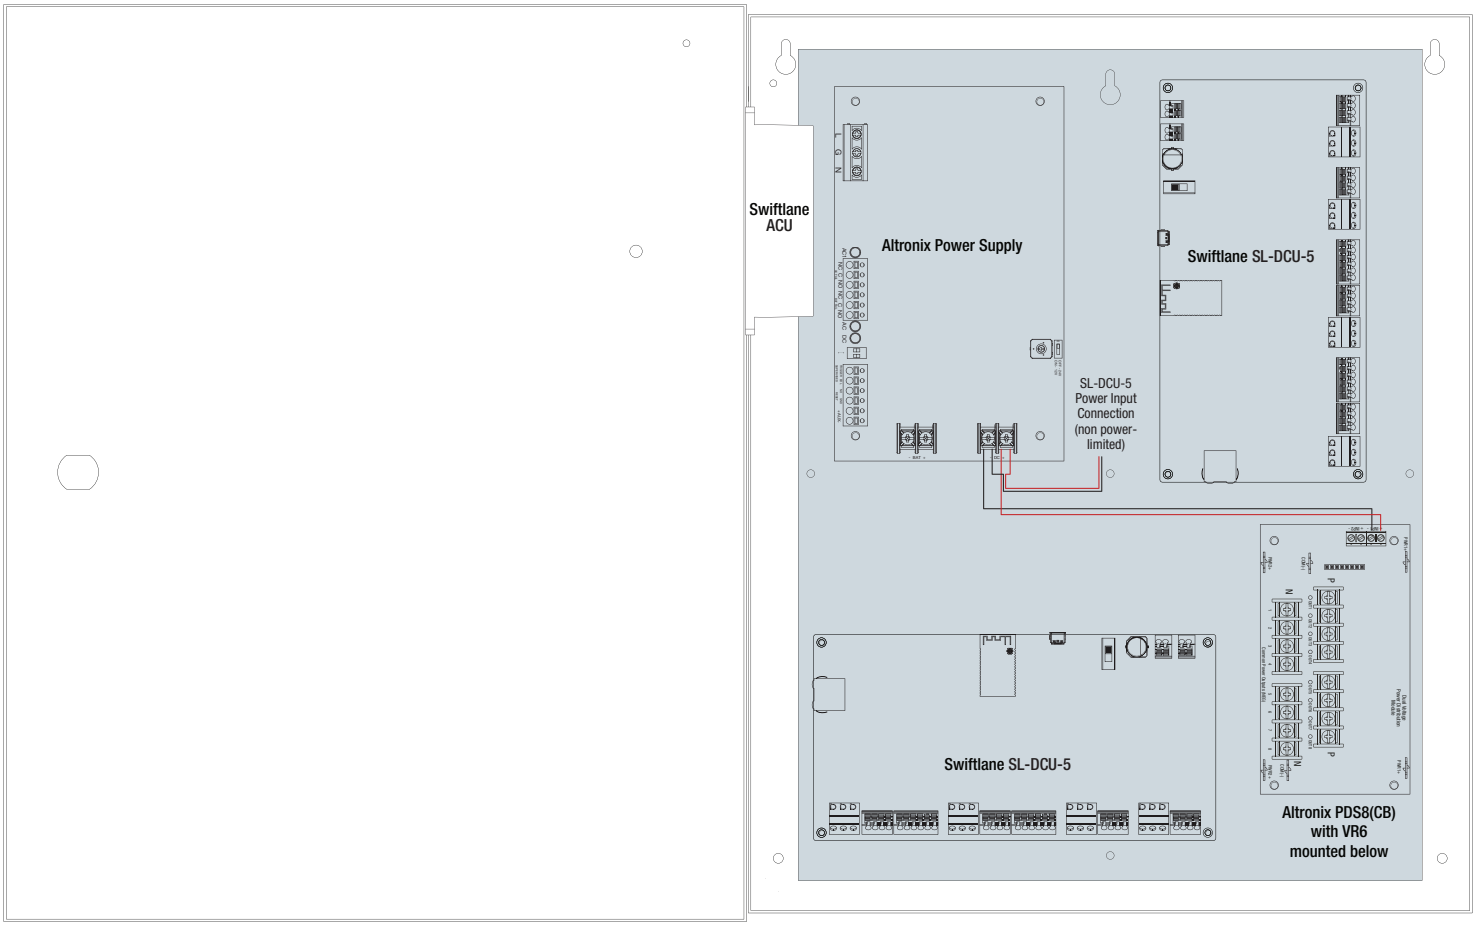

SWIFTLANE

T1SFK3F8S (Kit)

Access & Power Integration Solution for Swiftlane

Altronix TROVE

Dimensions and Drawing

Dimensions (H x W x D approximate)
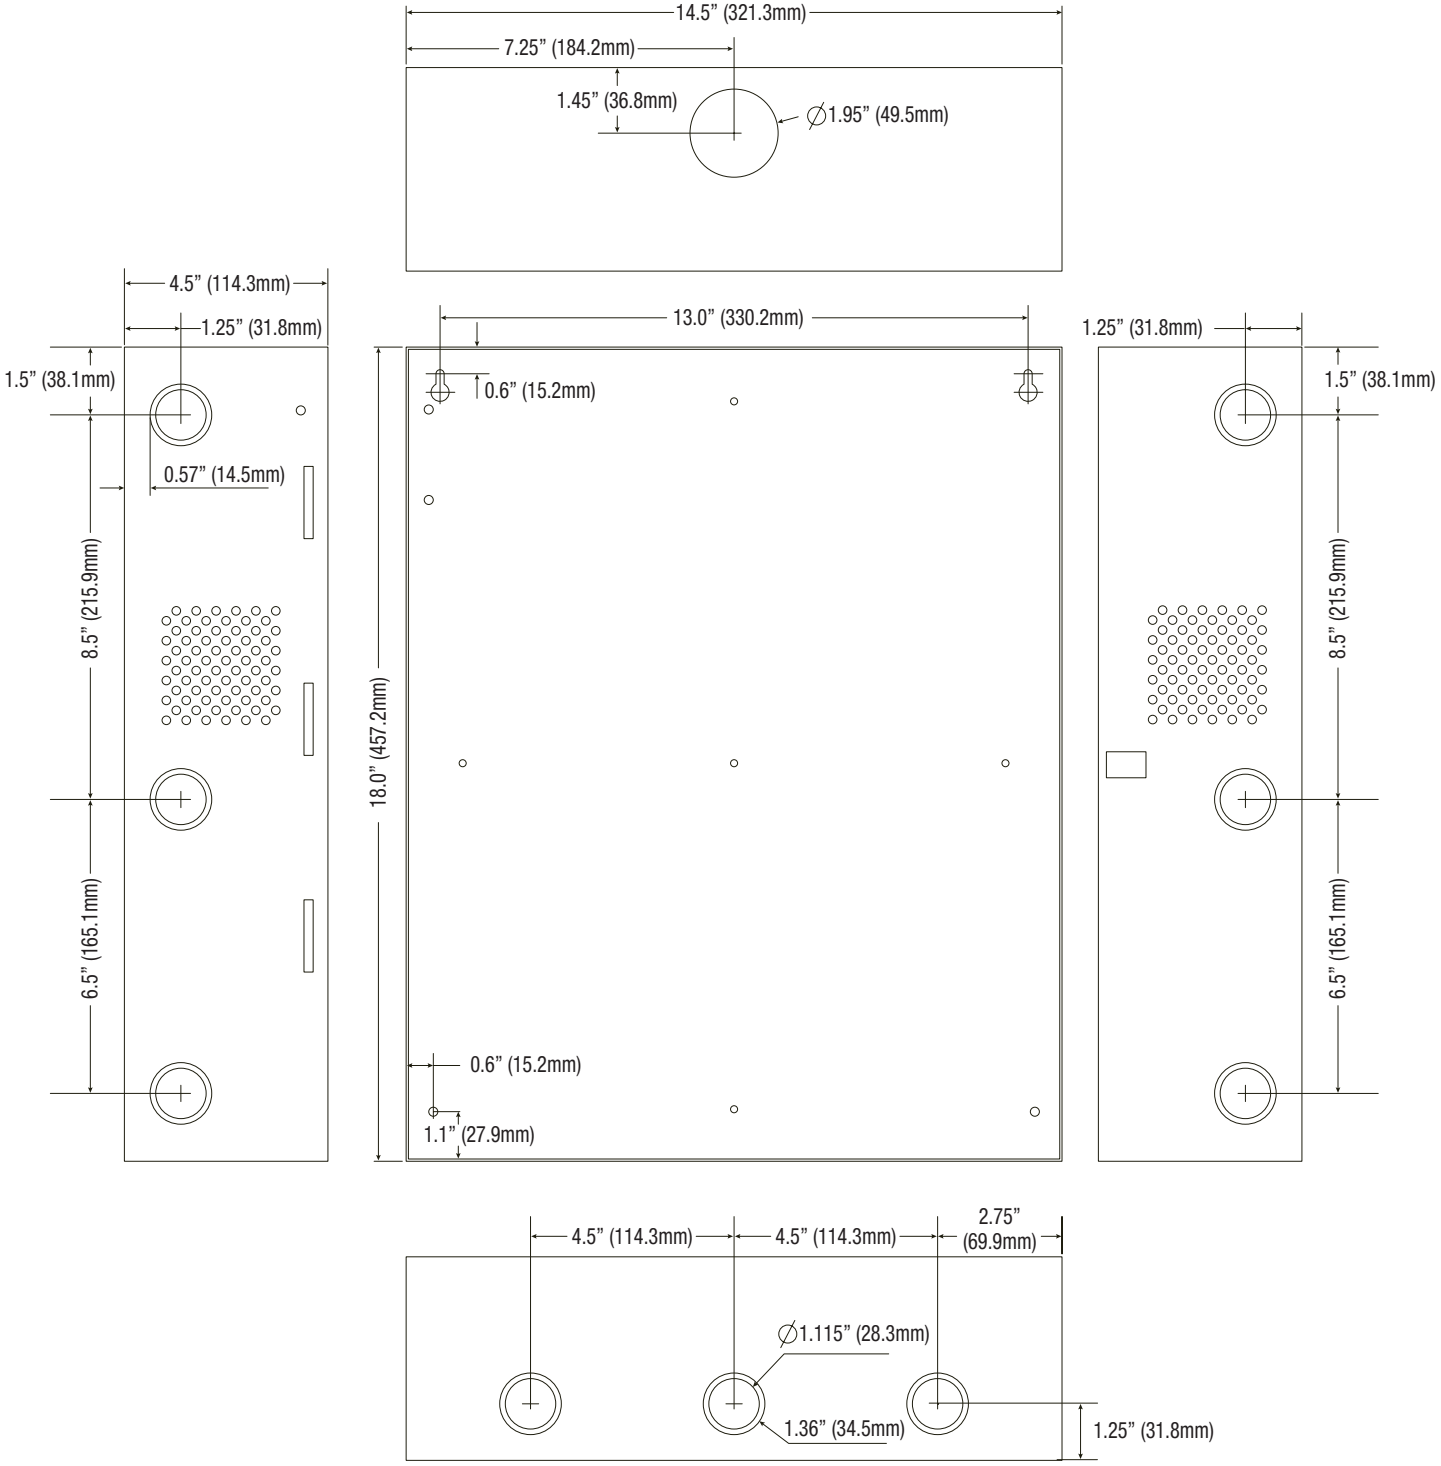
18" x 14.5" x 4.62" (457.2mm x 368.3mm x 118.0mm)